

D.C. Voltmeters and Ammeters





D.C. AMMETERS AND VOLTMETERS

GENERAL

Weston D.C. Ammeters and Voltmeters are all conventional permanent magnet moving coil instruments, their basic movement design being suitably adaptable to meet a variety of applications in aircraft instrumentation.

Standard calibrated dials have white markings on a black background (photogenic), but dials can also be made available with fluorescent markings on a black background or black markings on a white background.

All indicators in this section may be supplied with markings representing other quantities i.e. Position, Pressure, Temperature and Contents.


D.C. AMMETERS

For current ranges of 500 mA and above D.C. Ammeters are designed to operate in conjunction with external shunts. Under these conditions the indicator is constructed as a millivoltmeter and is calibrated so that its readings are proportional to the voltage drop across the external shunt and therefore to the current flowing through the shunt.

To enable a Shunt/Ammeter combination to operate accurately and safely under conditions of overload the range of the indicator should be such that the maximum working current does not normally exceed 2/3rds of the maximum shunt current value.


Weston Ammeters are normally calibrated allowing for an external lead resistance of 0.5 ohm. Any departure from this value must be mentioned at the time of ordering.

Plugs and sockets are not normally recommended for connection purposes and screw terminals sizes No.6UNC or No.4 BA are normally used to provide good terminal/lead contact.

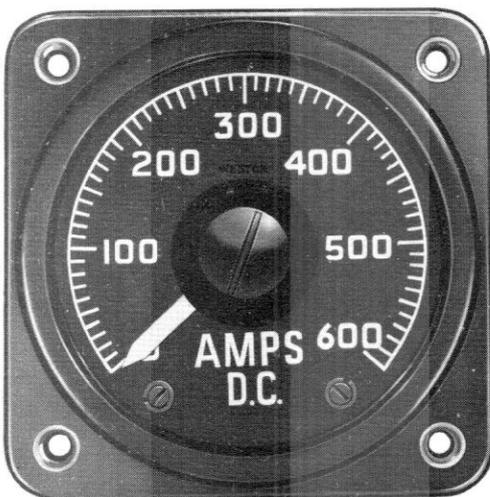

Model S 451 Form 4

Typical Presentation

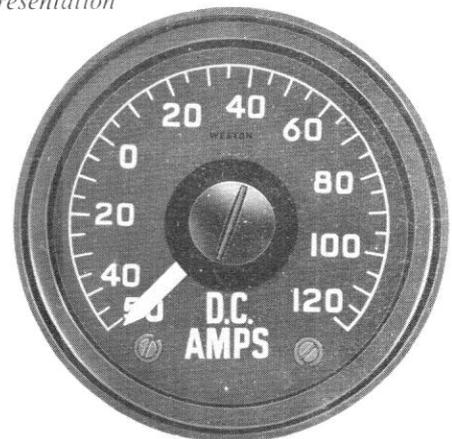

Model S 78 Form 3

Typical Presentation




D.C. VOLTMETERS

Of the same basic design as the ammeters already mentioned in this section self contained D.C. Voltmeters can be manufactured to cover any range from 50 millivolt to 300 volts.

Higher ranges may be accommodated when required by the addition of a small accessory box. Details of this are not given in this section but may be obtained on application.

Sensitivity of the moving coil permanent magnet movement used in the construction of d.c. voltmeters is 500 ohms per volt with the exception of short scale indicators which have a sensitivity of 200 ohms per volt. Models available as d.c. voltmeters are listed together with d.c. ammeters on pages 1/4 and 5. Due to the relatively low resistance of millivoltmeters it is essential that they be calibrated taking into account the external lead resistance which should be stated when ordering.

Voltmeters with suppressed zero characteristics may be made available and enquiries are invited for consideration.

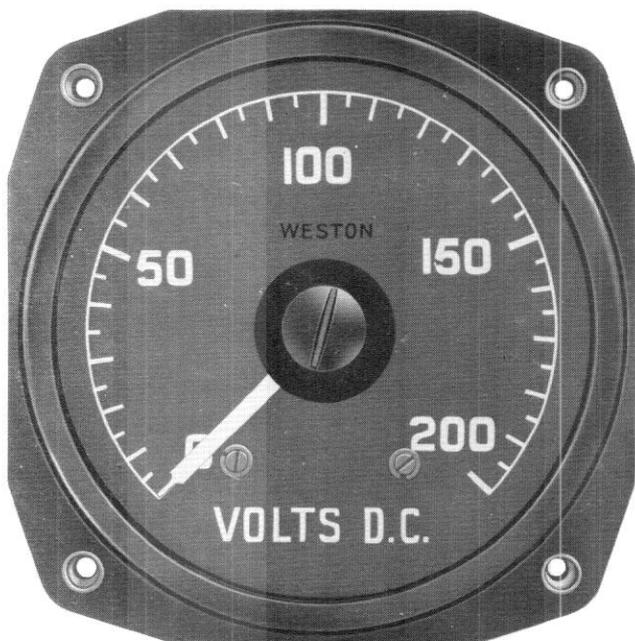

*Model S 78 Form 5
Typical Presentation*




*Model S 149 Form 2
Typical Presentation*

COMBINED D.C. VOLTMETERS AND AMMETERS

There are two basic types of combined D.C. Volt-ammeters. Continuous measurement of current and voltage can be indicated simultaneously by using a dual or multi-movement instrument. Each individual movement designed either as a voltmeter or ammeter. Several models can be used in this way, typical examples are models S216 - S128 - S175.

A single movement indicator calibrated for the measurement of voltage and current can be made available for certain applications. Readings of either voltage or current may be selected by switching the external circuit as shown in the theoretical circuit below.

It is important to use a high quality instrument switch such as the model S88 (section 20).

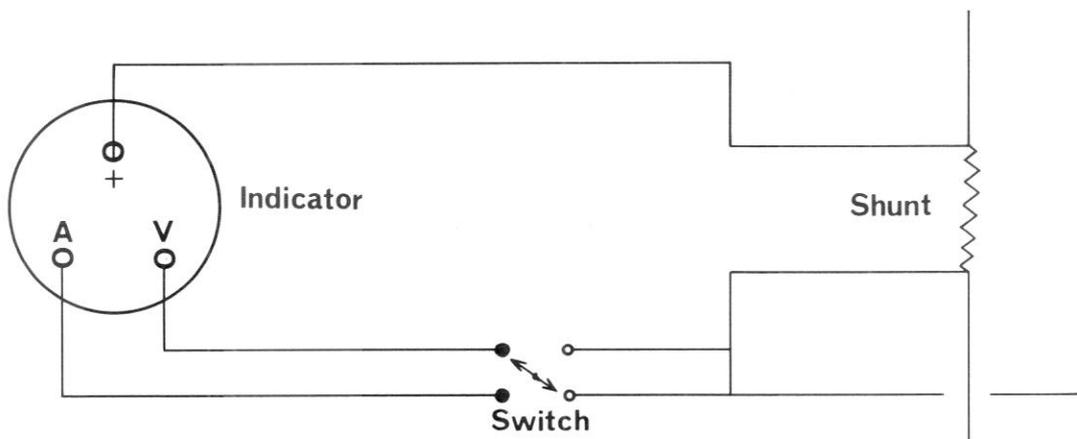

In such a system the leads from the shunt right back to the indicator must have a resistance of 0.5 ohm or some other known value previously agreed upon prior to manufacture. A limited number of ranges can be accepted depending upon the full-scale values. Current values and voltages must be multiples of each other in order to produce a dual purpose dial presentation.

A preferred model for this application is the model S231 details of which are given on page 1/5.

D.C. AMMETERS AND VOLTMETERS

| MODEL | FORM | DESCRIPTION | INST. DEPTH MAX. | NOMINAL SCALE ANGLE | SCALE LENGTH | ELECTRICAL CONNECTIONS | NORMAL ACC. OF FSD | APPROX WEIGHT | F.D. |
|-------|------|---|------------------|---------------------|-------------------|------------------------|--------------------|-----------------|------|
| S78 | 3 | Small S.A.E. shielded bakelite case | 2.54 in (64 mm) | 260° | 4.125 in (105 mm) | A3 B3 | ± 2% | 11.5 oz (326 g) | 692 |
| S78 | 4 | Small S.A.E. shielded bakelite case | 2.94 in (75 mm) | 260° | 4.125 in (105 mm) | A3 B3 | ± 2% | 12.5 oz (354 g) | 684 |
| S78 | 5 | Large S.A.E. shielded bakelite case | 3.575 in (93 mm) | 260° | 5.875 in (149 mm) | A3 B3 | ± 2% | 18 oz (510 g) | 777 |
| S104 | 3 | Small S.A.E. shielded bakelite case | 1.90 in (48 mm) | 90° | 1.6 in (41 mm) | A3 B3 | ± 2% | 7 oz (198 g) | 652 |
| S104 | 5 | Large S.A.E. shielded bakelite case | 3.18 in (82 mm) | 90° | 2.25 in (57 mm) | A3 B3 | ± 2% | 15 oz (425 g) | 775 |
| S128 | 5 | Dual Indicator, Large S.A.E. shielded bakelite case | 3.10 in (79 mm) | 100° | 1.75 in (44 mm) | A3 B3 | ± 2% | 21 oz (595 g) | 784 |
| S149 | 2 | 2 in dia. flangeless steel case (Sealed) | 3.90 in (99 mm) | 260° | 3.25 in (83 mm) | A3 B3 C3 | ± 2% | 11 oz (312 g) | 814 |
| S149 | 3 | 2 in dia. flangeless steel case (Sealed) | 3.08 in (78 mm) | 260° | 3.25 in (83 mm) | A3 B3 | ± 2% | 10 oz (283 g) | 1009 |
| S174 | 5 | 4 movements, Large S.A.E. shielded bakelite case | 3.18 in (82 mm) | 90° | 1.6 in (41 mm) | A3 B3 | ± 2% | 19 oz (539 g) | 892 |
| S175 | 8 | Dual Indicator, Large S.A.E. shielded bakelite case. | 3.735 in (95 mm) | 260° 245° | 3.25 in (83 mm) | A3 B3 | ± 2% | 19 oz (539 g) | 895 |
| S181 | 2 | 3 or 4 movement edgewise indicator 2.75 in (70 mm) x 4.625 in (118 mm) | 3.25 in (83 mm) | 52° | 1.3 in (33 mm) | A3 B3 | ± 3% | 17 oz (482 g) | 968 |

continued ...



D.C. AMMETERS AND VOLTMETERS (cont.)

| MODEL | FORM | DESCRIPTION | INST. DEPTH MAX. | NOMINAL SCALE ANGLE | SCALE LENGTH | ELECTRICAL CONNECTIONS | NORMAL ACC. OF FSD | APPROX WEIGHT | F.D. |
|-------|------|---|------------------|---------------------|--|------------------------|--------------------|-----------------|------|
| S214 | 2 | Triple movements in 2 in dia. steel sealed case | 4.09 in (104 mm) | 90° | 2 Mvts. 0.83 in (21 mm) 1 Mvt. 1.5 in (38 mm) | C8 C9 D1 E3 E4 | ±4% | 12 oz (340 g) | 993 |
| S216 | 2 | Dual movements in 2 in dia. steel sealed case | 3.93 in (100 mm) | 90° | 0.83 in (21 mm) | C6 C7 E2 | ±3% | 12 oz (340 g) | 972 |
| S230 | 3 | 2 in dia. flangeless steel case (sealed). Flag indicator in addition to main movement | 3 in (76 mm) | 180° | 2.3 in (59 mm) | A3 B3 | ±2% | 11 oz (312 g) | 1058 |
| S231 | 3 | Small S.A.E. shielded bakelite case. Alternative to S78.3 with improved scale linearity and accuracy | 2.54 in (39 mm) | 240° | 3.8 in (97 mm) | A3 B3 | ±1.5% | 11.5 oz (326 g) | 692 |
| S231 | 4 | Small S.A.E. shielded bakelite case. Alternative to S78.4 with improved scale linearity and accuracy. | 2.937 in (75 mm) | 240° | 3.8 in (97 mm) | A3 B3 | ±1.5% | 12.5 oz (354 g) | 684 |
| S231 | 5 | Large S.A.E. shielded bakelite case. Alternative to S78.5 with improved scale linearity and accuracy. | 3.3 in (84 mm) | 240° | 4.5 in (114 mm) | A3 B3 | ±1% | 20 oz (567 g) | 777 |
| S451 | 3 | Small S.A.E. shielded bakelite case with flange removed | 2.54 in (64 mm) | 260° | 4.125 in (105 mm) | A3 B3 | ±2% | 11.5 oz (326 g) | 1247 |
| S451 | 4 | Small S.A.E. shielded bakelite case with flange removed | 2.94 in (75 mm) | 260° | 4.125 in (105 mm) | A3 B3 | ±2% | 12.5 oz (354 g) | 1134 |
| S451 | 5 | Large S.A.E. shielded bakelite case with flange removed | 3.36 in (85 mm) | 260° | 5.875 in (149 mm) | A3 B3 | ±2% | 16.5 oz (468 g) | 1190 |
| S454 | 2 | 2 in dia. flangeless steel case (short scale angle) | 3.9 in (99 mm) | 90° | 1.3 in (33 mm) | A3 B3 | ±3% | 11 oz (312 g) | 1164 |
| S458 | 2 | 2 in dia. flangeless steel case. Alternative to S149.2 with improved scale linearity and accuracy | 3.9 in (99 mm) | 240° | 3 in (76 mm) | A3 B3 | ±1.5% | 11 oz (312 g) | 814 |
| S458 | 3 | 2 in dia. flangeless steel case. Alternative to S149.3 with improved scale linearity and accuracy | 3.08 in (78 mm) | 240° | 3 in (76 mm) | A3 B3 | ±1.5% | 10 oz (283 g) | 1009 |

continued . . .



D.C. AMMETERS AND VOLTMETERS (cont.)

| MODEL | FORM | DESCRIPTION | CASE DEPTH | NOMINAL SCALE ANGLE | SCALE LENGTH | ELECTRICAL CONNECTIONS | NORMAL ACC. OF FSD | APPROX WEIGHT | F.D. |
|-------|------|---|------------------|---------------------|------------------|------------------------|--------------------|-----------------|------|
| S460 | 4 | Small S.A.E. shielded bakelite case with flange removed. Alternative to S451.4 with improved scale linearity and accuracy | 2.937 in (75 mm) | 240° | 3.8 in (97 mm) | A3 B3 | ±1.5% | 11.5 oz (326 g) | 1134 |
| S460 | 5 | Large S.A.E. shielded bakelite case with flange removed. Alternative to S451.5 with improved scale linearity and accuracy | 3.36 in (85 mm) | 240° | 4.5 in (114 mm) | A3 B3 | ±1% | 19 oz (539 g) | 1190 |
| S478 | 5 | Dual movement indicator. Large S.A.E. shielded bakelite case with flange removed | 3.36 in (85 mm) | 100° | 1.75 in (44 mm) | A3 B3 | ±2% | 19 oz (539 g) | 1190 |
| S482 | 5 | Large S.A.E. shielded bakelite case with flange removed. Fitted with additional flag indicator | 3.36 in (85 mm) | 240° | 4.64 in (117 mm) | A3 B3 | ±2% | 18 oz (510 g) | 1190 |
| S483 | 2 | 2" Square front steel case with integral lighting. | 4.51 in (115 mm) | 240° | 3.3 in (84 mm) | A6 B4 C7 | ± 1½% | 20 oz (566 g) | 1374 |
| S484 | 2 | 2" Square front steel case with integral lighting. Dual | 4.51 in (115 mm) | 240° | 0.9 in (23 mm) | A6 B4 C12 | ± 3% | 16 oz (454 g) | 1374 |
| S487 | 3 | Small S.A.E. case with flange removed | 1.9 in (48 mm) | 90° | 1.6 in (41 mm) | A3 B3 | ±2% | 6.75 oz (510 g) | 1247 |
| S487 | 5 | Large S.A.E. case with flange removed | 3.175 in (80 mm) | 90° | 2.25 in (57 mm) | A3 B3 | ±2% | 14.5 oz (420 g) | 1190 |
| S497 | 6 | Large S.A.E. shielded bakelite case fitted with additional flag indicator. | 3.36 in (85 mm) | 240° | 4.65 in (117 mm) | A3 B3 | ±2% | 18 oz (510 g) | 778 |



PREFERRED RANGES

All Screw Terminals and fixing nuts have unified threads. Dials are Black and have White figures and markings. The following pointers are fitted as standard:-

White Lance, Narrow Tip - Model S78

White Lance - Models S149, S231 & S458

Electrical connections are coded in the following manner:- 'A' or '1' negative, 'B' or '2' positive.

D.C. AMMETERS

F.S.D. = 50mV. For use with external shunts, lead resistance 0.5 ohm.

| RANGE AMPS | 2 in DIA. 6 U.N.C. SCREW TERMINALS | 2 in DIA. 6 U.N.C. SCREW TERMINALS | SMALL S.A.E. SCREW TERMINALS | SMALL S.A.E. SCREW TERMINALS | LARGE S.A.E. SCREW TERMINALS | LARGE S.A.E. SCREW TERMINALS |
|---------------|---|---|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| 0-60 | S149.3.335 | S458.3.27 | S78.3.1164 | S231.3.63 | S78.5.1168 | S231.5.68 |
| 0-100 | S149.3.217 | S458.3.28 | S78.3.1165 | S231.3.64 | S78.5.1169 | S231.5.69 |
| 0-200 | S149.3.336 | S458.3.29 | S78.3.1166 | S231.3.65 | S78.5.1170 | S231.5.70 |
| 0-300 | S149.3.295 | S458.3.30 | S78.3.1188 | S231.3.66 | S78.5.1189 | S231.5.71 |
| 0-500 | S149.3.337 | S458.3.31 | S78.3.1167 | S231.3.67 | S78.5.1171 | S231.5.72 |

D.C. VOLTMETERS

| RANGE VOLTS | 2 in DIA. SEALED 3 PIN PLUG | 2 in DIA. SEALED 3 PIN PLUG | 2 in DIA. 6 U.N.C. SCREW TERMINALS | 2 in DIA. 6 U.N.C. SCREW TERMINALS | S SMALL S.A.E. SCREW TERMINALS | SMALL S.A.E. SCREW TERMINALS | LARGE S.A.E. SCREW TERMINALS | LARGE S.A.E. SCREW TERMINALS |
|----------------|--------------------------------------|--------------------------------------|---|---|---|---------------------------------------|---------------------------------------|---------------------------------------|
| 0-35 | S149.2.87 | S458.2.32 | S149.3.326 | S458.3.25 | S78.3.1154 | S231.3.61 | S78.5.1156 | S231.5.74 |
| 0-150 | S149.2.328 | S458.2.33 | S149.3.327 | S458.3.26 | S78.3.1155 | S231.3.62 | S78.5.1157 | S231.5.75 |

