Chapter 2

AIRFRAME SIMULATOR (ROCKET PACK) TEST BOX

LIST OF CONTENTS

		LILLY I	OI .	CONTENIS					
		Pa	ra.					Pa	ıra.
Introduction			1	Container					3
Description				Components					4
General			2	Servicing					5
		LIST	г оғ	TABLES					
		Та	ble					Ta	ible
Schedule of components	••••		1	Connector de	rtails	4	7 K B - F		2.
	\mathbf{L}^{1}	IST OF	ILI	USTRATIONS					
		I	īg.					I	Fig.
Test box (general view) Front panel layout			1 2	Test circuit a	liagram				3
	I	EADIN	G P.	ARTICULARS					
Airframe sii	nulator tes	t box		****	Ref.	No.	1		
Dimensions					J		•		
Length	• • • •					15.2	25 in.		
Width							8 in.		

Introduction

1. The Airframe Simulator (Rocket Pack) Test Box provides facilities for ground testing the 2 in. Rocket Pack (A.P.2802A, Vol. 1, Parts 1 and 3). Operating instructions are included in A.P.4700 A & F, Vol. 1, Book 2, Sect. 6, Chap. 2.

Height

Weight

Input voltage

DESCRIPTION

General

2. The test box comprises, a container with a detachable front panel which carries the switches and indicator lamps, and extension cables which pass through the container for

joining the test circuit wiring to the rocket pack connectors.

9 in.

14.75 lb.

.... 24-28 d.c.

Container

3. The container is a rectangular box of light-gauge pressed steel, with ventilating louvres in the rear and sides panels. The front panel is secured to the container by countersunk screws and handles are provided to facilitate its removal. Two carrying handles are fitted on the side panels.

Components

4. The front panel carries three indicator

RESTRICTED

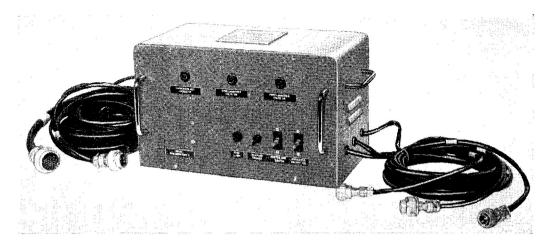


Fig. 1. Test box (general view)

lamps, with clear, green, and red caps, three test switches, a fuse holder, and a Type 2 relay mounted on the back. Identification labels are fitted below the components and are shown in fig. 2. Two heavy-duty terminals are provided at the rear of the container for connecting a 28-volt d.c. supply

to the test circuit. The extension cables, each ten feet in length, are fitted with free plugs or sockets, which mate with the pack connectors. A schedule of components is given in Table 1, and details of the test circuit wiring and extension cables are shown on fig. 3.

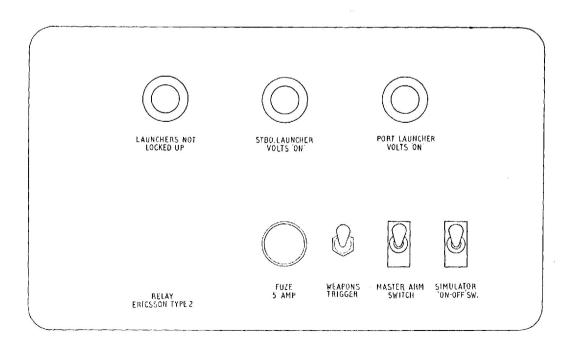


Fig. 2. Front panel layout


RESTRICTED

Table 1
Schedule of components

Item	Description	Type or Ref. No.	Quantity	
Container		1053A	1	
Fuse holder	Standard	L356	1	
Fuse link	Glass, 5A	L1055	1	
Switch	S.P., ON-OFF	8295/B110	1	
	(spring ret. to OFF)	•		
Switch	S.P., ON-OFF	XD736	2	
Relay	·	Type 2	1,	
Indicator lamp		D620	1 3 1	
Lamp cap	Clear	D149	1	
,, ,,	Green	D149	1	
,, ,,	Red	D149	1	
Lamp fillament	24V	P.O. No. 2	3.	
Terminal	Red	L1005	1	
**	Black	L1005	1	
Lug connector	6-amp	5X/6815	5	
Ring tongue tag	6-amp	HX294	4	
Cable	Unipren	6 amp		
Socket	Free coupler	CZ56262	1	
Socket	Free coupler	CZ56265	1	
Socket	Free coupler	CZ56257	1	
Plug	Free coupler	CZ49261	2	
Grommet	Rubber	HV2215	4	
Grommet	Rubber	HV2412	1	

Table 2
Connector details

Identi	fication	Length-ft	Termination	Ways
F	RP1	10	25-pole SK.	8
F	RP3	10	4-pole SK.	2
F	P4	10	3-pole SK.	2
F	RP5	10	2-pole PL.	2
F	P8	10	2-pole PL.	2

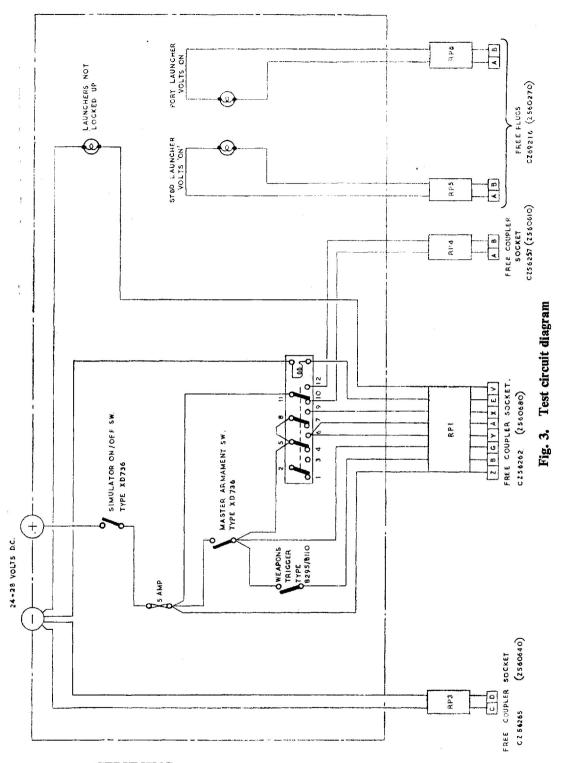

SERVICING

5. The unit should be examined periodically for damage and deterioration of the cables. Ensure that the cables are free from

grease and oil. The continuity of the internal wiring and cable cores should be checked and the indicator lamps tested.