


ENGINE CONTROLS — FRONT FUSELAGE

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Score	Place No.
	C.202267	ENGINE CONTROLS IN FRONT FUSELAGE	—	—		
	C.188849	ASSEMBLY	—	—		
	913 F.188852	BOX, CONTROL, L.P. COCK, ASSEMBLY	3	S.1	C.	DB.1
	917 A.188851	Bolt, special	1	DTD.610	C.	DB.1
31	27K/4611240	Plate, side	1	—	A.	
		Unit, lever box	1	—		
	6234 D.205555	Box, control throttle, group	1	—	A.	DB.1
	C.205556	Box, throttle, control	1	—		
—	B.192435	Cable, GS; 15, group (See Cable Chart)	1	—	—	
—	B.205590	Cable, F.53, group (See Cable Chart)	1	—	—	
—	B.205488	Cable, F.37, group (See Cable Chart)	1	—	—	
	11454 F.216043	Clamp, securing cables	2	LFS, or A.100/M		DB.1
	1893 F.174585	Eye-bolt, switch adjusting	1	S.1	C.	DB.1
	6235 F.205563	Eye-end, for locking plunger	1	S.94.B	C.	DB.1
	2142 Std.532/7	Ferrule	2	S.80	C.	4
	10155 A.205559	Fitting, hinge, for locking lever	1	Casting	C.	
	1894 F.176105	Handle, throttle damping, group	1	—	C.	DB.1
	F.167986	Rod	1	S.95.B		
	1895 F.167984	Spring	1	Spr. Stil.	C.	DB.1
31	1896 F.167988	Lever	1	L.168	C.	DB.1
31	1897 A.167991	Lever, damper, group	1	S.510	C.	DB.1
31	F.202292	Lever, switch, operating	1	S.510 & T.26		
	6236 B.205557	Lever, throttle control, group	1	—	B.	DB.1
	F.152086	Bush	2	B.55 or N.69		
	10774 Std.608/2	Bush	1	B.8 or DTD.78A	C.	4
	6237 F.205564	Lever, locking	1	Casting	C.	DB.1
	A.205164	Plate, cover	1	BSS.265		
	1900 F.195880	Plate, support, micro switch	1	S.3	C.	DB.1
	1901 F.195881	Plate, support, micro switch	1	S.3	C.	DB.1
	6238 F.205561	Plunger, locking	1	S.94.B	C.	DB.1
	F.174662	Shift	1	T.6		
	A.205560	Slide, for plunger	1	Casting		
	6239 F.205562	Spring	1	DTD.215	C.	DB.1
	6240 F.205167	Stop, adjustable	1	Casting	C.	DB.1
	5F/9454141 NY.18007A	Strapping	9"	—	C.	
	5F/9138822 NY.3342	Stud	2	—	C.	
	5CW/9438275 Burgess)	Switch, micro, type 1A	1	—	B.	
31	1124465 Pye)					
	3791 Std.1509/2/026	Tube, distance (Make from 30B/9611260)	1	T.4	MR/C	4
	3792 Std.1509/23/025	Tube, distance (Make from 30B/9611262)	1	T.4	MR/C	4
	3793 Std.1509/23/045	Tube, distance (Make from 30B/9611262)	1	—	MR/C	4
31	4506222 —	Unit, control, Type T.1, Mk. 2A (AS.920/64)	1	—	A.	
31	Std.914/J24	Washer, rubbing	2	S.1 or S.510		4
	6241 F.205168	Washer, serrated	1	Casting	C.	DB.1
	10600 F.243996	Washer, slotted (may be made from SP.16A)	1	L.72	C.	
		(AS.920/51)				

ENGINE CONTROLS — FRONT FUSELAGE

Hunter F. Mk. 6
Issued with A/L No. 31

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Store	Place No.
31	6242 A.202343	Bracket, swivel support	1	S.510 or T.26	C.	DB.1
31	27K/4611194 Teleflex C.36706/B	Break unit	2	—	C.	
31	27K/4611196 Teleflex C.36424	Cable and break rod, assembly	2	—	C.	
	919 F.189942	Clamp, at frame 13, 15 and 16	5	LFS.21	C.	DB.1
	5801 F.206523	Clamp, at frame 13	2	LFS.21	C.	DB.1
	1702 F.193858	Clamp, at frame 12	1	LFS.21	C.	DB.1
	1703 F.193859	Clamp, at frame 12	1	LFS.21	C.	DB.1
	3734 Std.840—14	Clip, for earthing connector	2	DTD.610	MR/C	4
	11303 Std.2046/17/26	Clip, sleeved (AS.760/74)	2	S.510 or S.511	C.	6
31	27K/1034953 Teleflex A.35336	Collar	11	—	C.	
31	27K/4611060 Teleflex D.S.307/2	Conduit (for lengths see Hawker drawings B.189945, 48, 49, 51 and A.205979-80)	QR	—	C.	
31	27K/4676684 Teleflex B.35375/B	Connector, bulkhead	2	—	C.	
31	27K/4611069 Teleflex B.35340/B	Connector, conduit	2	—	C.	
	Std.1285/3/BC	Connector, earthing	1	—		4
	920 F.175409	Fork-end	1	S.1	C.	DB.1
31	1940 Std.1231/1	Lug, locking, for swivel at frame 10	1	S.510	C.	4
	373 Std.1221/Y/D50	Pin	1	H.T.S.	C.	4
	F.211034	Plate, blanking on frame 14	1	—		
31	27K/1034951 Teleflex A.35335	Sleeve, outer	11	—	C.	
31	27K/8006863 Teleflex A.24242	Sleeve, nut	1	—	C.	
	— Teleflex C.36247	Sliding, screwed end (L.M. from 27K/1230)	1	—	—	
	27K/ Teleflex C.28166/C	Swivel, spring loaded	1	—	C.	
	5802 F.206557	Support, for conduit	2	LFS.21	C.	DB.1

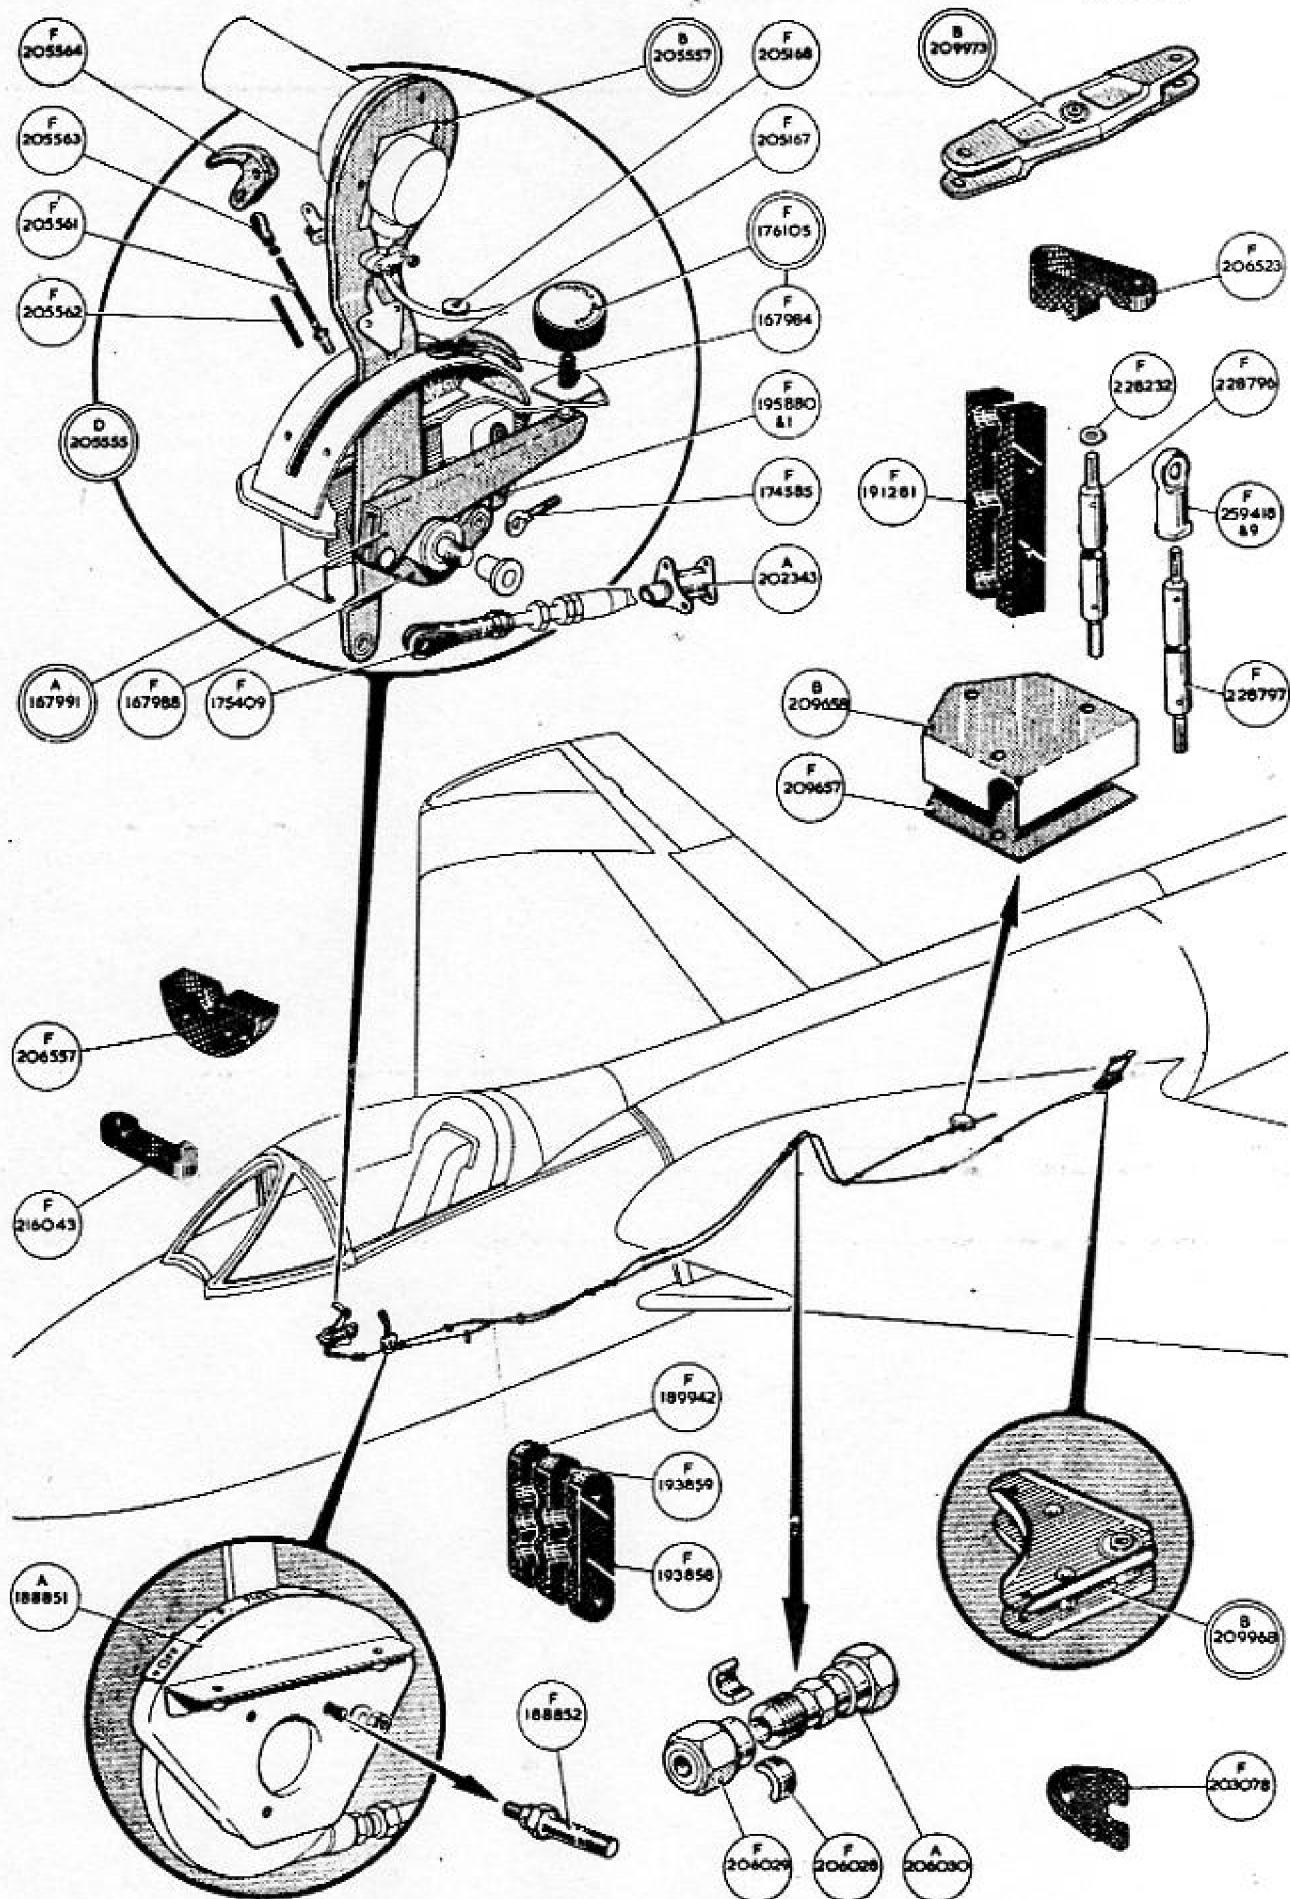

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

