


POWER INSTALLATION—GEARBOX AND ACCESSORIES

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Store	Plate No.
		1 2 3 4 5				
	E.204660	ACCESSORY DRIVE FOR GEARBOX AND EQUIPMENT, ASSEMBLY	—	—		
37L/322	—	Arm, drive, type G.A.7/2 (Mod. 702)	1	—	A.	
6391	F.194529	Bolt, special, for generator attachment	4	S.99.B	C.	LB.1
6392	F.194530	Bolt, special, for generator attachment	2	S.99.B	C.	LB.1
6393	F.200766	Bolt, "U", for safety bracket at frame 34	1	S.1	C.	LB.1
6394	B.203089	Box, sealing, for drive shaft	1	—	B.	LB.1
6395	F.188685	Channel, stop, for safety bracket "U" bolt at frame 34	1	DTD.610	C.	LB.1
11303	Std.2046/17/26	Clip, sleeved	1	S.510 or S.511	C.	6
37L/196	—	Gearbox, type TG.5/5, group	1	—	A.	
37L/2940	Rotoi G. 16095	Washer, for dipstick	1	—	C.	
31 5UA/435724	—	Generator, type 517	2	—	A.	
	C.212052	GENERATOR COOLING AIR OUTLET, ASSEMBLY (MOD. 425)	—	—		
31 8342	C.212054	Cover, bottom	1	S.510	B.	LB.1
31 8343	B.212053	Cover, top	1	S.510	B.	LB.1
8346	F.212146	Eye-bolt, securing covers	2	S.1	C.	LB.1
31 8344	B.212055	Strap, inboard generator	1	S.510	B.	LB.1
31 8345	B.212056	Strap, outboard generator	1	S.510	B.	LB.1
8347	F.217098	Washer, profile at strap	4	L.72	C.	LB.1
2192	Std.915/C14	Washer, for eyebolt pin	1	DTD.610	C.	4
—	Std.1306/D/20	Hose, 1-1/4" i/d x 2" long (Make from 32C/455)	2	DTD.625A	—	4
	A.226908	Piece, packing, for drive arm (Mod. 702)	1	L.72		LB.1
31 7171†	F.205196	Pipe, breather, for generator	1	DTD.253	MR/C	LB.1
31 7172†	F.205159	Pipe, breather, for drive arm (Pre Mod. 751)	1	DTD.253	MR/C	
9944	F.230731	Pipe, vent (Mod. 751)	1	—	C.	LB.1
31 7173†	F.206188	Pipe, drain, for drive arm	1	DTD.253	MR/C	LB.1
31 7174†	F.213362	Pipe, drain, for oil filler	1	DTD.253	MR/C	LB.1
6398	A.204659	Plate, sealing, for oil filler	2	LFS.21	C.	LB.1
31 37J/4602111	Dowty	Pump, "Vardel", type A8003Y/RH/3000	1	—	A.	
37L/371	—	Shaft, drive, type GD.9/33 (Pre Mod. 733)	1	—	A.	
37L/372	—	Shaft, drive, type GD.9/33 (Pre Mod. 733)	1	—	A.	
37L/325	—	Shaft, drive, type GD.3.100 (Mod. 733)	1	—	A.	
37L/369	—	Shaft, drive, type GD.9/37	1	—	A.	
6396	B.205290	Spout, inlet cooling, for outboard generator	1	L54 & L.59	C.	LB.1
6397	B.205291	Spout, inlet cooling, for inboard generator	1	L.54 & L.59	C.	LB.1
7175	Std.1509/23/028	Tube, distance, for oil filler sealing plate	6	T.4	MR/C	4
7176	Std.1509/23/052	Tube, distance, for safety bracket "U" bolt	2	T.4	MR/C	4
26VA/6034610	Std.1509/23/060	Tube distance, for clipping of pipe drain	1	T.4	C.	4

† For details see Piping Chart.

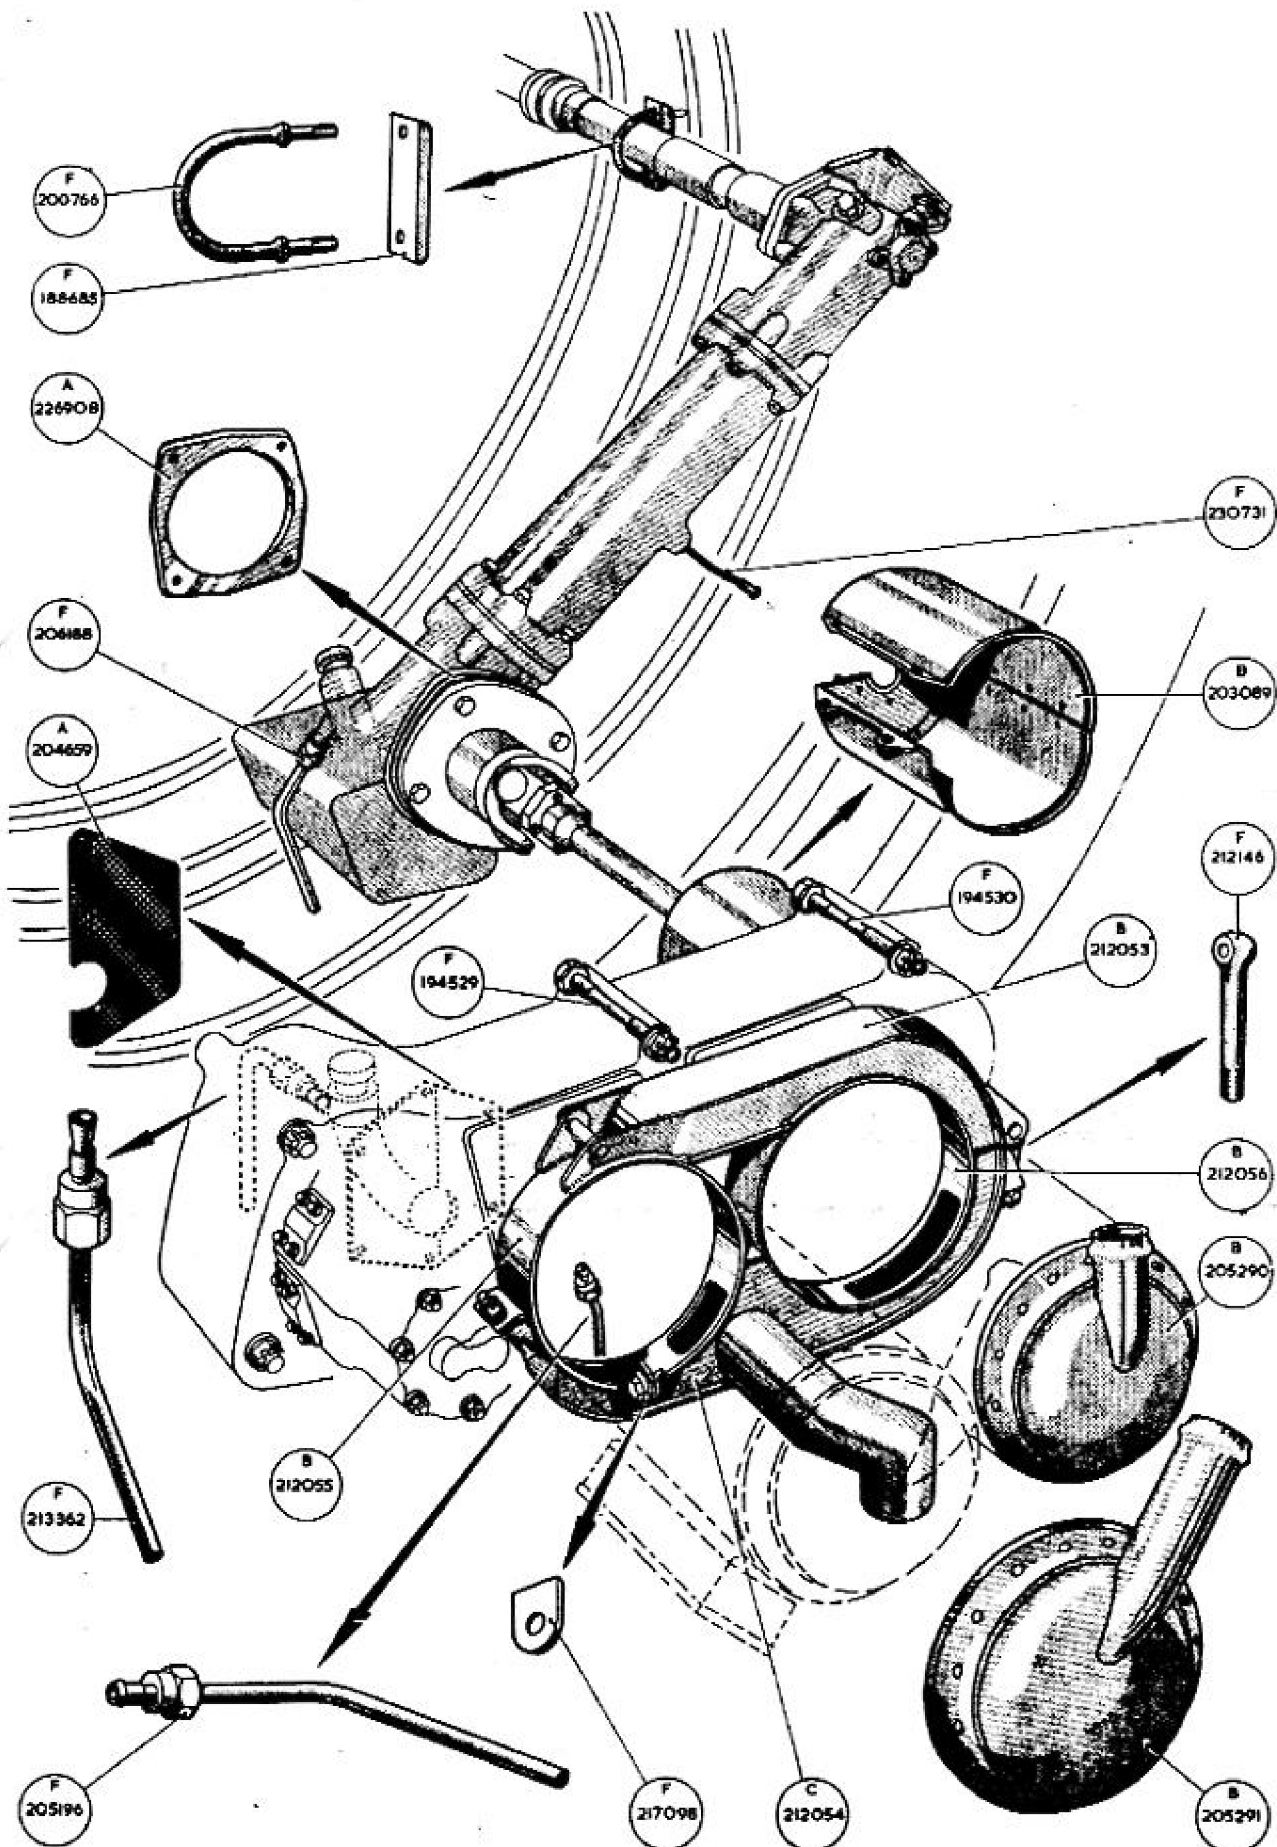

This file was downloaded
from the RTFM Library.
Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

