


SERVICES - PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Score	Place No.
		1 2 3 4 5				
	D.190124	PILOT'S ANTI "G" INSTALLATION,.....	-	-		
		ASSEMBLY				
861	F.188884	Angle, mounting, anti "G" valve	1	DTD.610	C.	NK.1
862	F.188882	Angle, mounting, anti "G" valve	1	DTD.610	C.	NK.1
863	F.190229	Bolt, special, connecting air bottle straps	2	S.95.B	C.	NK.1
447	F.186436	Bolt, special, strap clamping	2	S.95.B	C.	NK.1
27VA/4619941	Dunlop	Bottle, air, spherical	2	-	A.	
	ACM.16782					
864	F.190220	Clip, mounting, reducing valve	1	S.510	C.	NK.1
865	Std.1178/3	Clip, mounting, reducing valve	1	S.510 & T.26	C.	4
26VA/6039070	Std.2045/29/22	Clip, sleeved	2	S.510 or	C.	6
				S.511		
26VA/6042337	Std.2046/29/22	Clip, sleeved	1	S.510 or	C.	6
				S.511		
26VA/6044412	Std.2045/17/26	Clip, sleeved	1	S.511	C.	6
4667	Std.850/28	Clip, securing pipes, 7/16" wide x 22 S.W.G. x	2	DTD.610	C.	4
		2.8" long				
33	3774	Coupling, flexible, 5/8" i/d x 2.0" long	4	DTD.625A	MR/C	4
		(Make from 32C/1275067)				
33	4276	Coupling, flexible, 5/8" i/d x 3.8" long	1	DTD.625A	MR/C	4
		(Make from 32C/1275067)				
1707	A.193653	Elbow, at cockpit shelf side wall	1	L.54 or T.9	C.	
27VA/9006816	Dunlop ACO.7273	Filter	1	-	A.	
6A/4333066	-	Gauge, pressure, Mk. 14.KK	1	-	A.	
2851	Dunlop	Hose, leak proof, 5/8" i/d x 12-1/8" long	1	-	C.	
	DAS/412/E/12.5	(D.190124/1)				
6A/1037413	-	Label, air	1	-	C.	
†	A.190201/1	Pipe, 4-way piece to non-return valve	1	DTD.323		
†	A.190201/2	Pipe, non-return valve to air bottle	1	DTD.323		
†	A.190201/3	Pipe, air bottle to air bottle	1	DTD.323		
†	A.190201/4	Pipe, air bottle to filter	1	DTD.323		
1948	A.190201/5	Pipe, filter to tee-piece	1	DTD.323	C.	
†	A.190201/6	Pipe, tee-piece to selector valve	1	DTD.323		
†	A.190201/7	Pipe, selector to reducing valve	1	DTD.323		
†	A.190201/8	Pipe, tee-piece to gauge	1	DTD.323		
3591	A.193654/1	Pipe, anti "G" valve to connection	1	L.54 & T.9	C.	
†	A.193654/2	Pipe, connection	1	L.54 & T.9		
†	A.193654/3	Pipe, connection to elbow	1	L.54 & T.9		
3839	Std.1606/44/816	Screw, securing elbow, 4 B.A. x 1/2" long	3	Brass	C.	5
1720	Std.1606/44/824	Screw, securing pressure gauge	4	-	C.	5
866	F.189989	Strap	2	DTD.166	C.	NK.1
27VA/2224239	Dunlop ACO.6580	Socket, quick release	1	-	A.	
867	F.189991	Strap, air bottle	4	DTD.166	C.	NK.1
868	F.190003	Strap, air bottle	2	DTD.166	C.	NK.1
3787	Std.1507/23/035	Tube, distance, 5/16" o/d x 17 S.W.G. x .35" long	2	T.26	MR/C	4
		(Make from 30A/9610295)				
3808	Std.1509/23/040	Tube, distance, 3/8" o/d x 17 S.W.G. x .4" long	2	T.4	MR/C	4
3802	Std.1509/23/085	Tube, distance, for clip securing pipe, 3/8" o/d x	1	T.4	MR/C	4
		17 S.W.G. x .85" long				
		† For details see Piping Chart				

SERVICES—PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description					No. On	Material Specification	M.R. Class of Store	Place No.
		1	2	3	4	5				
	869	F.140778	Union, reducing				1	L.1	C.	NF.1
31	27VB/4495776	Hymatic AG.2	Valve, anti "G"				1	—	A.	
31	27Q/4117446	Dowty D.5213Y	Valve, non-return				1	—	A.	
31	27VC/4607575	Palmer C.58	Valve, reducing				1	—	A.	
31	27VB/4497626	Hymatic SV.9	Valve, selector				1	—	A.	
	870	Std.915/B/18	Washer				6	DTD.610	C.	4

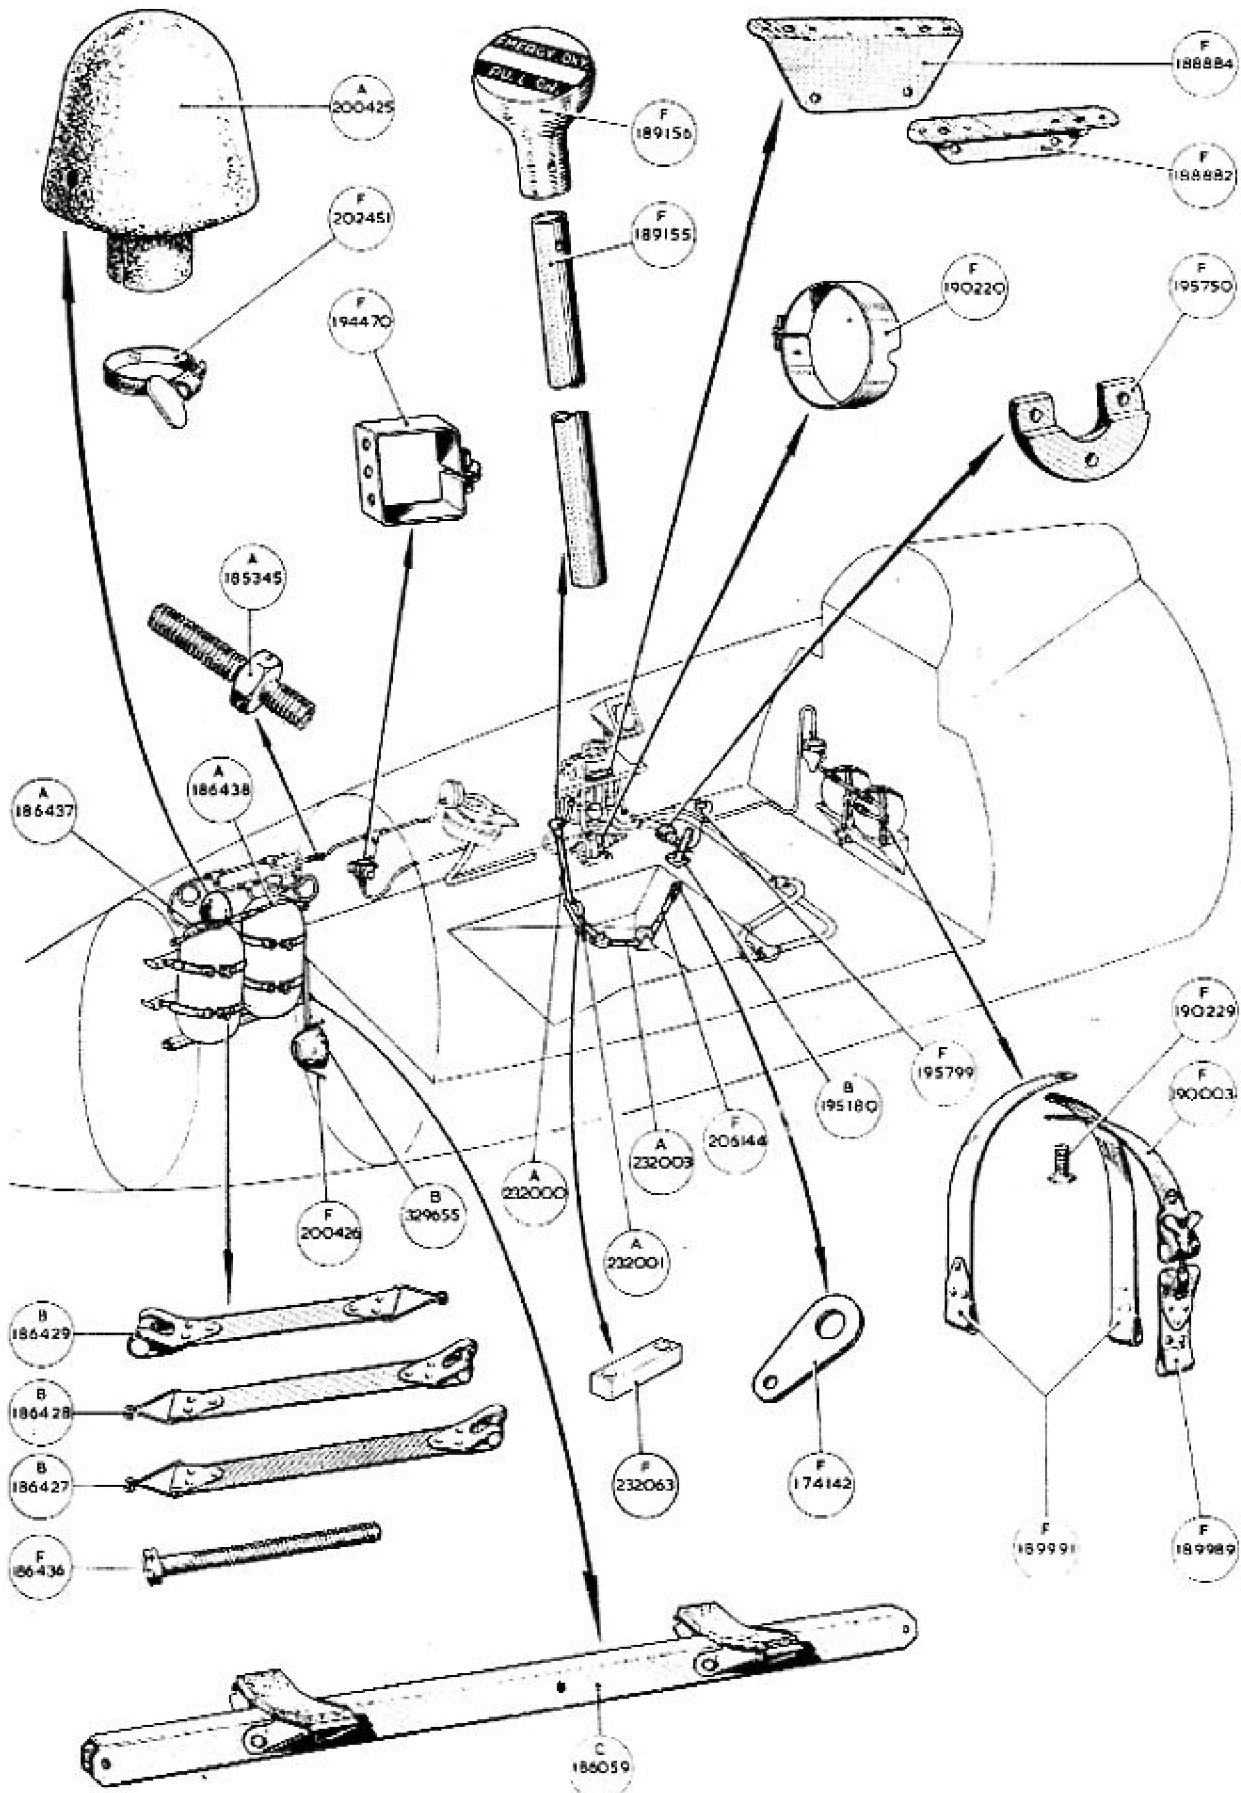

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

