


SERVICES - PILOTS ANTI "G" INSTALLATION

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Store	Plate No.
		PILOTS ANTI "G" INSTALLATION, ASSEMBLY	-	-		
	3901 E.212575	Block, clamp	4	LFS.21	C.	
	5145 F.194724	Block, clamp	2	LFS.21	C.	NK.1
	863 F.190229	Bolt, air bottle strap connection	4	S.95.B	C.	NK.1
	447 F.186436	Bolt, air bottle strap connection	4	S.95.B	C.	NK.1
23	27VA/4619941 Dunlop	Bottle, airspherical, 1/8" B.S.P.	4	-	A.	NK.1
	ACM.16782					
	9805 F.231015	Cleat, top, for pipe guard	2	LFS.21	C.	NK.1
	9806 F.231016	Cleat, bottom, for pipe guard	2	LFS.21	C.	NK.1
	864 F.190220	Clip, mounting, for reducing valve	1	S.3	C.	NK.1
	26VA/6039070 Std.2045/29/22	Clip, sleeved	4	S.510 or S.511	C.	
	11303 Std.2046/17/26	Clip, sleeved	2	S.510 or S.511	C.	
	26VA/6042337 Std.2046/29/22	Clip, sleeved	1	S.510 or S.511	C.	
	865 Std.1178/3	Clip, mounting, for reducing valve	1	S.3 & T.26	C.	4
	3774 Std.1306/N/20	Coupling, flexible, 5/8" i/d x 2" long, at anti "G" valve connection (Make from 32C/450)	5	DTD.625A	MR/C	4
	- Std.1306/N/45	Coupling, flexible, 5/8" i/d x 4.5" long, at anti "G" valve connection (Make from 32C/450)	1	DTD.625A	-	
23	27VA/9006816 Dunlop	Fiber	1	-	A.	NK.1
	ACO.7273					
23	6A/4333066 -	Guard, pressure, Mk. 14, K.K.	1	-	A.	
	B.231017	Guard, pipe	1	L.72		
	B.231018	Guard, pipe	1	L.72		
	8958 Dunlop	Hose, kink proof, 5/8" i/d x 3" long, port	1	-	C.	
	DAS.412E/3.0"					
	9868 Dunlop	Hose, kink proof, 5/8" i/d x 5.50" long, starboard	1	-	C.	
	DAS.412E/5.5"					
23	6A/1037413 -	Label, at fuselage gauge (AS.790/65)	1	-	C.	
	C.212224	Panel, control, group	1	-		
	F.213082	Block, locating handle	1	LFS.21		
	C.212079	Bracket, mounting	1	L.72		
	C.212080	Bracket, mounting	1	L.72		
	8959 F.212096	Clamp, half, supporting reducing valve	2	L.65.C	C.	
	8960 F.212097	Clamp, half, supporting reducing valve	1	L.65.C	C.	
	8961 F.212098	Clamp, half, supporting reducing valve	1	L.65.C	C.	
	3774 Std.1306/N/20	Coupling, flexible, 5/8" i/d x 2" long, at anti "G" valve connection (Make from 32C/450)	1	DTD.625A	MR/C	4
	A.213080	Handle, control	1	-		
	F.213083	Lever	1	T.26 & S.3		
	† A.212660/7	Pipe, valve selector to valve reducing	1	DTD.323		NK.1
	B.212089	Plate, top	1	L.72		
	F.213100	Stop, cable	1	S.3		
23	27VC/4607579 Palmer C.58.B	Valve, reducing	1	-	A.	
23	27VB/4497626 Hymatic S.V.9	Valve, selector	1	-	A.	
23	27VB/4495776 Hymatic A.C.2	Valve, anti "G"	1	-	A.	
	10276 A.212659/1	Pipe, anti "G" valve to joint, port	1	L.56	C.	NK.1
	10807 A.212659/2	Pipe, anti "G" valve to joint, starboard	1	L.56	C.	NK.1
	10707 A.212659/8	Pipe, joint to joint, starboard	1	L.56	C.	NK.1
	10808 A.212659/10	Pipe, joint to hose, port	1	DTD.323 or DTD.253	C.	NK.1
	9820 A.212659/11	Pipe, joint to hose, starboard	1	DTD.323 or DTD.253	C.	NK.1

† For details see Piping Chart

SERVICES - PILOTS ANTI "G" INSTALLATION

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
†	A.212660/1	Pipe, 4-way piece to non-return valve					1	DTD.323		NK.1
†	A.212660/2	Pipe, non-return valve to air bottle					1	DTD.323		NK.1
†	A.212660/4	Pipe, bottle to filter					1	DTD.323		NK.1
†	A.212660/5	Pipe, filter to union					1	DTD.323		NK.1
†	A.212660/6	Pipe, union to valve selector					1	DTD.323		NK.1
†	A.212660/8	Pipe, valve reducing to union					1	DTD.323		-
†	A.212660/13	Pipe, bottle to bottle					3	DTD.323		NK.1
†	A.212660/9	Pipe, union to union					1	DTD.323		NK.1
†	A.212660/10	Pipe, union to tee piece					1	DTD.323		NK.1
†	A.212660/11	Pipe, tee piece to valve reducing					1	DTD.323		NK.1
†	A.212660/12	Pipe, tee piece to pressure gauge					1	DTD.323		NK.1
4179	Std.1606/44/B.20	Screw, securing pressure gauge					4	Brass	C.	5
		(Alt. to Std.2095/209/B20)								
	Std.2095/209/B.20	Screw (Alt. to 26FX/4179)					4	-		
8962	F.216131	Shackle					4	-	C.	NK.1
23 27VA/2224239	Dunlop ACO.6580	Socket, quick release, 5/8" dia.					2	-	C.	
1476	F.189990	Strap, air bottle					8	DTD.166	C.	NK.1
8963	F.216130	Strap, air bottle					4	DTD.166	C.	NK.1
3787	Std.1507/23/035	Tube, distance, for reducing valve mounting, 5/16" o/d x 17 S.W.G. x .35" long					2	T.26	MR/C	4
	Std.1507/23/050	Tube, distance, 3/8" o/d x 17 S.W.G. x 0.50" long					1	T.4		
	Std.1507/23/070	Tube, distance, 3/8" o/d x 17 S.W.G. x 0.70" long					1	T.4		
26VA/6039011	Std.1509/23/020	Tube, distance, 3/8" o/d x 17 S.W.G. x 0.20" long					1	T.4	C.	
26VA/6034610	Std.1509/23/060	Tube, distance, 3/8" o/d x 17 S.W.G. x 0.60" long					4	T.4	C.	
869	F.140778	Union, reducing					1	L.1	C.	NK.1
23 27Q/4117446	Dowty D.5213.Y	Valve, non-return					1	-	B.	
23 27VC/4607575	Palmer C.58	Valve, reducing					1	-	A.	
23 27VB/4495776	Hymatic AC.2	Valve, anti "G"					1	-	A.	
870	Std.915/B/18	Washer, at air bottle securing strap					12	DTD.610	C.	4
† For details see Piping Chart										

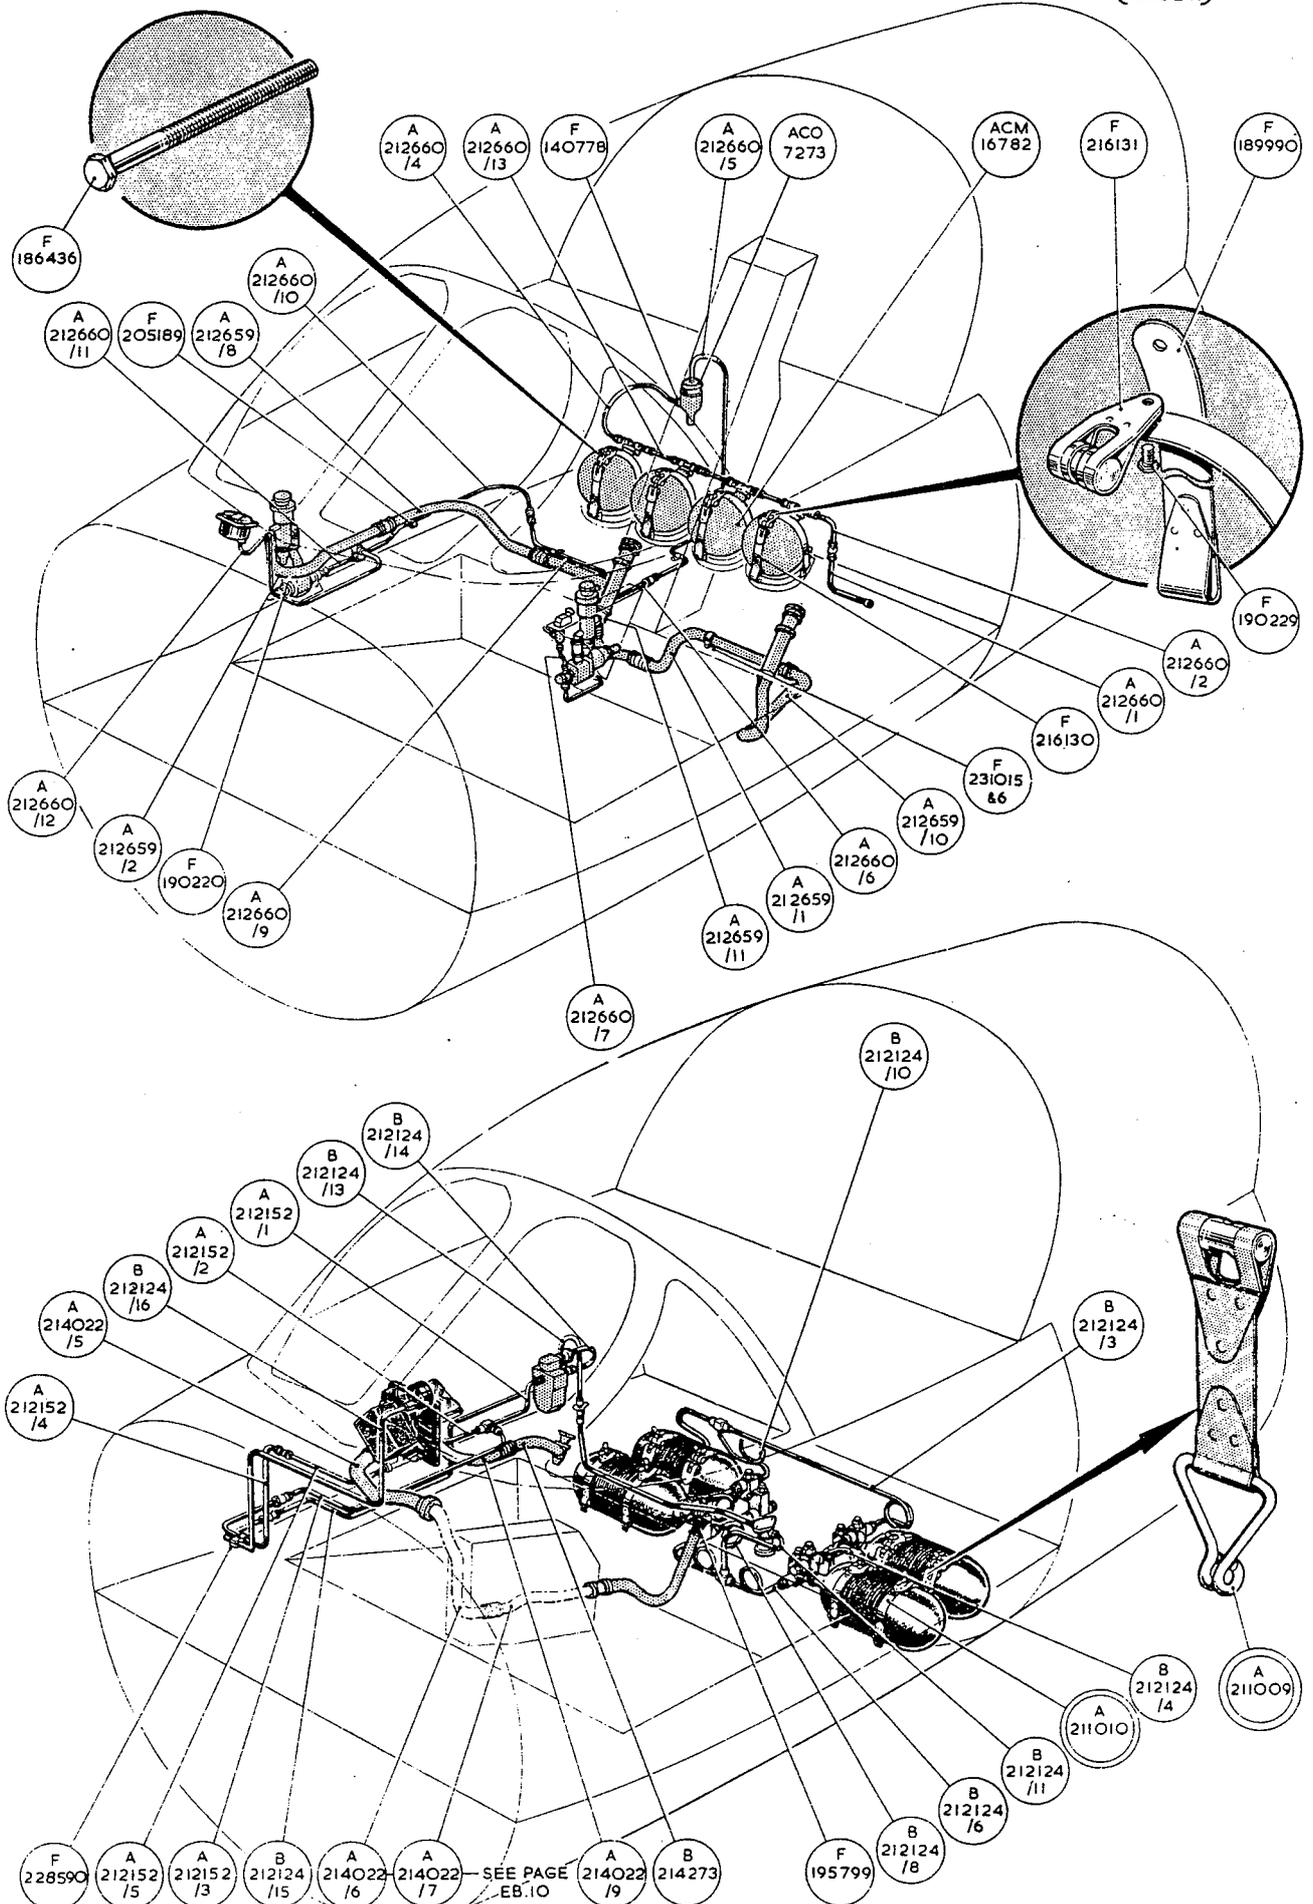

OXYGEN & ANTI 'G' INSTALLATION

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

