

SERVICES—PILOTS ANTI "G" INSTALLATION


22

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
	E.212575	PILOTS ANTI "G" INSTALLATION, ASSEMBLY					—	—		
3901	F.194724	Block, clamp					4	LFS.21	C.	
5145	F.205189	Block, clamp					2	LFS.21	C.	NK.1
	F.264072	Block, packing, under port pipe guard (Mod. 1430)					1			
863	F.190229	Bottle, air bottle strap connecting					4	S.95.B	C.	NK.1
447	F.186436	Bolt, air bottle strap connecting					4	S.95.B	C.	NK.1
27VA/4619941	Dunlop	Bottle, air spherical, 1/8" B.S.P.					4	—	A.	NK.1
	ACM.16782									
9805	F.231015	Cleat, top, for pipe guard					2	LFS.21	C.	NK.1
9806	F.231016	Cleat, bottom, for pipe guard					2	LFS.21	C.	NK.1
864	F.190220	Clip, mounting, for reducing valve					1	S.51	C.	NK.1
	Std.2045/29/22	Clip, sleeved					4	S.510 or		6
									S.511	
11303	Std.2046/17/26	Clip, sleeved					2	S.510 or	C.	6
	Std.2046/29/22	Clip, sleeved					1	S.510 or		6
								S.511		
865	Std.1178/3	Clip, mounting, for reducing valve					1	S.510 & T.26	C.	4
3774	Std.1306/N/20	Coupling, flexible, 5/8" i/d x 2" long,					5	DTD.625A	MR/C	4
		at anti "G" valve connection						or F.67		
		(Make from 32C/1275067)								
—	Std.1306/N/45	Coupling, flexible, 5/8" i/d x 4.5" long,					1	DTD.625A	—	4
		at anti "G" valve connection						or F.67		
		(Make from 32C/1275067)								
27VA/9006816	Dunlop	Filter					1	—	A.	NK.1
	ACO.7273									
6A/4333066	—	Gauge, pressure, Mk. 14, K.K.					1	—	A.	
	B.231017	Guard, pipe, port					1	L.72		
	B.231018	Guard, pipe, starboard					1	L.72		
8958	Dunlop	Hose, kink proof, 5/8" i/d x 3" long, port					1	—	C.	
	DAS.412E/3.0"									
9868	Dunlop	Hose, kink proof, 5/8" i/d x 5.50" long,					1	—	C.	
	DAS.412E/5.5"	starboard								
6A/1037413	—	Label, at pressure gauge					1	—	—	
	C.212224	Panel, control, group					1	—		
	F.213082	Block, locating handle					1	LFS.21		
	C.212079	Bracket, mounting					1	L.72		
	C.212080	Bracket, mounting					1	L.72		
8959	F.212096	Clamp, half, supporting reducing valve					2	L.65.C	C.	
8960	F.212097	Clamp, half, supporting reducing valve					1	L.65.C	C.	
8961	F.212098	Clamp, half, supporting reducing valve					1	L.65.C	C.	
3774	Std.1306/N/20	Coupling, flexible, 5/8" i/d x 2" long,					1	DTD.625A	MR/C	4
		at anti "G" valve connection						or F.67		
		(Make from 32C/1275067)								
	A.213080	Handle, control					1	—		
	F.213083	Lever					1	T.26 & S.3		
†	A.212660/7	Pipe, valve selector to valve reducing					1	DTD.323		NK.1
	B.212089	Plate, top					1	L.72		
	F.213100	Stop, cable					1	S.510		
	Std.1509/24/200	Tube, distance					1	T.4		4
	Std.1509/26/62	Tube, distance					2	T.4		4
27VC/4607579	Palmer C.58.B	Valve, reducing					1	—	A.	
27VB/4497626	Hymatic S.V.9	Valve, selector					1	—	A.	
27VB/4495776	Hymatic A.C.2	Valve, anti "G"					1	—	A.	
10276	A.212659/1	Pipe, anti "G" valve to joint, port					1	L.54	C.	NK.1
10807	A.212659/2	Pipe, anti "G" valve to joint, starboard					1	L.54	C.	NK.1
10707	A.212659/8	Pipe, joint, to joint, starboard					1	L.54	C.	NK.1
10808	A.212659/10	Pipe, joint to hose, port					1	DTD.323 or	C.	NK.1
								DTD.253		
9820	A.212659/11	Pipe, joint to hose					1	DTD.323 or	C.	NK.1
								DTD.253		

† For details see Piping Chart

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Place No.
		1	2	3	4	5				
†	A.212660/1	Pipe, 4-way piece to non-return valve					1	DTD.323		NK.1
†	A.212660/2	Pipe, non-return valve to air bottle					1	DTD.323		NK.1
†	A.212660/4	Pipe, bottle to filter					1	DTD.323		NK.1
†	A.212660/5	Pipe, filter to union					1	DTD.323		NK.1
†	A.212660/6	Pipe, union to valve selector					1	DTD.323		NK.1
†	A.212660/8	Pipe, valve reducing to union					1	DTD.323		—
†	A.212660/13	Pipe, bottle to bottle					3	DTD.323		NK.1
†	A.212660/9	Pipe, union to union					1	DTD.323		NK.1
†	A.212660/10	Pipe, union to tee-piece					1	DTD.323		NK.1
†	A.212660/11	Pipe, tee-piece to valve reducing					1	DTD.323		NK.1
†	A.212660/12	Pipe, tee-piece to pressure gauge					1	DTD.323		NK.1
4179	Std.1606/44/B.20 or Std.2095/209/B20	Screw, securing pressure gauge					4	Brass	C.	5
8962	F.216131	Shackle					4	—	C.	NK.1
27VA/2224239	Dunlop ACO.6580	Socket, quick release, 5/8" dia.					2	—	C.	
1476	F.189990	Strap, air bottle					8	DTD.166	C.	NK.1
8963	F.216130	Strap, air bottle					4	DTD.168	C.	NK.1
3787	Std.1507/23/035	Tube, distance, for reducing valve mounting					2	T.26	MR/C	4
	Std.1507/23/050	Tube, distance					1	T.26		4
	Std.1509/23/020	Tube, distance					1	T.4		4
4027	Std.1509/23/060	Tube, distance					4	T.4	MR/C	4
869	F.140778	Union, reducing					1	L.1	C.	NK.1
27Q/4117446	Dowty D.5213.Y	Valve, non-return					1	—	B.	
27VC/4607575	Palmer C.58	Valve, reducing					1	—	A.	
27VB/4495776	Hymatic AC.2	Valve, and "G"					1	—	A.	
870	Std.915/B/18	Washer, at air bottle securing strap					12	DTD.160	C.	4
† For details see Piping Chart										

† For details see Piping Chart

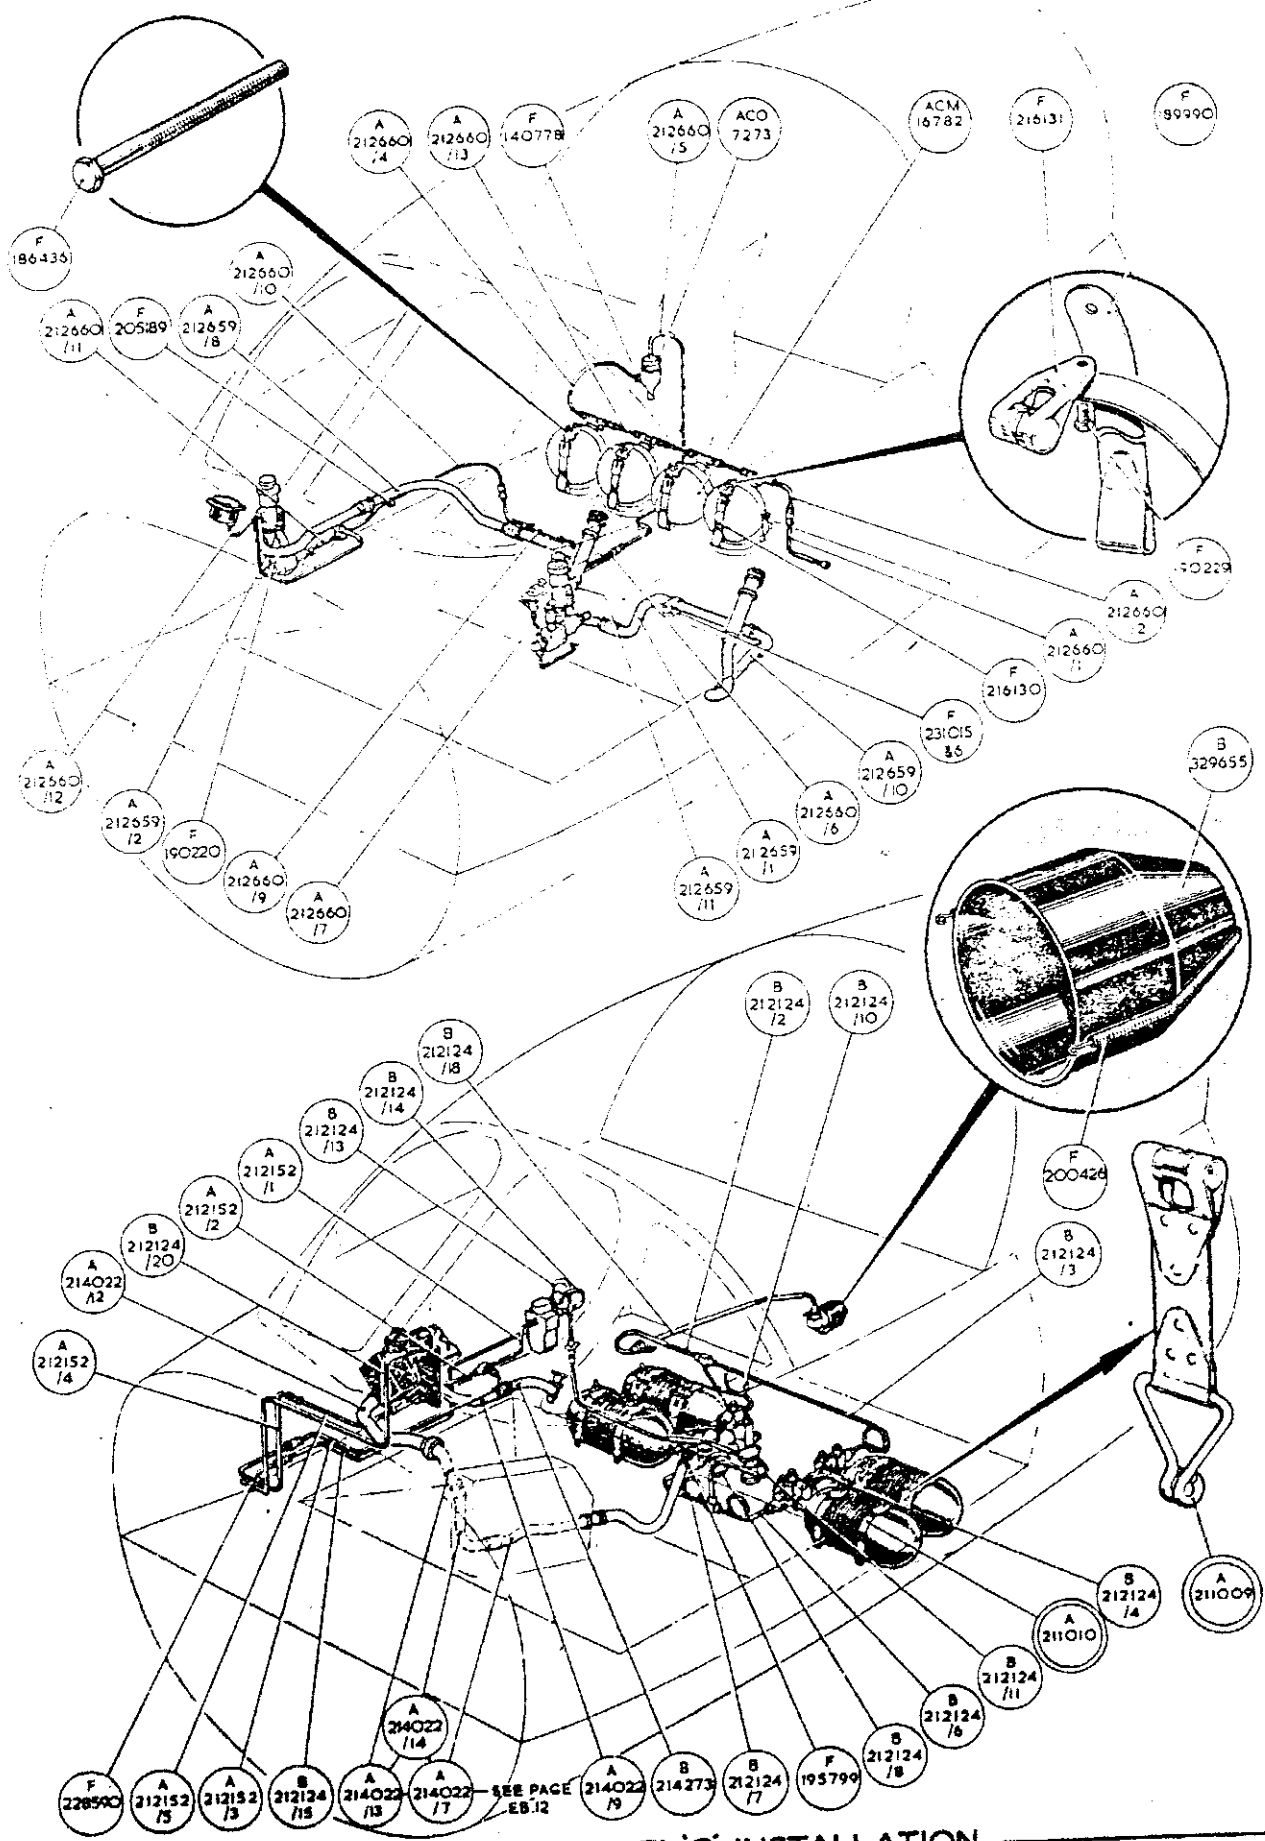

OXYGEN & ANTI 'G' INSTALLATION



This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.