

Hunter F.G.A. Mk. 9

SERVICES-PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Score	Plate No.
		1	2	3	4	5				
		PILOT'S ANTI "G" INSTALLATION, ASSEMBLY								
	D.190124						1	—		
861	F.188884	Angle, mounting, anti "G" valve					1	DTD.610	C.	NK.1
862	F.188882	Angle, mounting, anti "G" valve					2	DTD.610	C.	NK.1
863	F.190229	Bolt, special, connecting air bottle straps					2	S.95.B	C.	NK.1
447	F.186436	Bolt, special, strap clamping					2	S.95.B	C.	NK.1
27VA/3988	Dunlop	Bottle, air, spherical					2	—	A.	
	ACM.16782									
864	F.190220	Clip, mounting, reducing valve					1	S.3	C.	NK.1
865	Std.1178/3	Clip, mounting, reducing valve					1	S.3 & T.26	C.	4
	Std.2045/29/22	Clip, sleeved					2	S.510 or S.511		
	Std.2046/29/22	Clip, sleeved					1	S.510 or S.511		
4667	Std.850/28	Clip, securing pipes, $\frac{1}{8}$ " wide $\times$ 22 S.W.G. $\times$ 2-8" long					2	DTD.610	C.	4
3774	Std.1306/N/20	Coupling, flexible, $\frac{3}{8}$ " i/d $\times$ 2-0" long					4	DTD.625A	MR/C	4
		(Make from 32C/450)								
4276	Std.1306/N/38	Coupling, flexible, $\frac{3}{8}$ " i/d $\times$ 3-8" long <i>(make from 32C/450)</i>					1	DTD.625A	MR/C	4
1707	A.193653	Elbow, at cockpit shelf side wall					1	L.54 or T.9	C.	
27VA/3443	Dunlop ACO.7273	Filter					1	—	A.	
6A/2691	—	Gauge, pressure, Mk. 14.KK					1	—	A.	
2851	Dunlop	Hose, kink proof, $\frac{3}{8}$ " i/d $\times$ 42 $\frac{1}{2}$ " long (D.190124/1)...					1	—	C.	
	DAS/412/E/12-5	$\frac{3}{8}$ " to $\frac{1}{2}$ "								
6A/2771	—	Label, air					1	—	C.	
†	A.190201/1	Pipe, 4-way piece to non-return valve					1	DTD.323		
†	A.190201/2	Pipe, non-return valve to air bottle					1	DTD.323		
†	A.190201/3	Pipe, air bottle to air bottle					1	DTD.323		
†	A.190201/4	Pipe, air bottle to filter					1	DTD.323		
1948	A.190201/5	Pipe, filter to tee-piece					1	DTD.323	C.	
†	A.190201/6	Pipe, tee-piece to selector valve					1	DTD.323		
†	A.190201/7	Pipe, selector to reducing valve					1	DTD.323		
†	A.190201/8	Pipe, tee-piece to gauge					1	DTD.323		
3591	A.193654/1	Pipe, anti "G" valve to connection					1	L.54 & T.9	C.	
†	A.193654/2	Pipe, connection					1	L.54 & T.9		
†	A.193654/3	Pipe, connection to elbow					1	L.54 & T.9		
3839	Std.1606/44/B16	Screw, securing elbow, 4 B.A. $\times$ $\frac{1}{2}$ " long					3	Brass	C.	5
1720	Std.1606/44/B24	Screw, securing pressure gauge					4	—	C.	5
866	F.189989	Strap					2	DTD.166	C.	NK.1
27VA/3445	Dunlop ACO.6580	Socket, quick release					1	—	A.	
867	F.189991	Strap, air bottle					4	DTD.166	C.	NK.1
868	F.190003	Strap, air bottle					2	DTD.166	C.	NK.1
3787	Std.1507/23/035	Tube, distance, $\frac{1}{8}$ " o/d $\times$ 17 S.W.G. $\times$ 35" long					2	T.26	MR/C	4
		(Make from 30A/966)								
3808	Std.1509/23/040	Tube, distance, $\frac{1}{8}$ " o/d $\times$ 17 S.W.G. $\times$ 4" long					2	T.4	MR/C	4
		(Make from 30B/557)								
3802	Std.1509/23/085	Tube, distance, for clip securing pipe, $\frac{1}{8}$ " o/d $\times$ 17 S.W.G. $\times$ 85" long (Make from 30B/557)					1	T.4	MR/C	4


† For details see Piping Chart

RESTRICTED

Hunter F.G.A. Mk. 9

SERVICES-PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description							No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5						
869	F.140778	Union, reducing	...	...	...	...	...	...	1	L.1	C.	NF.1
27VB/3254	Hymatic AG.2	Valve, anti "G"	...	...	...	...	...	...	1	—	A.	
27Q/1539	Dowty D.5213Y	Valve, non-return	...	...	...	...	...	...	1	—	A.	
27VC/27	Palmer C.58	Valve, reducing	...	...	...	...	...	...	1	—	A.	
27VB/3441	Hymatic SV.9	Valve, selector	...	...	...	...	...	...	1	—	A.	
870	Sed.915/B/18	Washer	...	...	...	...	...	...	6	DTD.610	C.	4

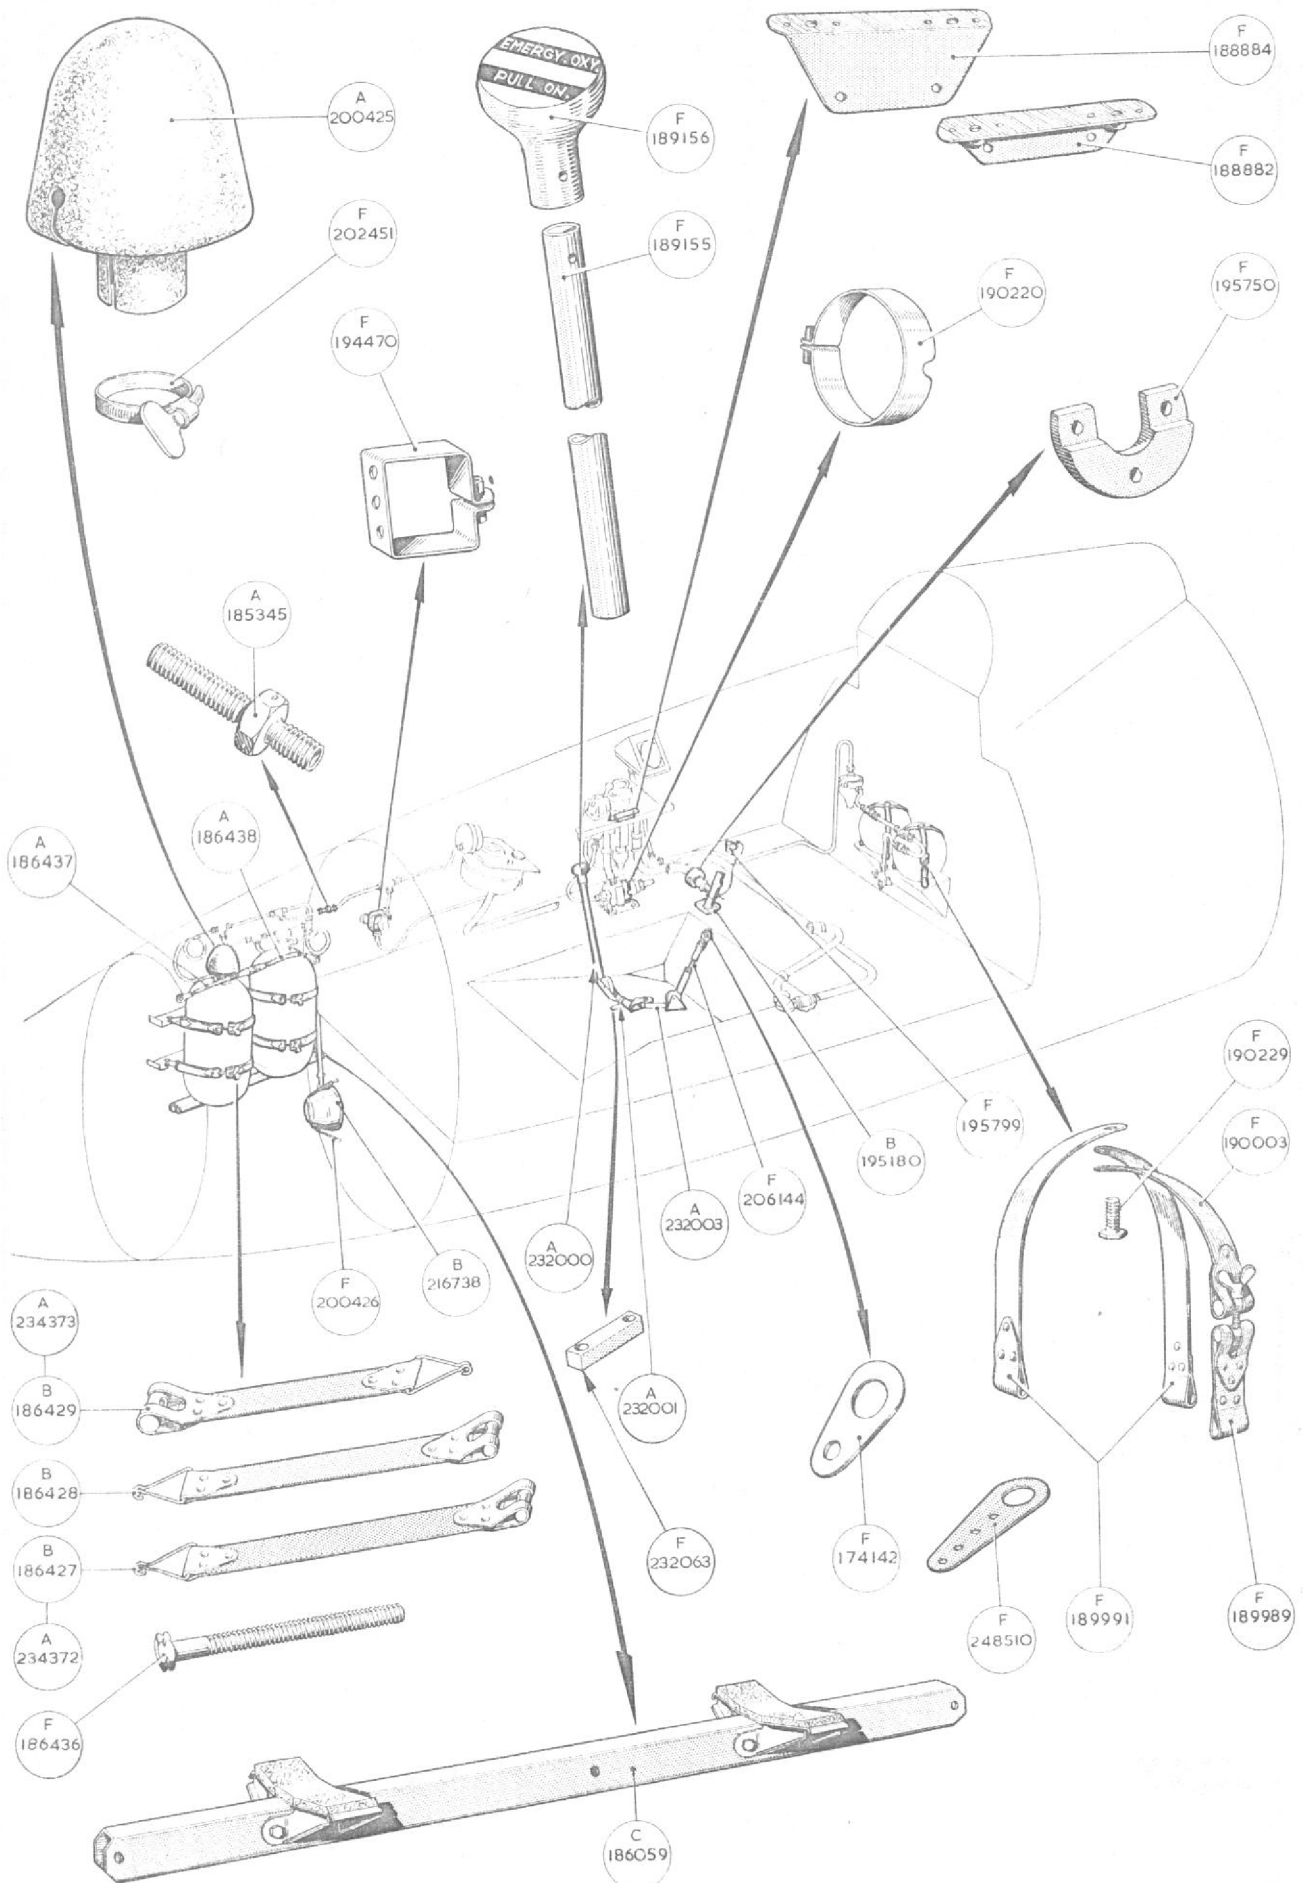

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

