

RESTRICTED

Hunter F.G.A. Mk. 9
Issued with A/L No. 11

Page RE.1

UNDERCARRIAGE - NOSE WHEEL DOOR OPERATING GEAR

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
	B.179108	NOSE WHEEL DOOR OPERATING GEAR,					—	—		
		ASSEMBLY								
1531	F.152672	Bolt, jack attachment to frame 3					1	S.2	C.	RE.1
1533	F.156330	Bolt, jack attachment to lever					1	S.2	C.	RE.1
3115	A.178904	Bracket, mounting, for cross shaft, port, group					1	—	MR/B	RE.1
117	F.178906	Bush					1	BSS.369	C.	RE.1
3116	A.178905	Bracket, mounting, for cross shaft, starboard, group					1	—	MR/B	RE.1
117	F.178906	Bush					1	BSS.369	C.	RE.1
27QM/1890	Dowty O7584Y.AO.2	Jack, door					1	—	A.	
8101	A.218101	Rod, connecting, group					2	—	C.	RE.1
28R/12720	AGS.589/3/PB	Ball					2	—	C.	
5859	F.208205	Locknut, L.H.					1	S.1	C.	RE.1
5860	F.208206	Locknut, R.H.					1	S.1	C.	RE.1
5862	F.204656	Pin					1	S.96.B or S.95.B	C.	RE.1
5863	F.204657	Pin					1	S.96.B or S.95.B	C.	RE.1
8103	A.218085	Rod, end, complete					1	S.1	C.	RE.1
8102	F.218084	Turnbuckle					1	S.1	C.	RE.1
8104	F.218070	Washer, locking					1	S.1	C.	RE.1
8124	B.215854	Shaft and lever, group					1	—	B.	RE.1
124	Std.532/15	Ferrule					8	S.95.B or S.96.B	C.	4
7063	A.208999	Lever					1	S.3	C.	RE.1
125	A.178907	Lever, for door connection					1	Stpg. 1699	C.	RE.1
126	A.178908	Lever, for door and jack					1	Stpg. 1700	C.	RE.1
	A.178909	Shaft					1	T.50		
	F.168113	Spigot					2	S.1		
	Std.1508/2/118	Tube, distance					1	T.26		4
12501	Std.1208/105/56/10	Shim, between bush and bracket (0.03" max.)					QR	—	C.	4

RESTRICTED

RESTRICTED


Page RE.2

Hunter F.G.A. Mk. 9
Issued with A/L No. 11

UNDERCARRIAGE - NOSE WHEEL DOOR OPERATING GEAR

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
		SUMMARY OF STOCK ITEMS								
28D/12515	A.25.10.C	Bolt, 2	B.A.				—	—	—	
28D/12536	A.25.13.C	Bolt, 2	B.A.				—	—	—	
28D/1011021	A.25.16.C	Bolt, 2	B.A.				—	—	—	
28N/9156370	SP.21	Nipple, lubricating					—	—	—	
28N/	AGS.554	Nipple, lubricating (Use 28N/9156370)					—	—	—	
28M/9403520	A.27.CP	Nut, plain, 2	B.A.				—	—	—	
28M/1011467	A27.ES	Nut, 1/4"	B.S.F.				—	—	—	
28M/1011470	A27.GT	Nut, lock, 5/16"	B.S.F.				—	—	—	
28M/13464	A27.GTL	Nut, lock, 5/16"	B.S.F.				—	—	—	
28P/19152	SP.90.C4	Pin, split					—	—	—	
28P/19154	SP.90.C7	Pin, split					—	—	—	
28W/9419475	SP.15.C	Washer, 2	B.A.				—	—	—	
28W/9419404	SP.16.C	Washer, 2	B.A.				—	—	—	
28W/9419405	SP.15.E	Washer, 1/4"	dia.				—	—	—	
28W/1200106	SP.42.C	Washer, tab					—	—	—	

RESTRICTED

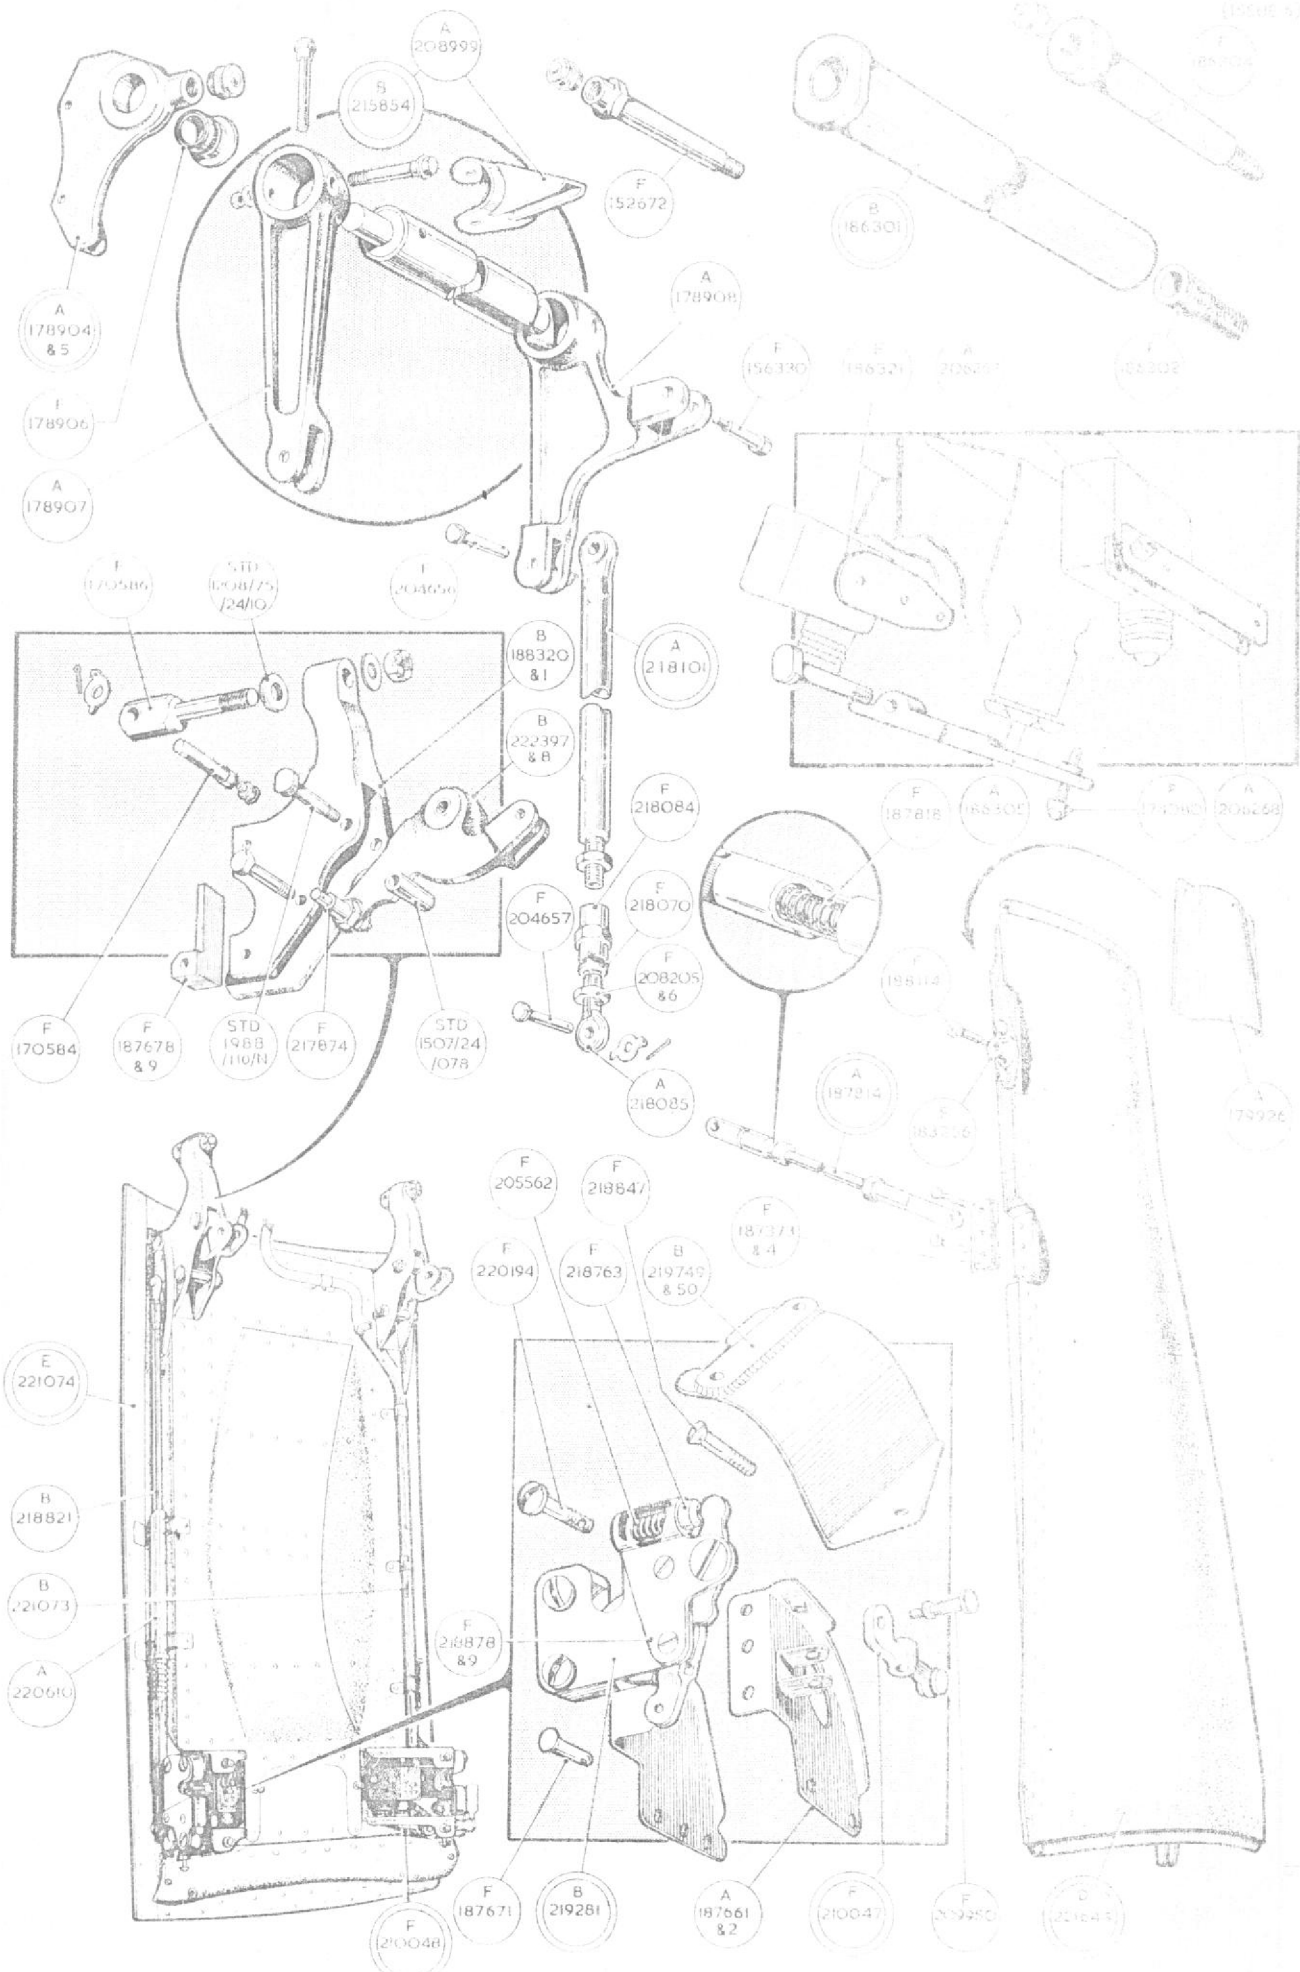

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

