

GROUP D.9
AUTOSTABILIZER (CODE AS)
LIST OF CONTENTS

<i>Para.</i>	<i>Para.</i>
<i>Equipment employed</i> 1	
DESCRIPTION	
<i>Autostabilizer installation</i>	
<i>General</i> 2	
<i>Gyro unit</i> 5	
<i>Phase advance unit</i> 6	
<i>Monitor unit</i> 7	
<i>Amplifier unit</i> 9	
<i>Slave relay unit</i> 12	
<i>Suppressor</i> 13	
<i>Operation</i> 14	
SERVICING	
<i>General</i> 19	
<i>Primary servicing</i> 20	
<i>Functioning test</i> 21	
REMOVAL AND ASSEMBLY	
<i>General</i> 24	
LIST OF ILLUSTRATIONS	
<i>Fig.</i>	
<i>Autostabilizer (sheet 1)</i> 1	
<i>Autostabilizer (sheet 2)</i> 2	

Equipment employed

1. The major components employed in the autostabilizer installation of this aircraft are listed below, together with the appropriate Air Publications to which reference should be made for a detailed description and the necessary servicing required to maintain them in an efficient condition.

NOTE . . .

The autostabilizer installation will only be found in aircraft with Mod.91 and 417 incorporated. Mod.873, however,

Servomotor, Type B

Slave relay, Type A

Gyro unit, Type A

Amplifier unit, Type A

Phase advance unit, Type B

Monitor unit, Type B

Control switch, Type A

Suppressor, Type G.5

} A.P.1469S, Vol.1, Sect.3

... A.P.4343C, Vol.1, Book 3, Sect.5

renders the installation inoperative by the removal of fuse 14 from the cabin starboard shelf and fuses 4 and 5 from the a.c. distribution box. Cable AS.13 has also been removed and the control switch is wire locked in the OFF position. To prevent rotation of the servomotor armature and operating shaft due to aircraft manoeuvres, the servomotor is locked by clips and half clamps.

In consequence of Mod.873, the monitor unit is redundant and to obviate servicing operations Mod.975 authorizes its removal, complete with cable assembly A.S.6.

◀ On Post Mod.1026 aircraft all the components of the autostabilizer installation, together with the interconnecting cable assemblies have been removed. Note must however be taken of the references to Mods. 873 and 975 for Pre Mod.1026 aircraft. ►

DESCRIPTION**Autostabilizer installation****General**

2. The autostabilizer installation of this aircraft is designed to detect and suppress the tendency for the aircraft to yaw. The correcting action is made by movement of the rudder trimming tab, about its normal trim position, by an electric servomotor mounted in the fin. The installation employs a.c. and d.c. power; the a.c. being 115 volts, 400 cycles per second, 3-phase, which is obtained from the inverters of the

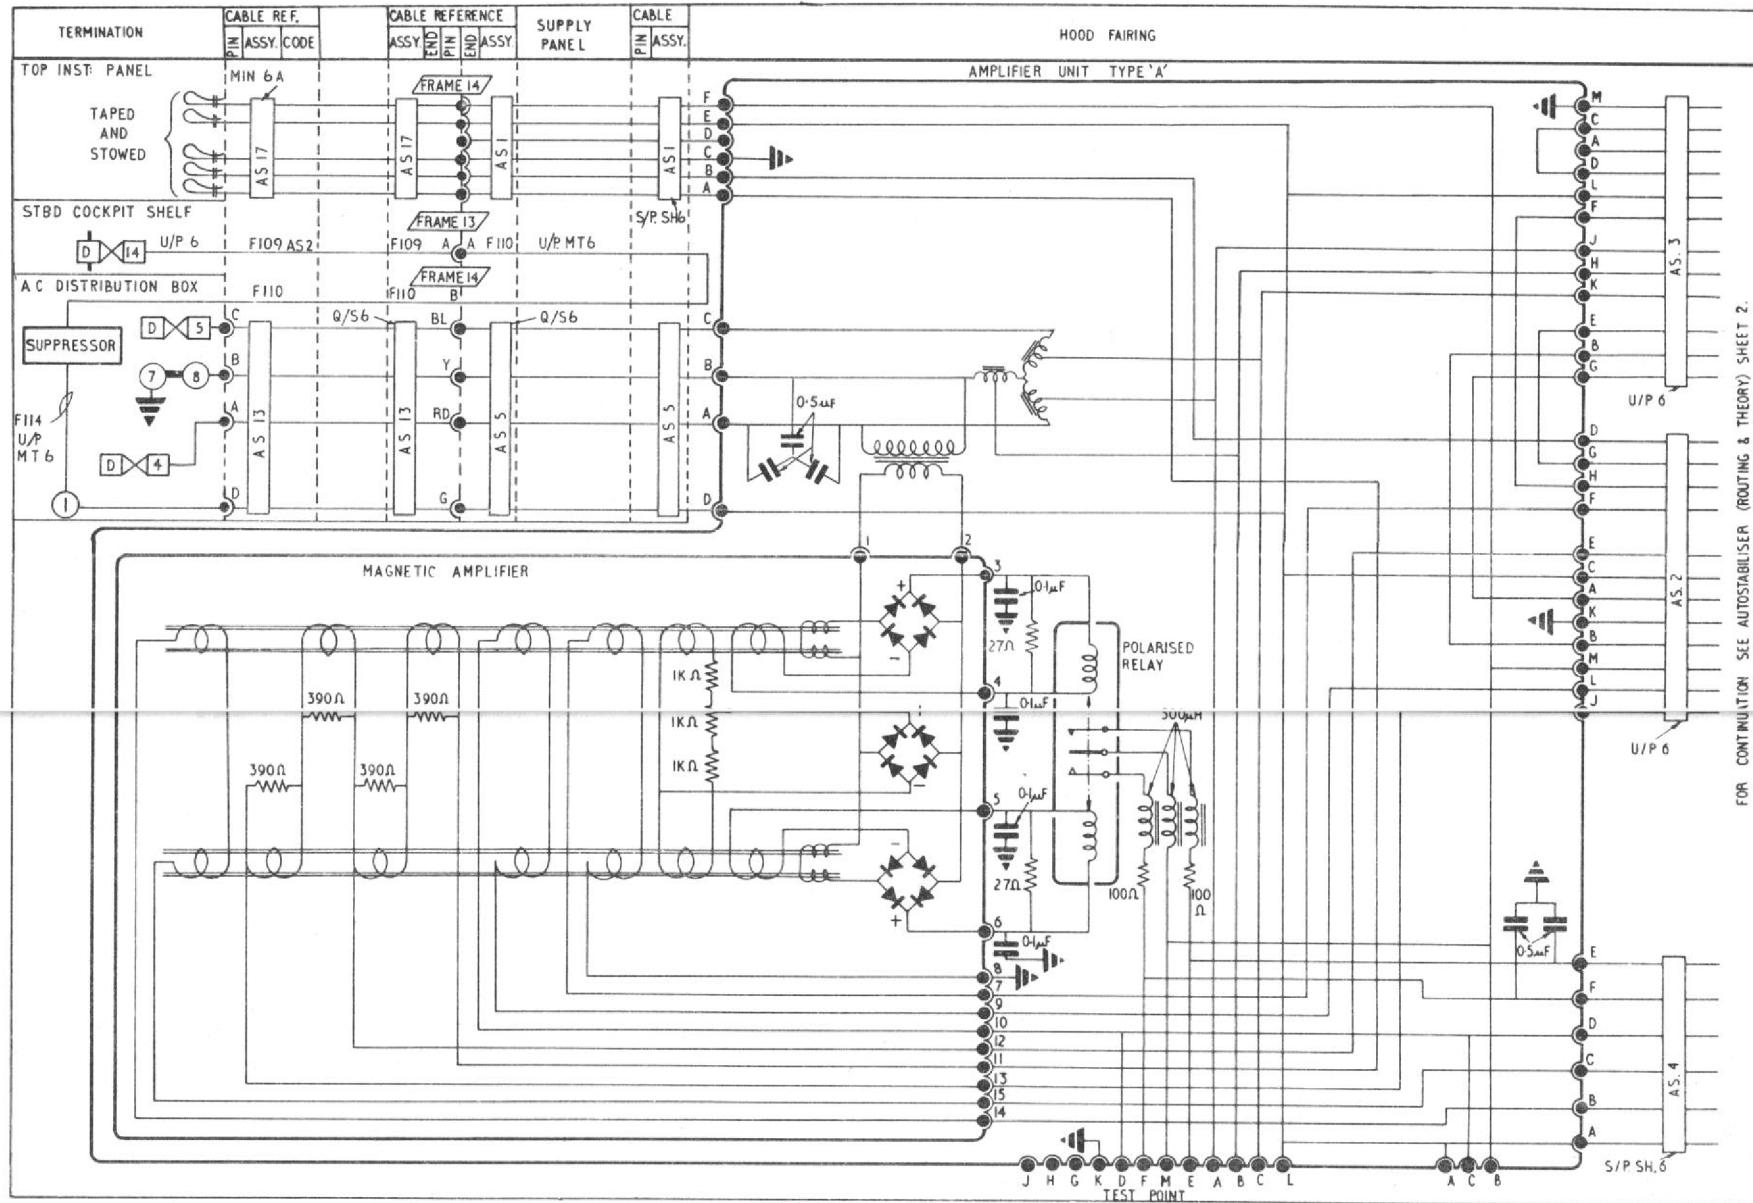


Fig.1 Autostabilizer (sheet 1)

RESTRICTED

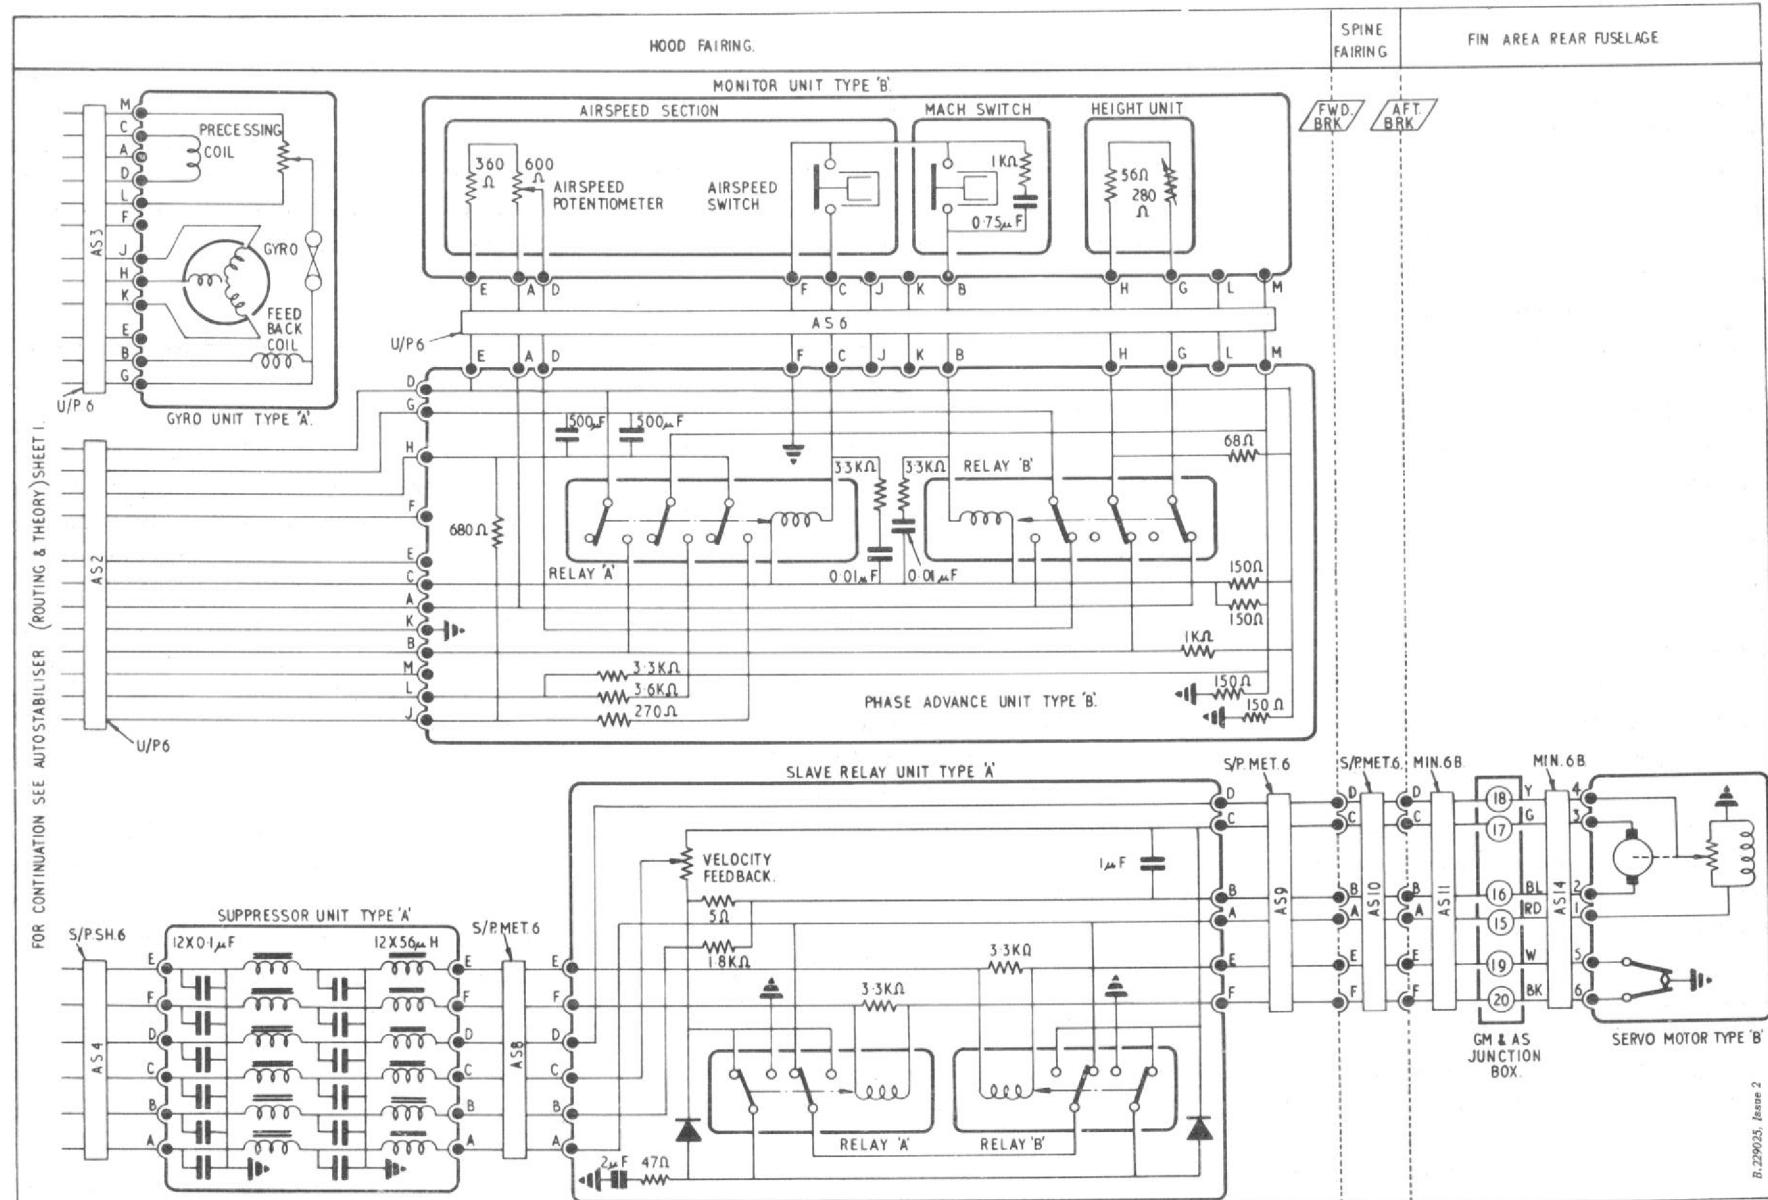


Fig.2. Autostabilizer (sheet 2)

a.c. supplies circuit, described in Group E.1. The d.c. power is taken from the aircraft's main 28 volt supply panel.

3. The installation is controlled by a three position switch engraved OFF, STANDBY and ON. This switch is situated in the cabin on the top starboard instrument panel.

4. In addition to the control switch and servomotor, the installation also incorporates a gyroscope, phase advance unit, monitor, amplifier, suppressor and slave relay, all of which are situated in the hood fairing and described in the following paragraphs.

Gyro unit

5. This unit is mounted on a bracket fixed to the top of the front fuselage at frame 17A on the port side in the hood fairing. The unit detects the rate of movement of the aircraft in yaw (in excess of three degrees per minute) by precession of the gimbal arm moving a wiper over a potentiometer resistance winding and transmitting a proportional d.c. signal to the monitor unit via the phase advance stage.

Phase advance unit

6. This unit is mounted in the hood fairing, aft of frame 14 on the centre line of the aircraft. The unit counteracts electrical and mechanical delays in the whole system by an arrangement of a passive-resistor-capacitor network. Certain relays operated by the monitor mechanism are

also contained within the phase advance unit.

Monitor unit

7. This unit is suspended under a mounting structure between frames 15 and 16 on the port side of the hood fairing. The unit is connected to the pressure and static pipe-lines of the pressure head installation described in Group 3.A, Section 5, Chapter 2.

8. Signals received by the monitor unit are varied according to the indicated air speed, height and Mach number within certain limits. The unit consists of conventional mechanisms without pointers; the final drive, in the case of air speed and height, being a variable resistor with a pick-off wiper. The machmeter has contacts which operate at a pre-set value.

Amplifier unit

9. The amplifier unit, which contains a magnetic amplifier and Carpenter relay, is situated on a mounting structure between frames 15 and 16 on the starboard side of the hood fairing. The unit is employed to integrate the signals from the gyro, phase advance and monitor units with the servomotor feedback signals and amplify the resultant, to operate the slave relays via the Carpenter relay.

10. The magnetic amplifier consists essentially of two iron cores around which a.c. and d.c. coils are wound. The a.c. output appears as d.c. after rectification. When the gyro signal input is at zero the

amplifier is balanced, maintaining the Carpenter relay in the centre (OFF) position.

11. The Carpenter relay is of the centre-stable type, polarized to respond to "sensed" signals from the magnetic amplifier. Out-of-balance conditions in the amplifier operate the relay in whichever direction the signal dictates.

Slave relay unit

12. This unit is located between frames 15 and 17A on the starboard side of the hood fairing. The unit contains two relays and a velocity feedback potentiometer. The relays are controlled by the Carpenter relay in the amplifier unit and, in turn, control the d.c. supply to the armature of the servomotor. The function of the velocity potentiometer is to transmit a feed-back signal in proportion to the servo-motor armature speed to the magnetic amplifier in opposition to the input signal.

Suppressor

13. This suppressor is mounted on the forward face of the amplifier mounting structure on the starboard side of the hood fairing. The suppressor is used as a guard against interference with the V.H.F. radio installations of the aircraft.

Operation

14. The basic principles of autostabilizer operation are described in A.P.1469S, Vol.1, to which reference should be made when detailed information is required. A brief summary of the method of operation

of the equipment installed in this aircraft is, however, given in the following paragraphs.

15. The control switch is engraved OFF, STANDBY and ON. In the ON position, the whole installation is operative, but in the STANDBY position the circuit connecting the gyro pick-off signal to the magnetic amplifier is interrupted and isolates the detecting circuit. When the switch is in the OFF position, both the detecting circuit and the d.c. supply to the servomotor armature are disconnected.

16. With the power switched on and the installation energized, yaw oscillation is detected by the rate gyroscope in the gyro unit. Precession of the gyroscope operates the potentiometer wiper and a d.c. voltage signal is transmitted to the monitor unit via the phase advance unit. This signal is proportional to the rate of precession and "sensed" to detect direction of oscillation.

17. To provide optimum performance from the installation under varying flight conditions, the gyro signal is modified by the monitor unit in accordance with air speed, height and Mach number. The modified signal is then advanced by the phase advance unit to counteract any delays in the system, and fed to the magnetic amplifier. In the amplifier this signal is integrated with the feed-back signals from the servomotor and the amplified result operates the centre-stable Carpenter relay in whichever direction the signal dictates.

18. The contacts of the Carpenter relay connect a d.c. supply to energize one or the other of the relays in the slave relay unit. These relays, in turn, complete the circuit to the servomotor armature, thus controlling the direction of rotation of the servomotor and the rudder tab movement. To ensure that the rotation of the servomotor armature is proportional to the gyro signal, a position feedback signal is fed to the magnetic amplifier from a potentiometer in the servomotor. This feedback signal cancels the effect of the input signal when the servomotor is displaced by an amount which produces the required feedback current. To suppress hunting of the servomotor due to lag and overshoot, a signal, proportional to the servomotor velocity and in opposition to the input signal, is also fed back to the magnetic amplifier.

SERVICING

General

19. General servicing of the electrical system is described in Group A.1. Apart from the primary servicing and functional tests described in the following paragraphs, all other servicing is described in the Air Publications quoted in paragraph 1.

Primary servicing

20. Primary servicing of the autostabilizer installation is confined to examination for signs of damage and ensuring that all the units are securely mounted. Plug and socket connections must be checked for security of attachment one to another.

Functioning test

21. With the aircraft services on and the autostabilizer control switch set to ON, push the tail of the aircraft to port. The rudder tab should move to starboard and return smoothly to the neutral position. Push the tail of the aircraft to starboard. The rudder tab should move to port and return smoothly to the neutral position.

22. If the test in paragraph 21 is satisfactory, check the standby position by setting the control switch to STANDBY and repeating the test in paragraph 21. There should be no movement of the rudder tab.

23. If the tests are not satisfactory, the use of the No.1, Mk.2 test set will be necessary to establish which unit is at fault. This test set, with Mod. ASTAB S/50 incorporated, must also be used when checking the tab travel as quoted in Sect.3, Chap.4. The tab is moved in the required direction by operation of switch S.1 in the test set and held deflected by the depression of switch S.4. Instructions for the use of this test set appear in A.P.1469S, Vol.1.

WARNING

If, in the test procedure detailed above, the rudder tab moves in the opposite direction, the phase sequence may have been changed. This is a dangerous condition, and must be carefully checked from the a.c. supply source to the amplifier unit.

REMOVAL AND ASSEMBLY

General

24. Once access has been obtained, the removal and assembly of the components forming the autostabilizer installation should present no unusual difficulties. The location of and access to all the components is indicated in Group A.3.

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.



LIGHTNING MK. 1
COVER PILOT HEAD
EB2-88-5711