

ENGINE CONTROLS—FRONT FUSELAGE


Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Place No.
		1	2	3	4	5				
	C.188847	ENGINE CONTROLS IN FRONT FUSELAGE, ASSEMBLY					—	—		
	C.188850	Box, control, H.P. cock, group					1	—		
7101	F.211170	Block, mounting (Mod. 369)					1	LFS.21	MR/C	
913	F.188852	Bolt, special					3	S.1	C.	DB.1
—	—	Cable, assembly (See Cable Chart)					—	—	—	
914	A.189086	Handle					1	—	C.	DB.1
1480	Std.218/8	Nut (Mod. 369)					1	—	C.	4
	or									
7009	Std.1511/C	Nut (Mod. 369)					1	—	C.	
4111	F.199021	Plate, adaptor					1	DTD.610	C.	
915	A.189083	Plate, side					1	DTD.610	C.	DB.1
916	F.174699	Spring					2	DTD.215	C.	DB.1
10	5CW/2007871	Dowty C.5162Y Mk. 2					1	—	A.	
10	27K/4611236	Teleflex Unit, lever box					1	—	A.	
	C.36313									
	C.252145	Box, control, L.P. cock, assembly					—	—		
913	F.188852	Bolt, special					3	S.1	C.	DB.1
917	A.188851	Plate, side					1	DTD.610	C.	DB.1
10	27K/4611240	Teleflex Unit, lever box (Modified)					1	—	A.	
	C.36314									
1892	D.188688	Box, control, throttle, group					1	—	A.	DB.1
	C.188689	Box, throttle, control					1	—		
—	B.192435	Cable, GS.15, group (See Cable Chart)					1	—	—	
—	B.205488	Cable, F.37 group (See Cable Chart)					1	—	LM	
—	B.205590	Cable, F.53 group (See Cable Chart)					1	—	LM	
1893	F.174585	Eye-bolt, switch adjusting					1	S.1	C.	DB.1
2142	Std.532/7	Ferrule					2	S.80	C.	4
1894	F.176105	Handle, throttle damping, group					1	—	C.	DB.1
	F.167986	Rod					1	S.95.B		
1895	F.167984	Spring					1	Sp. Std.	C.	DB.1
10	1896	Lever					1	L.168	C.	DB.1
10	1897	Lever, damper, group					1	S.510	C.	DB.1
	1898	Block, rubbing					1	Ferobestos Grade LA	C.	DB.1
10	F.188705	Lever, switch operating					1	S.510 & T.26		
1899	B.188700	Lever, throttle control, group					1	—	B.	DB.1
	A.188702	Bearing, group					1	—		
10	26FX/13181	F.152086 Bush					2	B.55	C.	
	10774	Std.608/2 Bush					1	B.8	C.	4
10	1900	F.195880 Plate, support, micro switch					1	S.510	C.	DB.1
10	1901	F.195881 Plate, support, micro switch					1	S.510	C.	DB.1
	F.174662	Shaft					1	T.6		
5CW/9438275	—	Switch, micro, type 1A					1	—	B.	
10 or 5CW/1124465										
	3791	Std.1509/2/026 Tube, distance					1	T.4	MR/C	4
	3792	Std.1509/23/025 Tube, distance					1	T.4	MR/C	4
	3793	Std.1509/23/045 Tube, distance					1	T.4	MR/C	4
10	8B/4506222	— Unit, control, type T. Mk. 2A (A.920/64)					1	—	A.	
	Std.914/J24	Washer, rubbing					2	S.1 or S.510		4
	918	A.189576 Bracket, swivel support					1	S.510 or T.26	C.	DB.1
10	27K/4611194	Teleflex Break unit					3		C.	
	C.36706/B									


ENGINE CONTROLS—FRONT FUSELAGE

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Place No.
		1	2	3	4	5				
10	27K/4676684	Teleflex				Bulkhead connector	3	—	C.	
		B.35375/B								
10	27K/1059473	Teleflex				Cable	QR	—	C.	
		No. 380								
10	27K/4611196	Teleflex				Cable and break rod, assembly	3	—	C.	
		C.36424				Length of inner cables:—				
						Throttle 88.65"				
						HP Cock 87.15"				
						LP Cock 84.17"				
	5800	F.206576				Clamp	2	LFS.21	C.	DB.1
	919	F.189942				Clamp	5	LFS.21	C.	DB.1
	5801	F.206523				Clamp	2	LFS.21	C.	DB.1
	1702	F.193858				Clamp	1	LFS.21	C.	DB.1
	1703	F.193859				Clamp	1	LFS.21	C.	DB.1
	3734	Std.840/14				Clip, for earthing connector	2	DTD.610	C.	4
	11303	Std.2046/17/26				Clip, sleeved	2	—	C.	6
10	27K/1034953	Teleflex				Collar	16	—	C.	
		A.35336								
10	27K/4611060	Teleflex				Conduit (for lengths see Hawker drawings B.189945, ...	QR	—	C.	
		DS.307/2				B.189948—51 and A.205977—80)				
10	27K/8025551	Teleflex				Conduit, clamp	2	—	C.	
		B.726								
10	27K/4611069	Teleflex				Connector, conduit	3	—	C.	
		B.35340/B								
	4135	Std.1285/28C				Connector, earthing	2	—	C.	4
	920	F.175409				Fork-end	1	S.1	C.	DB.1
10	1940	Std.1231/1				Lug, locking, for swivel at frame 10	1	S.510	C.	4
	373	Std.1221/Y/D50				Pin	1	H.T.S.	C.	4
10	27K/1034951	Teleflex				Sleeve, outer	17	—	C.	
		A.35335								
10	27K/8006663	Teleflex				Sleeve, nut	1	—	C.	
		A.24242								
	27K/ †	Teleflex				Sliding screwed end	1	—	C.	
		C.36247								
	27K/	Teleflex				Swivel, spring loaded	1	—	C.	
		C.28166/C								
	5802	F.206557				Support, for conduit	2	LFS.21	C.	DB.1
						† For details see A.P.4515G, Vol. 3				

ENGINE CONTROLS—FRONT FUSELAGE

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
		SUMMARY OF STOCK ITEMS								
28D/12528	A.25.1B	Bolt,	4	B.A.			—	—	—	
28D/12511	A.25.2B	Bolt,	4	B.A.			—	—	—	
28D/9419452	A.25.3B	Bolt,	4	B.A.			—	—	—	
28D/12627	A.25.11B	Bolt,	4	B.A.			—	—	—	
28D/9436920	A.25.1C	Bolt,	2	B.A.			—	—	—	
28D/12531	A.25.3C	Bolt,	2	B.A.			—	—	—	
28D/12533	A.25.5C	Bolt,	2	B.A.			—	—	—	
28D/12566	A.25.6C	Bolt,	2	B.A.			—	—	—	
28D/12534	A.25.9C	Bolt,	2	B.A.			—	—	—	
28D/12515	A.25.10C	Bolt,	2	B.A.			—	—	—	
28D/12571	A.25.21E	Bolt,	1/4"	B.S.F.			—	—	—	
28D/8306	AS.1242.1C	Bolt,	2	B.A.			—	—	—	
28M/5236	A.14.E.B.	Nut,	1/4"	B.S.F.			—	—	—	
28M/9403520	A.27.C.P.	Nut,	2	B.A.			—	—	—	
28M/12930	A.27.E.S.	Nut,	1/4"	B.S.F.			—	—	—	
28M/10287	AGS.2001.B.1	Nut,	4	B.A.			—	—	—	
28M/10288	AGS.2001.C.1	Nut,	2	B.A.			—	—	—	
28M/10327	AGS.2002.B.1	Nut,	4	B.A.			—	—	—	
28M/10328	AGS.2002.C.1	Nut,	2	B.A.			—	—	—	
28P/14542	SP4.Y.A18	Pin					—	—	—	
28P/833	SP4.Y.B.7	Pin					—	—	—	
28P/1017	SP4.Y.B.17	Pin					—	—	—	
28S/6965	A.32.Z.8	Screw,	8	B.A.			—	—	—	
28S/14301	A.33.C.14	Screw,	2	B.A.			—	—	—	
28W/9418921	SP.13.E	Washer,	1/4"	B.S.F.			—	—	—	
28W/9419474	SP.15.B	Washer,	4	B.A.			—	—	—	
28W/9419475	SP.15.C	Washer,	2	B.A.			—	—	—	
28W/9416643	SP.47.C	Washer,	2	B.A.			—	—	—	

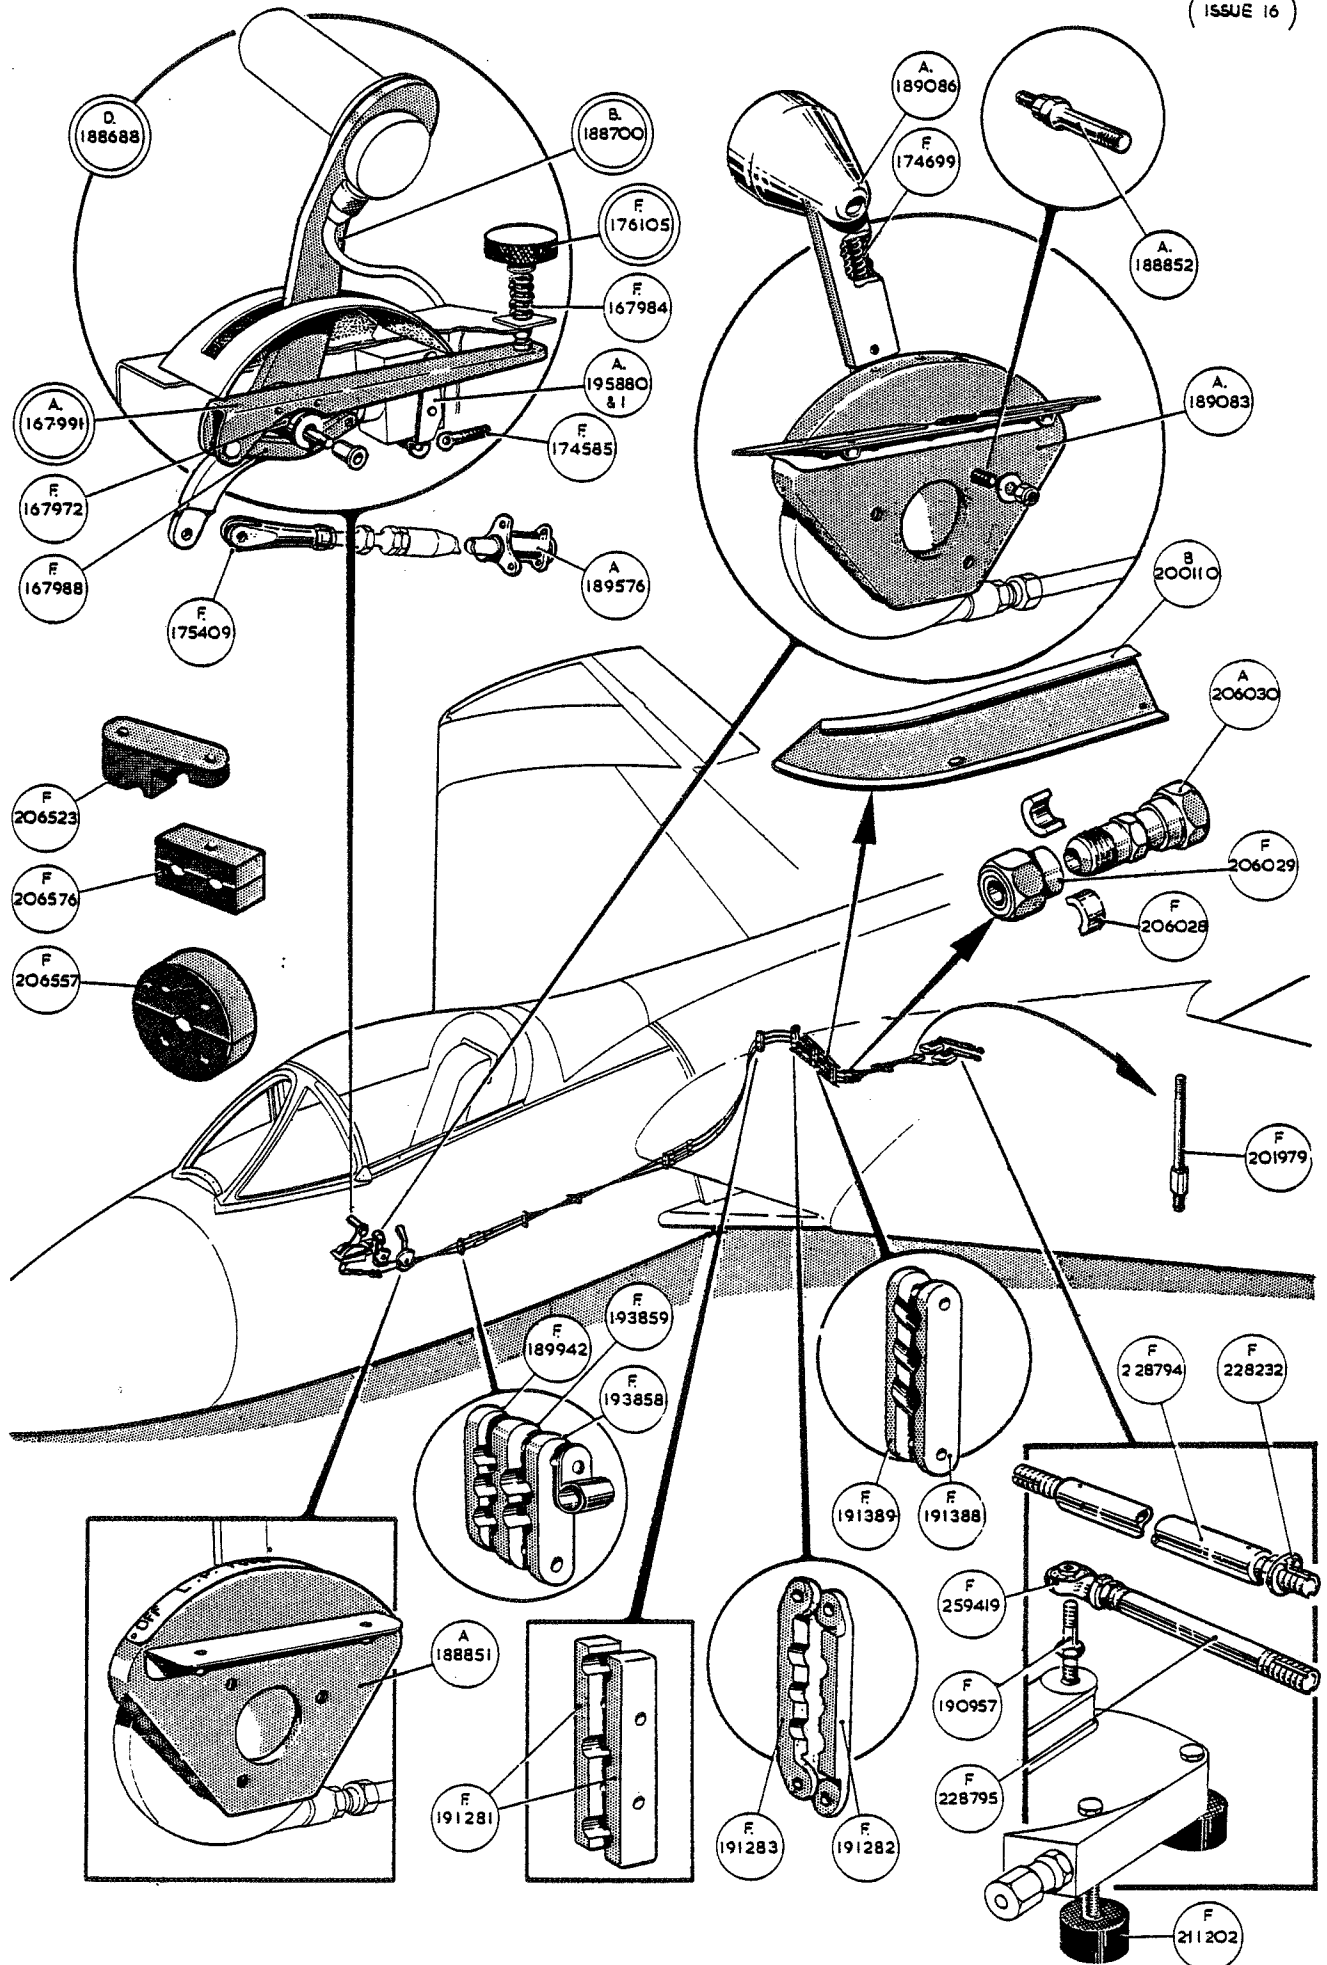

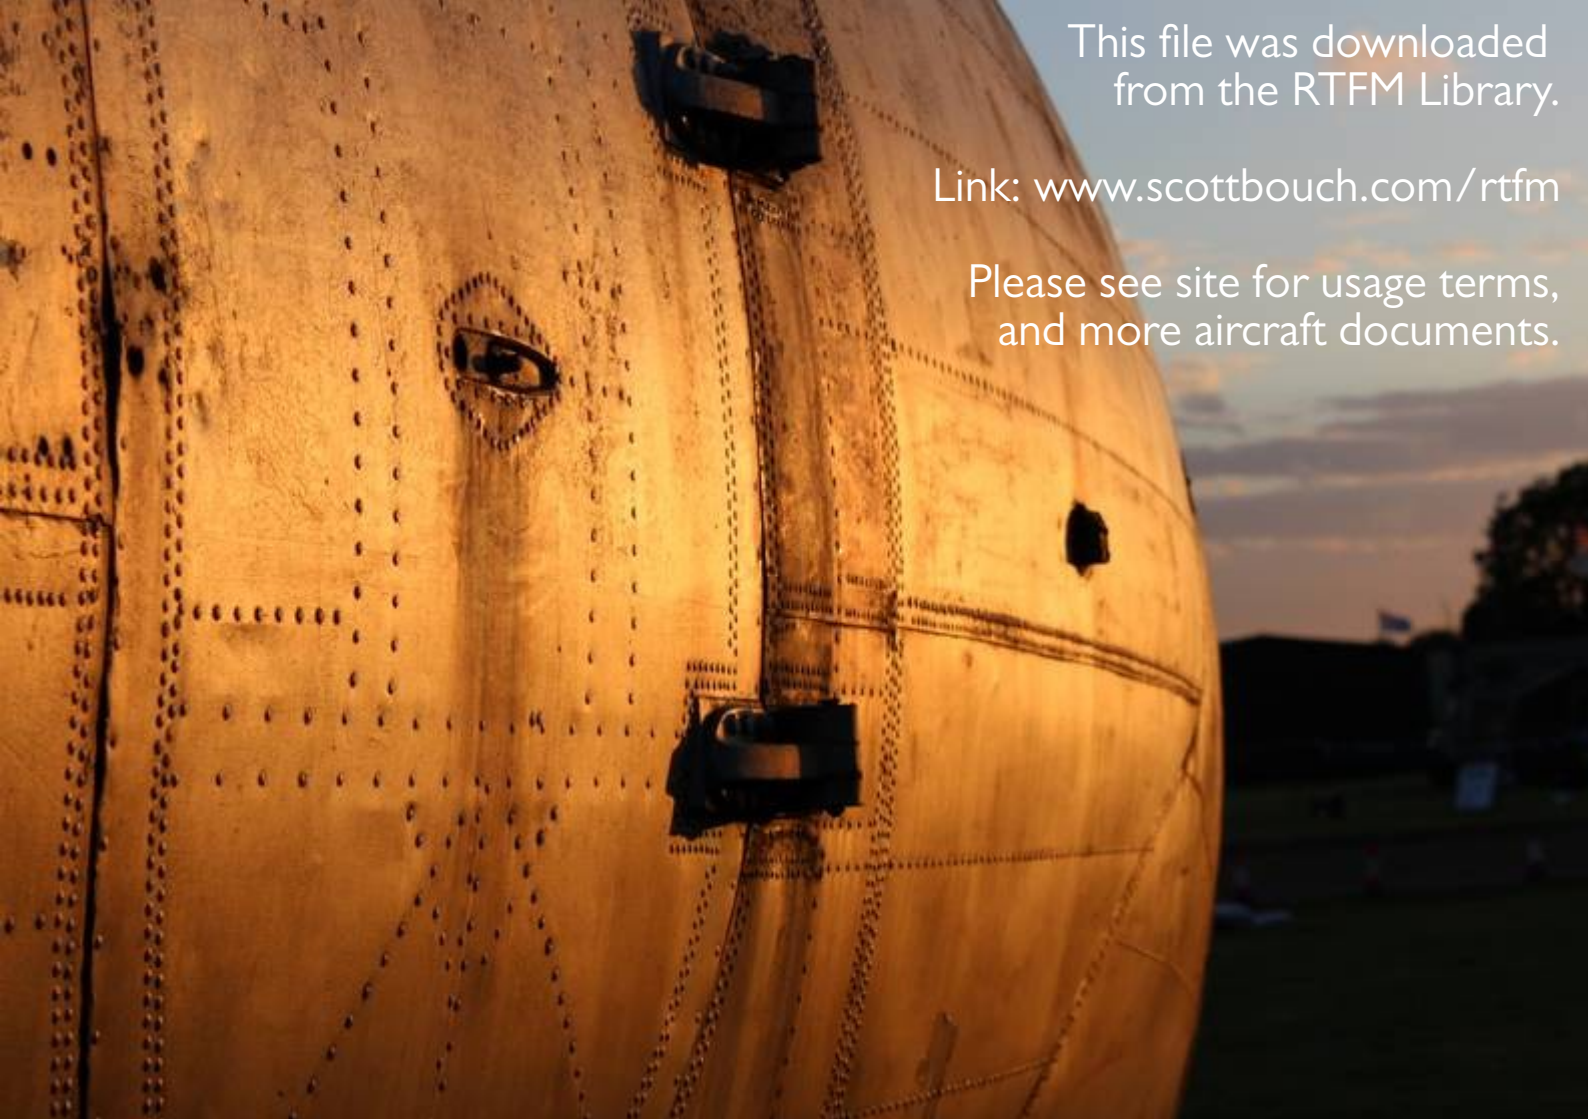

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.