


SERVICES — PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Store	Place No.
	D.190124	PILOT'S ANTI "G" INSTALLATION ASSEMBLY	—	—		
	861 F.188884	Angle, mounting, anti "G" valve	1	DTD.610	C.	NK.1
	862 F.188882	Angle, mounting, anti "G" valve	1	DTD.610	C.	NK.1
	863 F.190229	Bolt, special, connecting air bottle straps	2	S.95.B	C.	NK.1
	447 F.186436	Bolt, special, strap clamping	2	S.95.B	C.	NK.1
10	27VA/4619941 Dunlop	Bottle, air, spherical	2	—	A.	
	ACM.16782					
10	864 F.190220	Clip, mounting, reducing valve	1	S.510	C.	NK.1
10	865 Std.1178/3	Clip, mounting, reducing valve	1	S.510	C.	4
				& T.26		
	4667 Std.850/28	Clip, securing earth connectors	2	—	C.	4
	Std.2045/29/22	Clip, sleeved	2	—		6
	Std.2046/29/22	Clip, sleeved	1	—		6
	Std.2045/17/26	Clip, sleeved	1	—		6
	4667 Std.850/28	Clip, securing pipes, 7/16" wide x 22 S.W.G.	2	DTD.610	MR/C	4
		x 2.8" long				
	3774 Std.1306/N20	Coupling, flexible, 5/8" i/d x 2.0" long	4	DTD.625A or F.67	MR/C	4
10	4276 Std.1306/N38	Coupling, flexible, 5/8" i/d x 3.8" long	1	DTD.625A or F.67	MR/C	4
	1707 A.193653	Elbow, at cockpit shelf side wall	1	L.54 or T.9	C.	
10	27VA/9006816 Dunlop	Filter	1	—	A.	
	ACO.7273					
10	6A/4333066 —	Gauge, pressure Mk. 14.KK	1	—	A.	
	2851 DAS.412/E/12.5	Hose, kink proof (Dunlop DP.10124/1)	1	—	C.	
10	6A/1037413 —	Label, air	1	—	C.	
	† A.190201/1	Pipe, 4-way piece to non-return valve	1	DTD.323		
	† A.190201/2	Pipe, non-return valve to air bottle	1	DTD.323		
	† A.190201/3	Pipe, air bottle to air bottle	1	DTD.323		
	† A.190201/4	Pipe, air bottle to filter	1	DTD.323		
	1948 A.190201/5	Pipe, filter to tee-piece	1	DTD.323	C.	
	† A.190201/6	Pipe, tee-piece to selector valve	1	DTD.323		
	† A.190201/7	Pipe, selector to reducing valve	1	DTD.323		
	† A.190201/8	Pipe, tee-piece to gauge	1	DTD.323		
	† A.193654/1	Pipe, anti "G" valve to connection	1	L.54 or T.9		
	† A.193654/2	Pipe, connection	1	L.54 or T.9		
	† A.193654/3	Pipe, connection to elbow	1	L.54 or T.9		
	3839 Std.1606/44/B16	Screw, securing elbow, 4 B.A. x 1/2" long	3	Brass	MR/C	5
	1720 Std.1606/4/B24	Screw, securing pressure gauge	4	—	C.	5
10	27VA/2224239 Dunlop	Socket, quick release	1	—	A.	
	ACO.6580					
	866 F.189989	Strap	2	DTD.166	C.	NK.1
	867 F.189991	Strap, air bottle	4	DTD.166	C.	NK.1
	868 F.190003	Strap, air bottle	2	DTD.166	C.	NK.1
	3787 Std.1507/23/035	Tube, distance, 5/16" o/d x 17 S.W.G. x .35" long	2	T.26	MR/C	4
		(Make from 30A/9610295)				
	3808 Std.1509/23/040	Tube, distance, 3/8" o/d x 17 S.W.G. x .4" long	2	T.4	MR/C	4
	3802 Std.1509/23/085	Tube, distance, for clip securing pipe, 3/8" o/d x 17	1	T.4	MR/C	4
		S.W.G. x .85" long				
	869 F.140778	Union, reducing	1	L.1	C.	
10	27VB/4495776 Hymatic AG2	Valve, anti "G"	1	—	A.	
10	27Q/4117446 Dowty	Valve, non-return (Mod. 447)	1	—	A.	
	D.5213Y					
10	27VC/4607575 Palmer C.58	Valve, reducing	1	—	A.	
10	27VB/4497626 Hymatic SV.9	Valve, selector	1	—	A.	
	870 Std.915/B/18	Washer	6	DTD.610	C.	4

† For details see Piping Chart

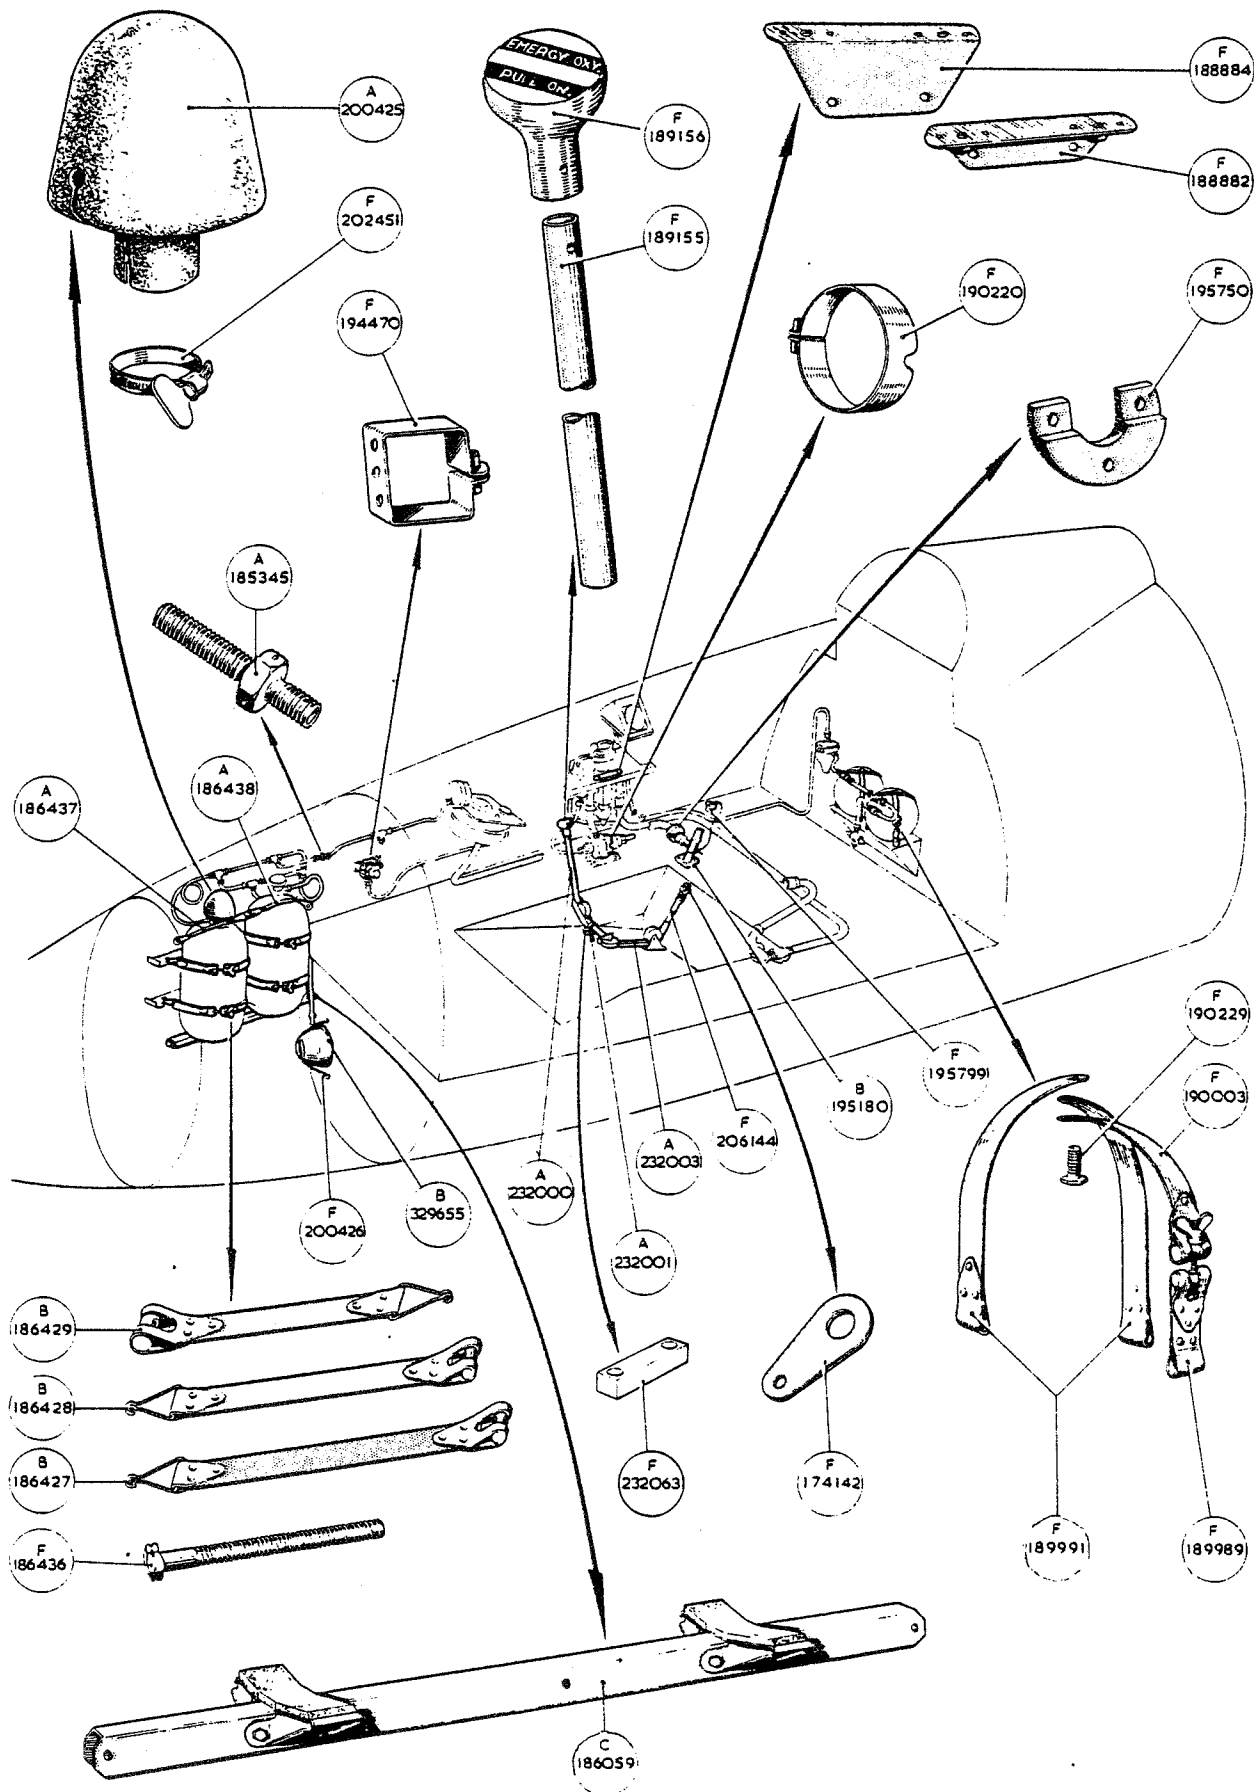

ANTI 'G' & OXYGEN INSTALLATION

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

