

Group 5

MISCELLANEOUS INSTRUMENTS

(Completely revised)

LIST OF CONTENTS

	Para.
Introduction	1
DESCRIPTION AND OPERATION	
<i>Air temperature thermometers</i>	
General... ..	3
Outside air temperature	4
Bomb bay temperature	6
De-icing temperature	9
Hydraulic pressure gauge	12
Pilots' indicator... ..	13
Pressure transmitter	14
Brake pressure warning indicators	16
Air conditioning indicators	19
Mass air flow indicator	20
Nitrogen system	22
Nitrogen master valves	24
Control switches... ..	25
Nitrogen pressure gauges	26
Fuel pressure gauge (Mod.824)	29
Periscopic sextants	30

	Para.
Rearward viewing periscope	34
Oxygen system	39
Air pressure gauges	40
Accumulator air pressure gauges	41
Emergency air gauges	43
Pressure gauges - entrance	
door system	45
Pressure gauges - H2S scanner	
system... ..	47
Nitrogen cylinder pressure gauges	50
Brakes dual pressure gauges	51
V.G. recorder... ..	53
Vicker's 4-way cock	55
Indicating accelerometer	56
Cabin altimeter	60
Aircraft clock... ..	61
Fatigue meter (Mod.374)	62
Fatigue meter (Mod.912)	63
Airspeed pressure switch	64

	Para.
Brake pressure warning switches	69
Mass air flow indicator	70
Nitrogen system	72
Pressure gauges... ..	73
Periscopic sextants	74
Rearward viewing periscope	75
Direct reading pressure gauges	77
Brakes dual pressure gauges	79
V.G. recorder	80
Indicating accelerometer	81
Cabin altimeter	82
Aircraft clock... ..	83

SERVICING

Air temperature thermometers	66
Hydraulic pressure gauge	68

REMOVAL OF COMPONENTS

General	87
Components in pressure lines	88
Wing de-icing temperature bulbs	89
Mass air flow transmitters	91
Periscopic sextant mountings	92
Rearward viewing periscope	93

LIST OF ILLUSTRATIONS

	Fig.		Fig.
Location of miscellaneous instruments	1	Hydraulic pressure gauge (post Mod.206 and 260)	7
Routing charts		Brake pressure warning indicators (pre.Mod.206)	8
Outside air temperature	2	Mass air flow indicator... ..	9
Bomb bay temperature	3	Nitrogen pressure gauges	10
De-icing ducts temperature	4	Heaters for rearward viewing periscope	11
Hydraulic pressure gauge	5	Fatigue meter	12
Hydraulic pressure gauge (pre.Mod.260, post Mod.206)	6		

RESTRICTED

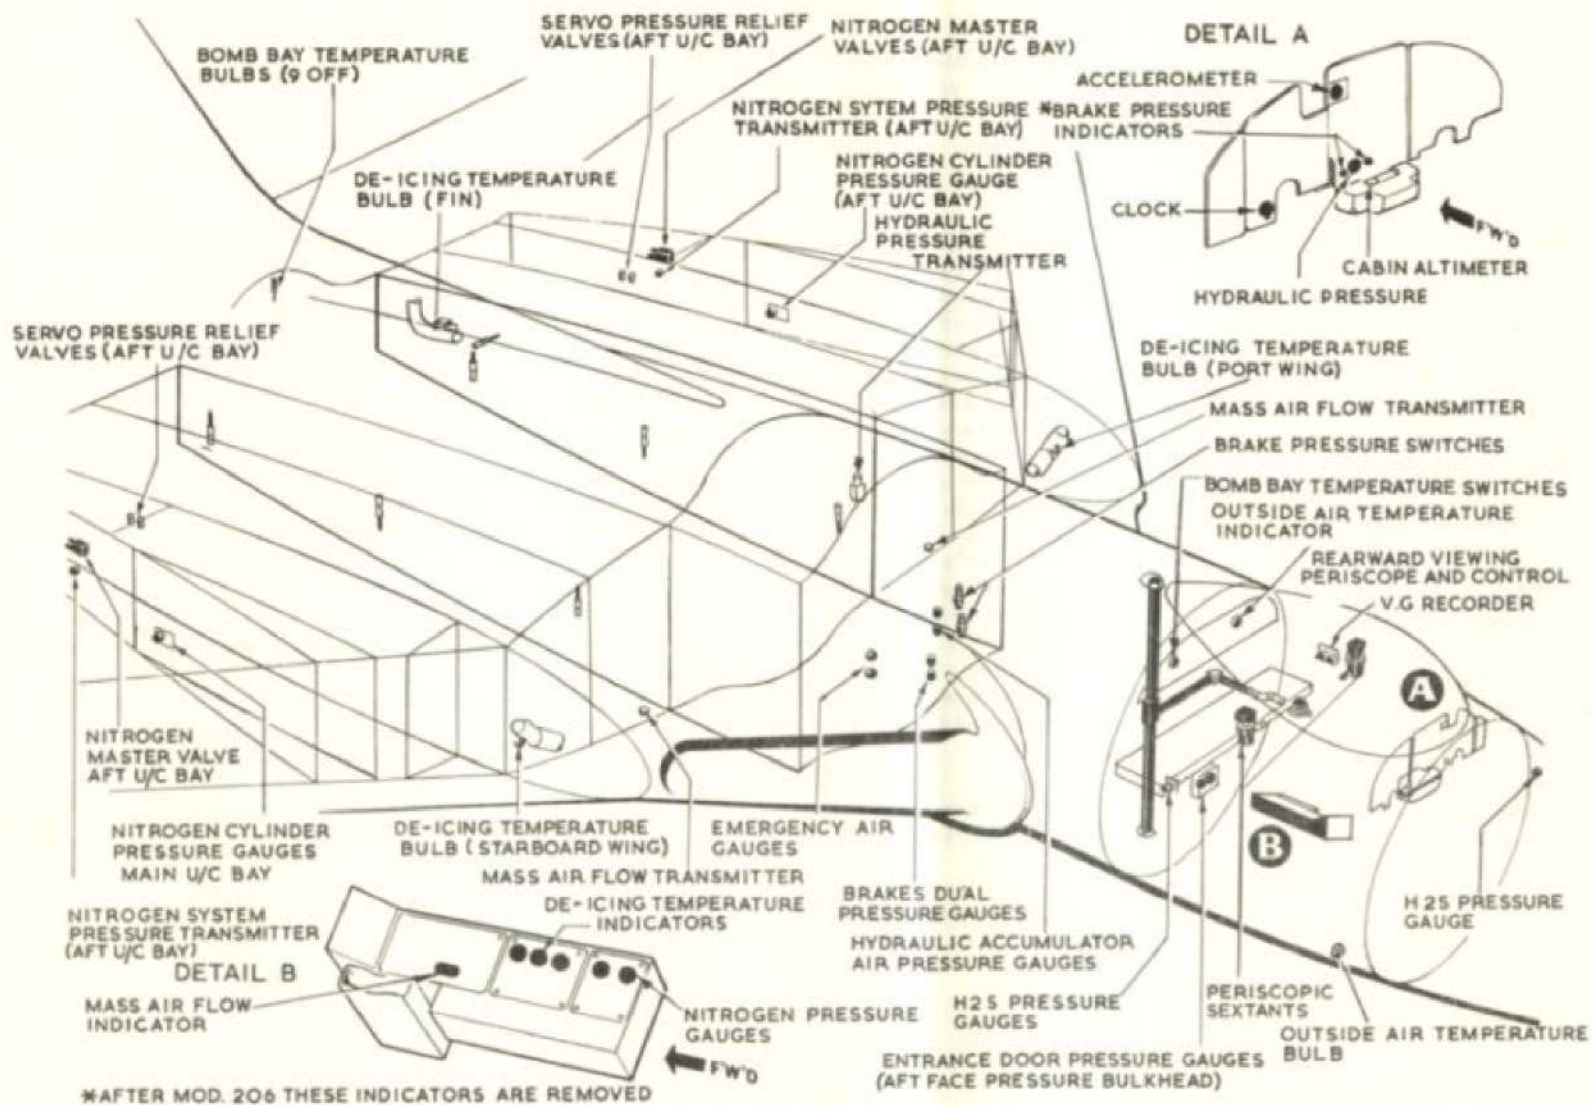


Fig. I. Location of miscellaneous Instruments

RESTRICTED

Introduction

1. This group contains descriptive and servicing information for miscellaneous instruments which are additional to the main instrument services.

2. A location illustration for all miscellaneous instruments is contained in fig.1, and the necessary routing charts for the electrical instruments are supplied at the end of the text. Reference is made

throughout the description to the relevant Air Publication where more detailed information on individual instruments will be found.

DESCRIPTION AND OPERATION**Air temperature thermometers***General*

3. Sangamo Weston type air temperature thermometers are used to measure the temperature of the outside air, the bomb bay, and the leading edge de-icing ducts. This type of thermometer is designed for the accurate measurement of air temperatures over a wide range of speeds and varying atmospheric conditions, and consists of a temperature sensitive resistance bulb and connecting cable used in conjunction with a ratiometer indicator. A full description of the Sangamo Weston thermometers, including the principles of operation will be found in A.P.1275A, Vol.1, Sect.4, Chap.6.

Outside air temperature

4. The resistance bulb, Type S110G-14-93, for the outside air temperature is situated outside the cabin on the starboard side. It is attached to a round reinforcing plate which fits flush with the aircraft skin. The bulb is equipped with a small 2-pin plug which accommodates a socket on the associated duprensheath connecting cable. A coupling nut on the cable secures the electrical connection.

5. The indicator, Type S63-4-400, is installed on the plotter's instrument panel, and carries a scale calibrated in deg.C, -70 to +30. A 28-volt d.c. supply is con-

ected to the indicator from fuse 179 in the starboard fuse and relay panel (4P). A routing chart of the circuit is contained in fig.2.

Bomb bay temperature

6. Nine resistance bulbs, Type S110G-4 are fitted to brackets mounted clear of the structure along the inner sides and roof of the bomb bay. The clamping nuts securing the bulbs are wirelocked to the brackets, and terminal blocks are provided near the bulbs for the associated connecting cables.

7. It will be seen from fig.3 that the resistance bulbs are connected in a series parallel arrangement. In this way the over-all resistance value of the elements in the circuit is equivalent to that of one bulb. This arrangement permits the measurement of the average air temperature of the bomb bay. The location for the bulbs is given in fig.1.

8. The bomb bay temperature indicator is fitted on the navigator's radar panel. This indicator Type S62-5-128, is calibrated from -15 to +25 deg.C, and the circuit is fed from fuse 136 in (4P). When Mod.217 is introduced, the indicator will be replaced by a Type S63-5-668, which has a scale range from -50 to +50 deg.C.

De-icing temperature

9. Three resistance bulbs, Type S110-

3, are installed, one in each hot air duct for the port, starboard and fin leading edges. The wing temperature bulbs are located in the air duct immediately outboard of each air intake, the one for the fin is located in the duct as it passes from the bomb bay into the fin between bomb arches 225.227 and 243.127. The normal duprensheath connecting cables are provided and the bulbs are wirelocked in position.

10. The associated indicators, Type S63-4, are fitted on the anti-icing control panel on the starboard console (7P). These indicators show the temperature of the de-icing airflow to the aircraft leading edges, and are calibrated from 0 to 200 deg.C. The three circuits are individually fused from the starboard fuse and relay panel (4P). A routing chart is contained in fig.4.

11. The thermometers form part of the de-icing system controls described in Chap.1, Group 8 of this section.

Hydraulic pressure gauge

12. A Sangamo Weston type hydraulic pressure gauge is installed. This instrument combines the function of a pressure transmitter and a ratiometer indicator, and provides continuous indication of the aircraft hydraulic pressure during flight. A full description of the pressure gauge will be found in A.P.1275A, Vol.1, Sect.3. The hydraulic system is dealt with in Book 1, Sect.3, Chap.6 of this publication.

RESTRICTED

Pilots' indicator

13. The hydraulic pressure indicator, Type S63-4, is fitted on the pilots' centre panel, and is calibrated up to 6,000 lb. per sq.in. The circuit is fed from fuse 95 in the port fuse and relay panel (3P). On the introduction of Mod.206, the indicator will be replaced by one, Type S214-1-11. This later type of instrument also incorporates two similar indicators for brake pressure.

Pressure transmitter

14. The pressure transmitter, Type S122-4, is mounted on the port side of the bomb bay near to the front spar. The electrical connection is made by a trip-sheath cable supplied with the transmitter, and provided with a socket to accommodate the small 3-pin plug on the unit.

15. The transmitter is directly coupled to the hydraulic supply pipe. Any change of pressure in the hydraulic fluid will produce a variation in the resistance within the transmitter. A change in the circuit current is thus effected and the pilot's instrument will register accordingly. The electrical circuit routing chart is contained in fig.5.

Brake pressure warning indicators

16. Warning of low hydraulic pressure in the brake accumulators is given by two magnetic indicators, operated by two pressure switches in the hydraulic circuit. The indicators (Ref.No. 5CZ/5074) are fitted on the pilots' centre panel and will be energised as long as the pressure in each accumulator is within the normal operating limit.

17. The pressure switches, Dowty Type C1829Y, Mk.17, are mounted adjacent to the accumulators on the hydraulic panel in the nose wheel bay. These switches are designed to operate at a rising pressure of 3,000 lb. per sq.in. \pm 50. Should the pressure in the accumulators fall below this figure, the switch contacts

will open and the pilots' indicators will be de-energised to give warning of this condition. A routing chart of the circuit is provided in fig.6, and the hydraulic brake system is described in Book 1, Sect.3, Chap.6 of this publication.

18. With the introduction of Mod.206 a triple gauge system will replace the present brake pressure warning indicators and the hydraulic pressure gauge (para.13).

Air conditioning indicators

19. Three Desynn indicators form part of the cabin air conditioning controls and are located on the panel labelled, CABIN HEAT AND PRESSURE CONTROL, on the starboard console. Information on the two indicators marked CABIN TEMP. VALVE and RAM AIR VALVE is given in Chap.1, Group 8 of this section, which describes the air conditioning controls and includes the necessary circuit routing charts. The remaining indicator marked AIR FLOW is dealt with in the following paragraphs.

Mass air flow indicator

20. Indication of the mass air flow to the cabin is given by a twin Desynn indicator, Smith Type S25 FL. Two position transmitters, Type C, control the indicator movements and are situated, one under each engine air intake. The transmitters are mechanically linked to the mass air flow modulators, which are operated by the associated switches on the control panel.

21. Movement of the modulator valves to the open or shut position is transmitted to the indicator, which registers this condition on two scales graduated from minimum to maximum air flow. Fuses for the circuit are contained in the 28 volt distribution panel (16P) in the nose wheel bay; the routing chart is provided in fig.7. For detailed information on the indicator and position transmitters, reference should be made to A.P.1275A, Vol.1, Sect.1, Chap.12.

Nitrogen system

22. The nitrogen system is installed to pressurise the aircraft fuel tanks, and comprises two separate installations, one for the fuel tanks on the port side of the aircraft, and one for the starboard tanks. Nitrogen pressure is used to lessen the fire hazard which always exists in a mixture of fuel and air.

23. The nitrogen system is fully described in Book 1, Sect.4, Chap.6, of this publication which also includes illustrated diagrams. The electrical controls for the nitrogen master valves, the servo pressure relief valves are described in Book 2, Sect.5, Chap.1, Group 5A.

Nitrogen master valves

24. Two nitrogen master valves are fitted, one adjacent to each bank of nitrogen cylinders in the aft compartment of the main wheel bays. The valves are connected in the main nitrogen feed lines and each unit consists of a Dunlop valve, Type SK.25101, operated by a Plessey Panther actuator, Type CZ.54709. Selection of the valves to the open or close positions is made from the pilots' control switches. Further information on the Dunlop valves will be found in the appropriate volume of A.P.4303 series; the actuators are dealt with in A.P.4343D, Vol. 1, Sect.16.

Control switches

25. Controls for the electrically operated valves are provided by three 2-position switches fitted on the nitrogen pressure panel on the starboard console. These switches are linked together for combined operation, and when placed to the OPEN (up) position will open the nitrogen master valves and close the servo pressure relief valves. A routing chart of the circuit is contained in Book 2, Sect.5, Chap.1, Group 5A.

Nitrogen pressure gauges

26. Two Desynn indicators, Smith Type 379 PG, are fitted on the nitrogen

pressure panel on the starboard console. The indicators provide the pilots with a reading of the pressure from each bank of nitrogen cylinders, and are calibrated from 0 to 2,000 lb. per sq.in.

27. Operation of the indicators is effected by two pressure transmitters, Smith Type 365 PG. The transmitters are connected, one in the main pressure line of each nitrogen installation, and are attached to resilient mountings adjacent to the master valves in the aft main wheel bays. The circuit is fed from fuses in the 28-volt distribution panel (16P) in the nose wheel bay, and the indicators give continuous reading when the aircraft supply is switched on.

28. Further information on the nitrogen pressure gauges will be found in A.P.1275A, Vol.1, Sect.3, Chap.31. A routing chart of the circuit is contained in fig.9.

Fuel pressure gauge (Mod.824)

29. With the introduction of Mod.824 a Sangamo Weston fuel pressure gauge (Ref. No.6A/6173) fitted on the starboard console gives indication of fuel pressure in the flight refuelling pipe line. A Sangamo Weston pressure transmitter (Ref.No.6A/3732) fitted to the starboard side of frame 470E (flight refuelling branch pipe A.V. Part No. 60/P3180) operates the indicator. A routing chart is contained in Book 2, Sect.5, Chap.1, Group 5A.

Periscopic sextants

30. Mountings are provided in the cabin for the installation of two Mk.2 periscopic sextants, one port and one starboard. These instruments, when fitted, are used to measure the altitude of astral bodies for navigational purposes.

31. Each mounting, Mk.1B, is fitted to a fairing on the upper skin and is secured from the outside by eight countersunk screws. A connector plate on each assembly makes the necessary electrical connections to the aircraft 28-volt d.c.

supply, and also carries a control switch. These switches should be left in the ON position since additional control switches, which are more readily accessible, are provided, one on (3P) and (4P) respectively.

32. Supplies to the periscopic sextants are fed from a flat type plug adaptor on the connector plate of each mounting, and are taken via another plug positioned close to the mounting structure. When the appropriate aircraft control switch is ON, a heating element integral with each mounting is brought into circuit, and a supply is made to the periscopic sextant.

33. A routing chart of the electrical supplies is provided in Sect.5, Chap.1, Group 8, and a full description of the periscopic sextant Mk.2, along with mounting Mk.1B, will be found in A.P.1275B, Vol.1, Sect.5, Chap.1.

Rearward viewing periscope

34. A Kelvin Hughes periscope, Type KPG 0401, is installed in the cabin, near the rear pressure bulkhead, for the use of the navigator. The periscope is designed for outside rearward viewing and is mounted vertically, the tube extending between the cabin floor and roof. A periscope head at each end of the tube enables viewing to be made from above or below the aircraft as required, and a rotatable reflecting mirror within each head provides a vision angle of 110 deg.

35. The eyepiece assembly projects from the centre section of the periscope to a suitable position on the navigator's table. The eyepiece holder is hinged to the main assembly and conveniently telescopes. In this manner, the eyepiece can be stowed in a recess provided in the table when the instrument is not in use.

36. Movement of the reflecting mirrors is effected by a teleflex control. The operating cables are connected from a

control handle fitted on the underside of the navigator's table to each head and centre section of the instrument. To use the periscope by viewing from the top head or bottom head, the handle must be selected up or down accordingly; movement of the handle in a lateral direction gives sweep to the angle of vision in each case.

37. A 50-watt heating element is embodied within each head for demisting purposes. The heaters are connected in series and supply for these is taken from No.3 inverter at 115 volts, 1600 c/s a.c. Fuse 740 in the a.c. supplies panel (11P) supplies the circuit, a routing chart of which is contained in fig.10.

38. Reference should be made to A.P. 1275B, Vol.1, where a full description of each part of the periscope will be found, including the principle of operation.

SEE SECTION 17 FOR PUBLICATION

Oxygen system

39. Descriptive and servicing information for the oxygen system is contained in Book 1, Sect.3, Chap.10 of this publication. More detailed information on the components in the system will be found in A.P.1275G, Vol.1.

Air pressure gauges

40. The air pressure gauges described in the following paragraphs are integral with the hydraulic and pneumatic systems described in Book 1, Sect.3. Reference is made to the appropriate chapters where information on the systems employing the gauges will be found.

Accumulator air pressure gauges

41. Two Mk.14 LL pressure gauges labelled, BRAKES ACCUMULATOR PNEUMATIC CHARGE, are fitted on the hydraulic panel in the nose wheel bay.

42. Each gauge is calibrated from 0 to

4,000 lb. per sq.in. and provides indication of the air pressure within its associated accumulator. The accumulators are charged with air at 2,550 lb. per sq.in. which is further increased to 4,000 lb. per sq.in. from the hydraulic pressure line. A description of the system is given in Sect.3, Chap.6. Information on the gauges is contained in A.P.1275A, Vol.1, Sect.3, Chap.7.

Emergency air gauges

43. Fitted on an air charging panel on the starboard side of the nose wheel bay, adjacent to the accumulator pressure gauges, are two other Mk.14 LL pressure gauges. These instruments register the pressures of two emergency air supplies for the alighting gear, one for the main wheel units and one for the nose wheel unit. The gauges are labelled accordingly.

44. The air supplies are obtained from two cylinders in the nose wheel bay which are charged at 3,000 lb. per sq.in. The system is described in Sect.3, Chap.6.

Pressure gauges - entrance door system

45. Two storage cylinders, mounted below the crew's floor on the port side of the cabin, provide the air supplies for the entrance door system. The cylinders are charged at 2,000 lb. per sq.in. and the pressures recorded on two gauges, Mk. 14 KK, fitted in an air charging panel at the rear pressure bulkhead on the nose wheel bay. This type of instrument carries a scale calibrated 0 to 3,000 lb. per sq.in.

46. A full description of the entrance door system is contained in Sect.3, Chap. 7. The gauges are dealt with in A.P. 1275A, Vol.1, Sect.3, Chap.7.

Pressure gauges - H2S scanner system

47. A Mk.14H pressure gauge is fitted to an air charging panel inside the nose of the aircraft. The charging panel can be seen when the access panel for the emergency equipment on the port side of

the nose is removed, and it is used to charge a cylinder immediately above this position. Air is stored in the cylinder at 1,800 lb. per sq.in. and is used to supply the H2S scanner system. The gauge, which indicates the pressure of the air supply, is calibrated up to 2,000 lb. per sq.in.

48. The air passes through a pressure reducing valve, an electromatic tap, and a regulator, to be fed to the H2S equipment at a controlled pressure of 15 lb. per sq.in. absolute. This pressure is shown by a pressure gauge, Type K.B. 554/03, fitted at the starboard side of the navigation station. The scale on the gauge is calibrated from -10 to +20 lb. per sq.in.

49. The H2S scanner system is described in Sec.3, Chap.7. Information on the two pressure gauges will be found in A.P.1275A, Vol.1, Sect.3.

Nitrogen cylinder pressure gauges

50. Two pressure gauges, Mk.14H, provide indication of cylinder pressure for the port and starboard nitrogen installations. The gauges are fitted on the respective nitrogen charging panels which are installed one on the forward, outboard side of each main wheel bay. Nitrogen is stored in the cylinders for each installation at 1,800 lb. per sq.in.; the system is fully described in Sect.4, Chap. 6. Detailed information on the gauges will be found in A.P.1275A, Vol.1, Sect.3, Chap.7.

Brakes dual pressure gauges

51. Two dual pressure gauges, Dunlop Type AHO.29130, are mounted at the bottom of the hydraulic panel in the nose wheel bay. These gauges are connected, one in each hydraulic accumulator supply line, to the port and starboard main wheel brakes and are calibrated to read 0 to 3,000 lb. per sq.in.

52. The brakes have a normal working

pressure of 2,500 lb. per sq.in., and are operated from the brake foot motors mounted one on each rudder pedal. Indication is given on the gauges of the applied brake pressures when the foot motors are operated. Information on the wheel brakes systems is contained in Sect.3, Chap.6. A description of the gauges will be found in A.P.1275A, Vol.1, Sect.3, Chap.16.

V.G. recorder

53. An attachment bracket on the port side of the cabin near the navigator's position provides for the installation of a V.G. recorder. When fitted, this instrument is fed from the pitot-static system, and during flight, automatically draws a graph of aircraft acceleration against air-speed.

54. The recorder consists of a moving-weight accelerometer and an air speed capsule. The resultant movement of these mechanisms is transmitted by a stylus on to a chalked glass slide carried within the slide cap on the face of the instrument. A complete description of the V.G. recorder is contained in an instruction leaflet No. I.T.2031 (issue 2) which bears the title, Routine Measurement of Flight Acceleration, and is published by the Ministry of Supply.

Vicker's 4-way cock

55. Mounted beside the V.G. recorder is a Vickers 4-way cock, Type D1885, which connects the instrument to the starboard pitot-static system. Flexible rubber tubing with clips, Type A.G.S. 606 Mk.D are used to link the pipe connections. When the recorder is required for use the cock should be turned to ON. Note that when the recorder is not fitted, the cock lever should be wirelocked in the OFF position to ensure that the pressure and static lines remain closed.

Indicating accelerometer

56. An indicating accelerometer, Type B6, is fitted on a bracket between the



This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.