

Chapter 2-2-2
PARTS LIST
COUPLER, ANTENNA
5821-99-957-2082

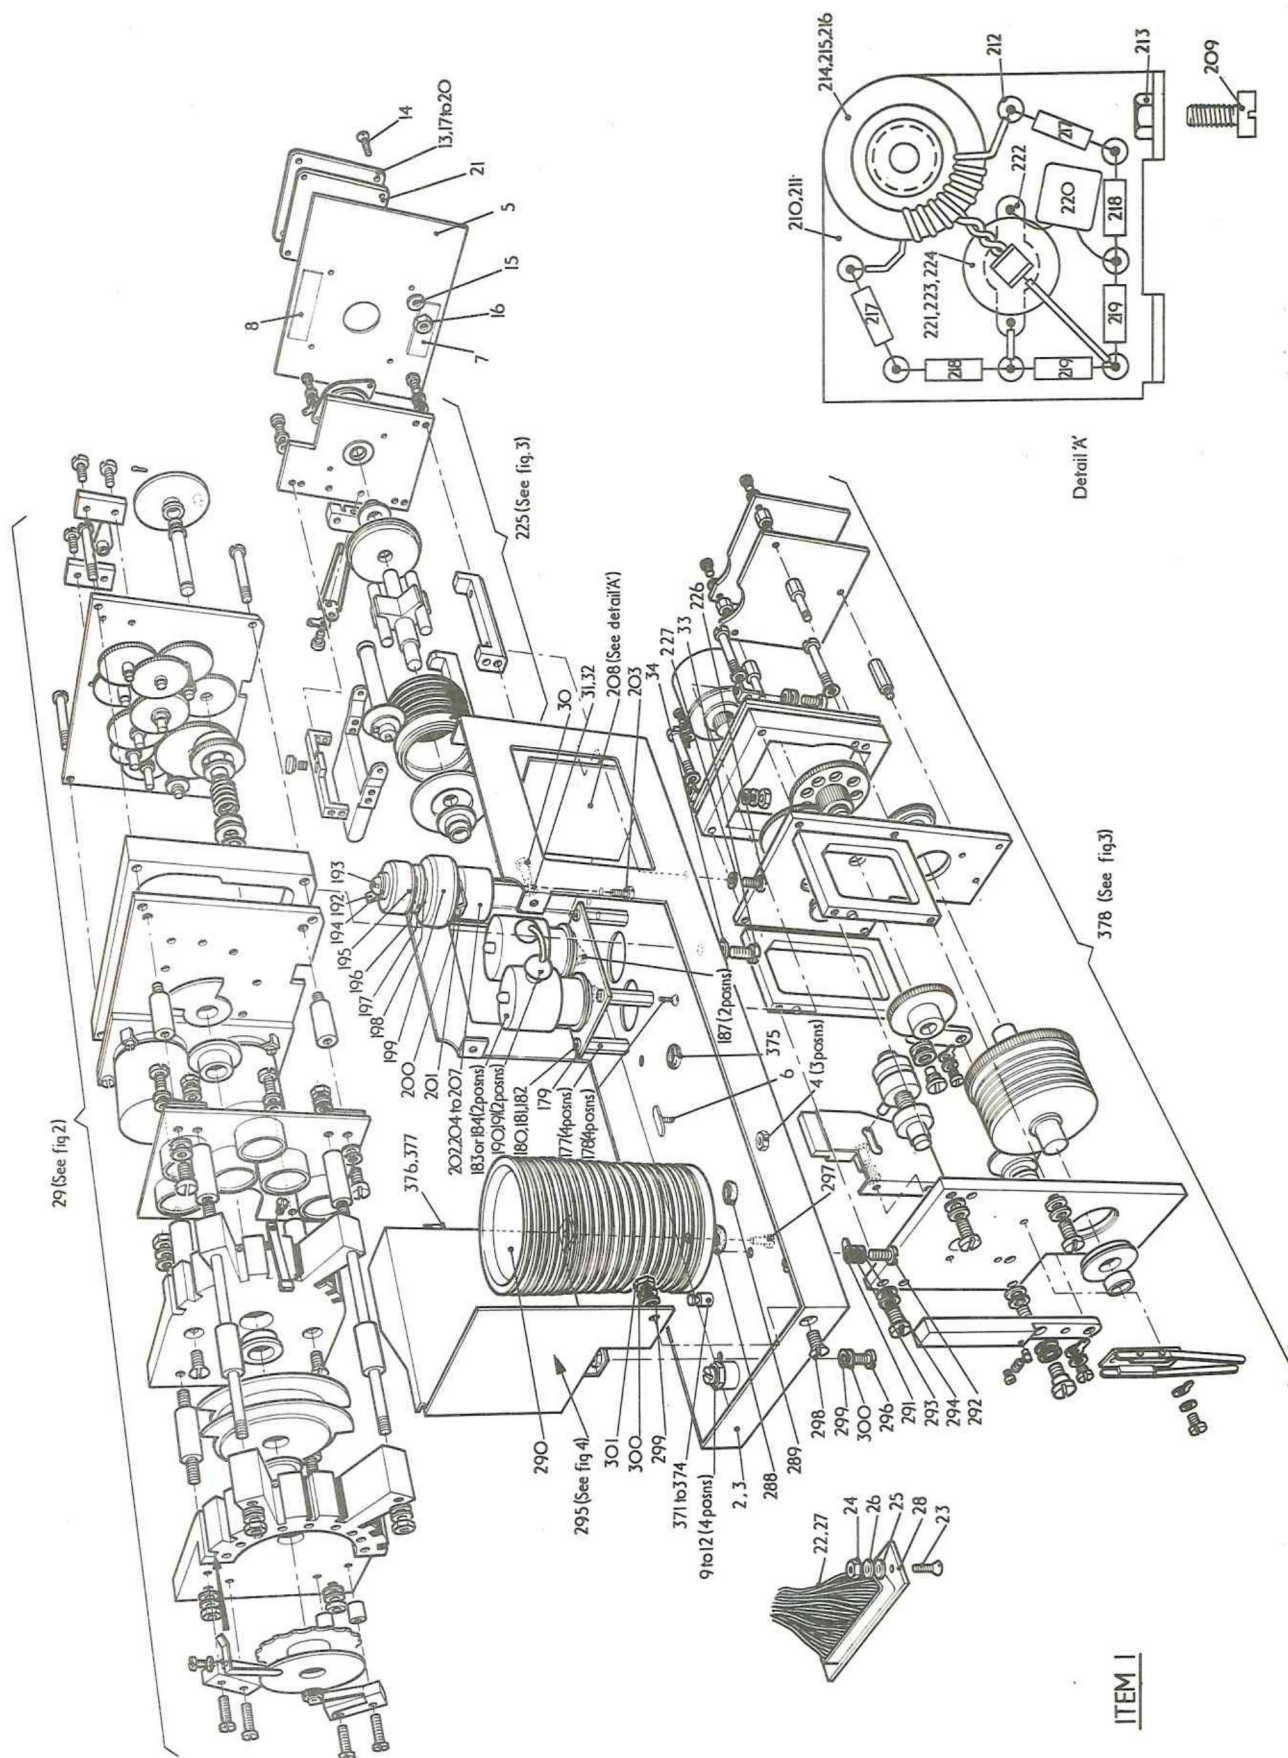


FIG. I, COUPLER, ANTENNA

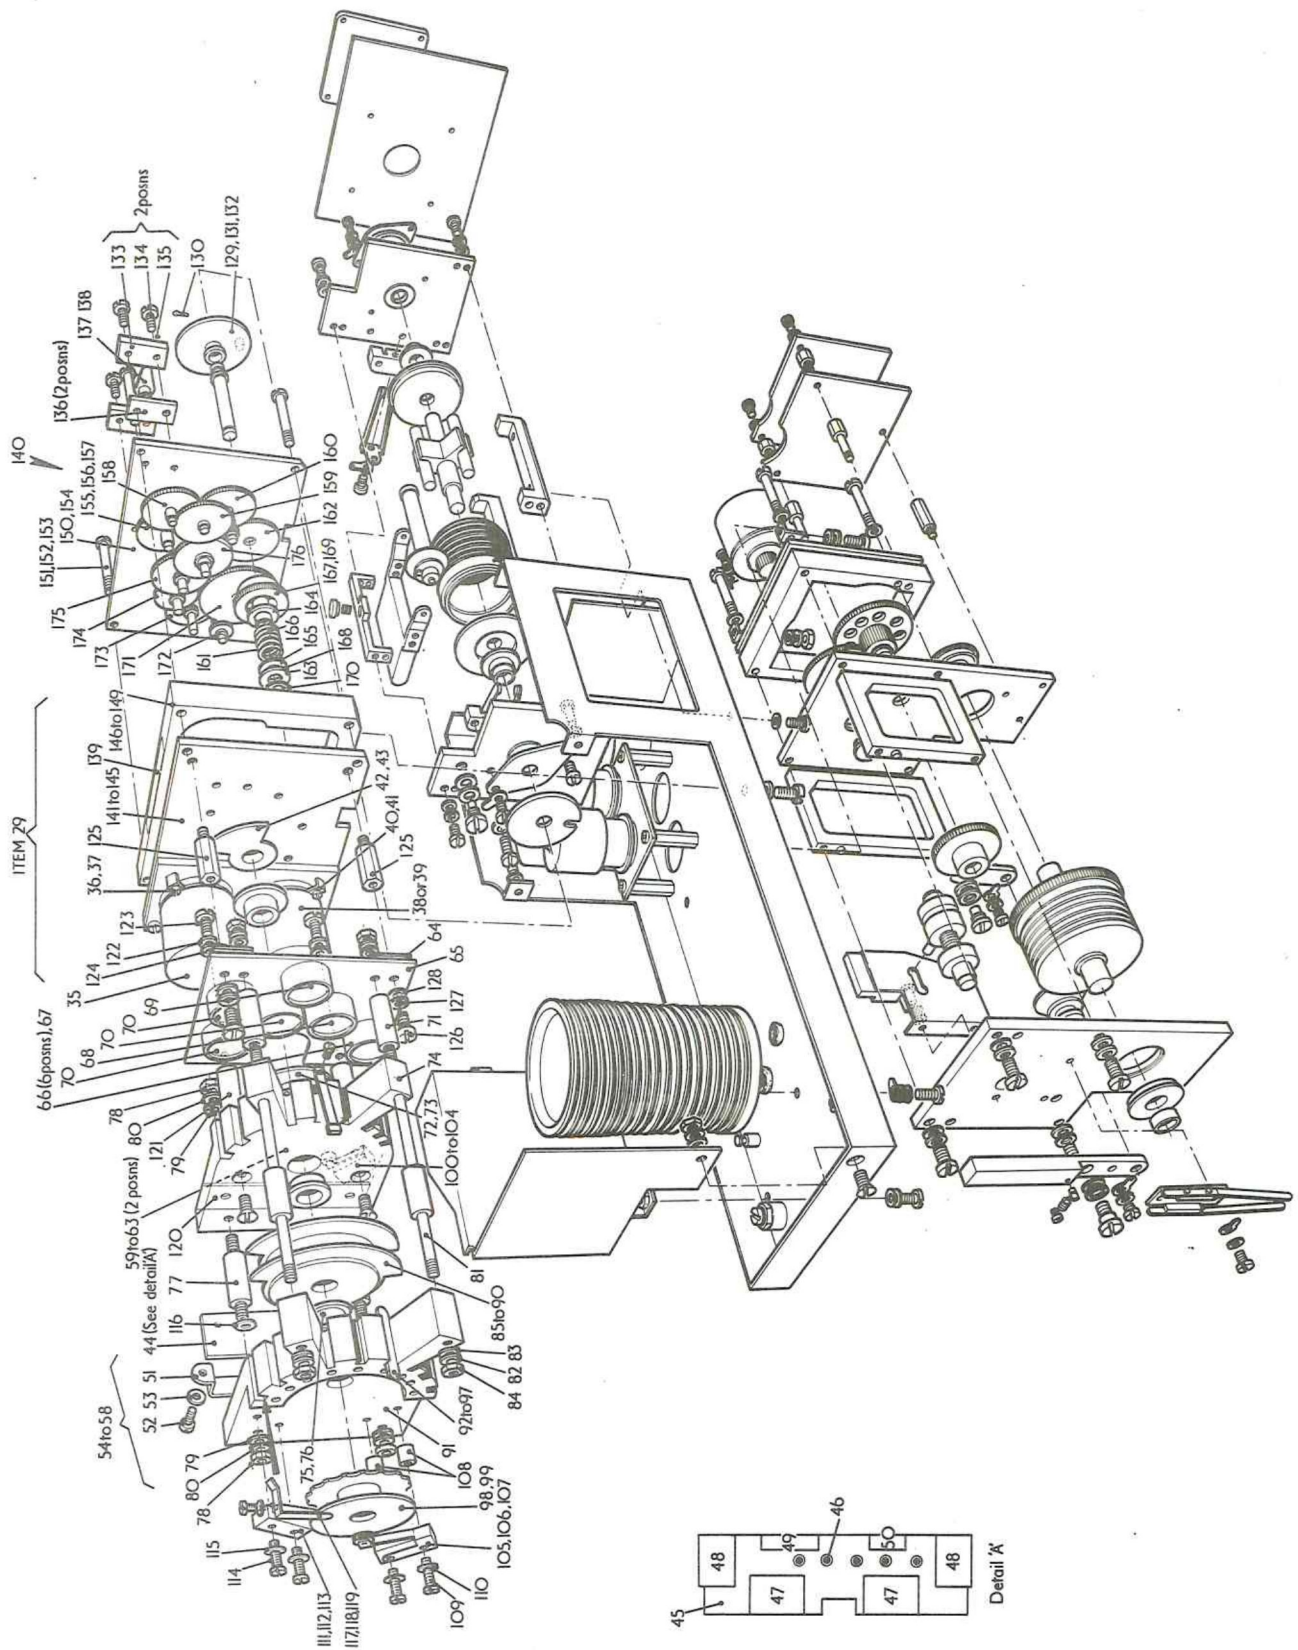


FIG.2, COUPLER,ANTENNA


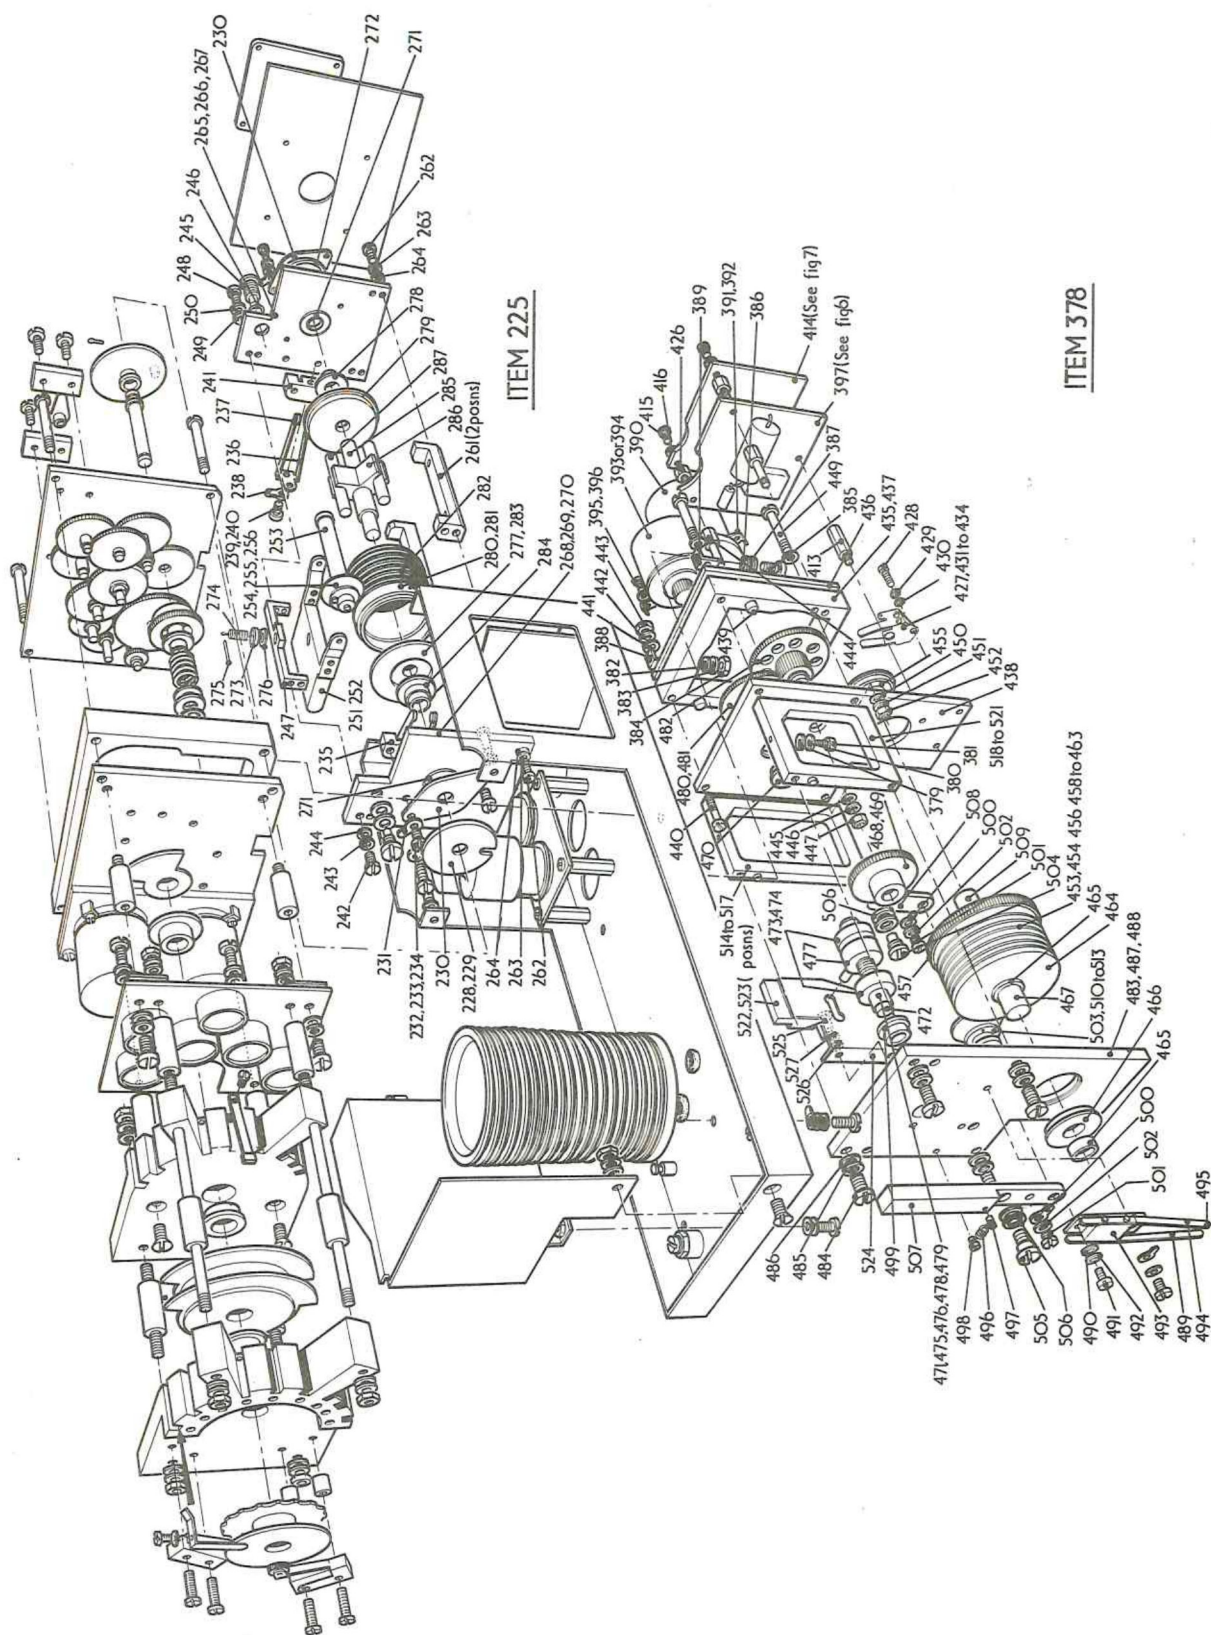


FIG.3, COUPLER,ANTENNA

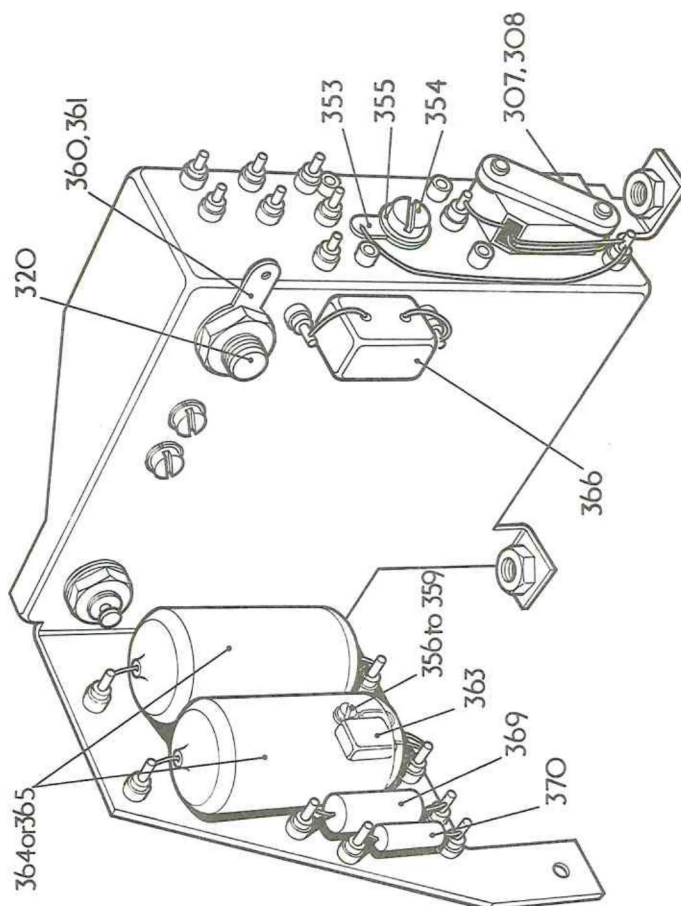

ITEM 295




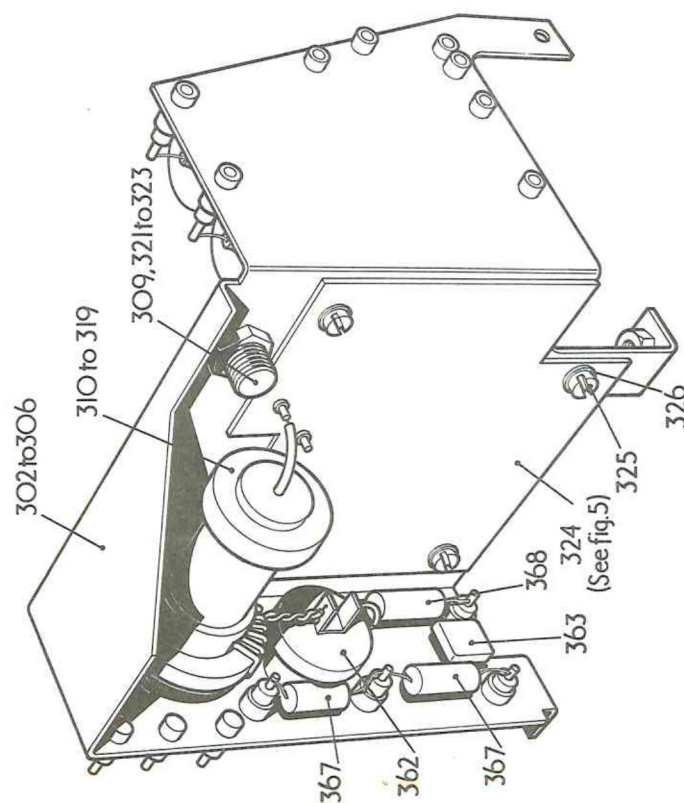


FIG.4, COUPLER, ANTENNA

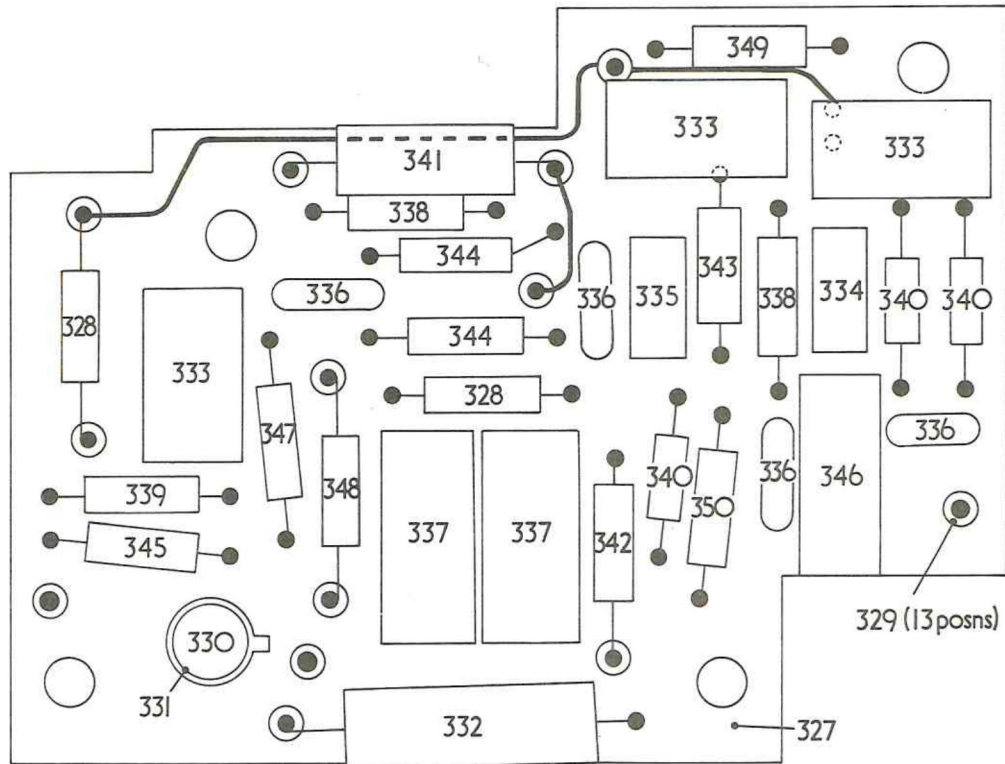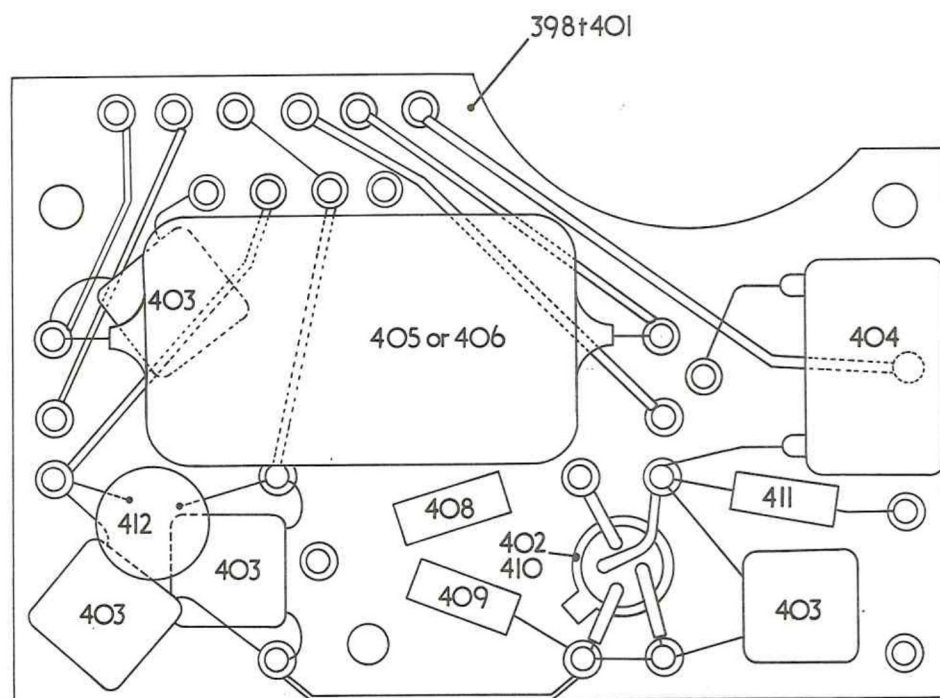


ITEM 324

FIG.5, COUPLER,ANTENNA

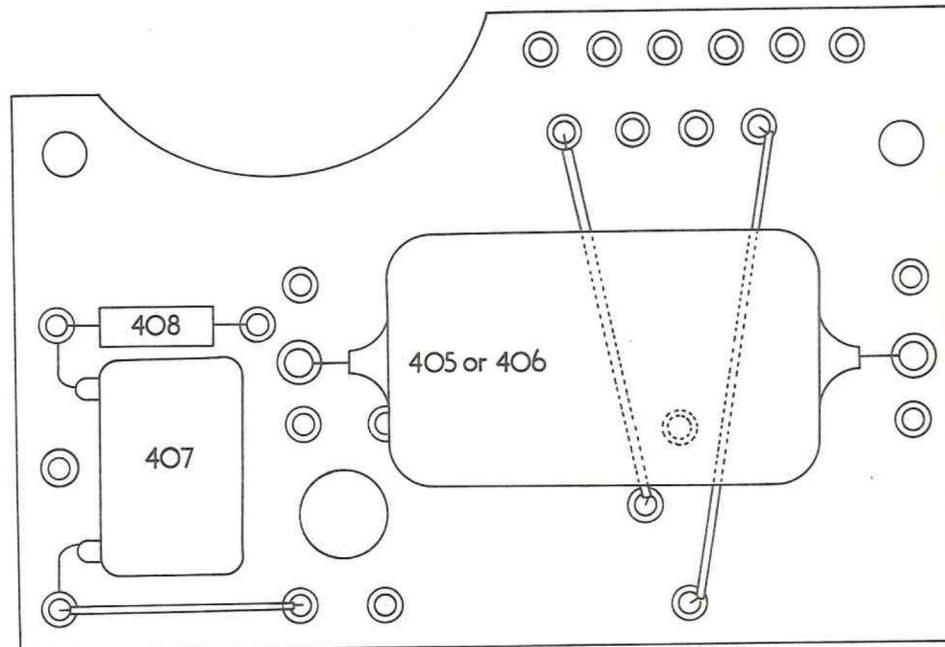

ITEM 397

FIG.6, COUPLER,ANTENNA

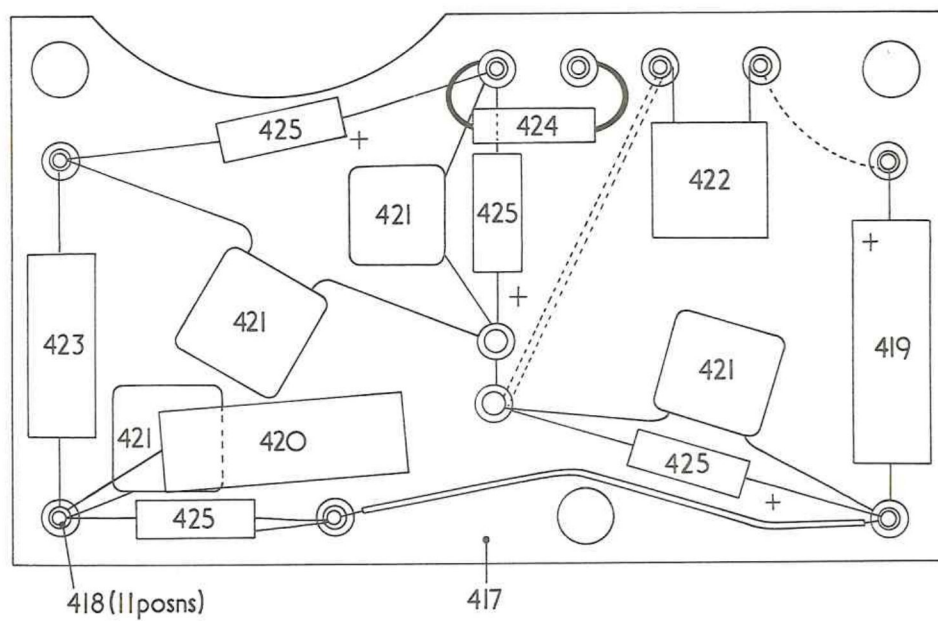

ITEM 414

FIG.7, COUPLER,ANTENNA

PARTS LIST

COUPLER, ANTENNA 5821-99-957-2082

Fig.- Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1-1		5821-99- 957-2082	A	COUPLER, ANTENNA	A31-5602-01	1
2		- - -	B	Chassis Assembly, Electrical Equipment	A31-7152-01	1
3		- - -	C	Chassis, Electrical Equipment	A31-7153-50	1
4		- - -	C	Bush, Hank 4-40 UNC	PF45001/32	3
5		- - -	C	Plate	A31-7154-50	1
6		- - -	C	Stud	A31-8284-50	1
7		- - -	C	Label	A31-8139-50	1
8		- - -	C	Label	A31-9237-50	1
9		5305-99- 618-3417	B	SCREW, EXTERNALLY- RELIEVED BODY UNC; corrosion resistant steel; fillister; slot drive; 6-32 by 37/64in. lg, scr 15/64in.	A31-7740-50	4
10		5340-99- 622-0404	B	INSERT, SCREW THREAD corrosion resistant steel; 1/4in. UNF; rd wrenching facility; 17/64in. lg	A31-7415-50	4
11		5310-99- 618-0011	Z	NUT, SLEEVE UNF; corrosion resistant steel; 1/4in. -32, 3/8in. w A/F, 7/32in. o/a h	A31-7416-50	4
12		5310-99- 222-5568	Z	WASHER, LOCK corrosion resistant steel; single coil; 4BA bolt size; 1/4in. od, 3/64in. thk	Morlock Washer Co. Ltd MW10/7 (PF74102/ 404)	4

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1-13	PLC	5935-99-222-7034	B	PLUG, ELECTRICAL free; plastics; 1 pole, co-axial, 50 ohms; female shell; non-locking type	A31-6018-01	1
14		5305-99-913-7137	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; 4-40 by 5/8in. lg; class 2A thd	B.S.I. BS1981 Table 16 (PF47441/ 420)	4
15		5310-99-941-8653	Z	WASHER, FLAT corrosion resistant steel; rd; rd hole; 6BA (4UN); 0.288 (9/32in.) od, 0.036in. (20 SWG) thk	B.S.I. BS3410 Table 2 (PF74001/ 406)	4
16		5310-99-946-4984	Z	NUT, SELF LOCKING, HEXAGON UNC; steel; cadmium plated with nylon insert; no.4 by 0.188in. w A/F by 0.143 in. h	B.S.I. BS.A128A/ 77 (PF45402/ 22)	4
17		5935-99-630-8448	C	PLUG, TIP pin type contact element; 1-13/32in. o/a lg	A33-3537-01	1
18		5315-99-952-0173	Z	PIN, SPRING steel; oxidised blue; 0.063 in. nominal dia, 0.250in. lg	Grover TP116 (PF70011/ 001)	1
19		5310-99-941-8703	Z	WASHER, FLAT brass; rd; tin plated; rd hole; 6BA (4UN); 0.233 (15/64) in. od, 0.024in. (23 SWG) thk	B.S.I. BS3410 Table 1 (PF74011/ 706)	1
20		- - -	C	Plug Housing	A31-5380-50	1
21		5330-99-618-0000	B	GASKET aluminum alloy; square; 1-1/2in. lg, 1-1/2in. w, 3/16in. thk	A33-0154-50	1
22		- - -	B	Cableform	A31-8037-01	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Ident	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1-23		5305-99-198-8174	Z	SCREW, MACHINE UNC; corrosion resistant steel; flat csk; slot drive; 4-40 by 5/16in. class 2A thd	B.S.I. BS3155 Table 9 (PF47401/410)	2
24		5310-99-112-6177	Z	NUT, PLAIN, HEXAGON UNC; corrosion resistant steel; chamfered bearing surface; 4-40, 1/4in. w A/F, 3/32in. o/a h	B.S.I. BS3155 Table 15 (PF45101/404)	2
25		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od; 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/406)	2
26		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/406)	2
27		6145-99-913-4246	C	CABLE, RADIO FREQUENCY co-axial; 50 ohms impedance teflon dielectric; single braid; teflon jacket; 0.080 in. od	Amphenol (GB) Ltd 421-109 (PW7403/1)	A/R
28	PLD	5935-99-911-8185	C	PLUG, ELECTRICAL fixed; female shell; 37 contacts	Cannon Elect Co DC-37P (WIS6229/B Sh1 Ref. 5)	1
29		- - -	B	Switch And Drive Assembly	A31-8029-01	1
30		5305-99-122-0410	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan no.2 hd; slot drive; no.4 by 7/16in. lg; class 2A thd	B.S.I. BS1981 Table 12 (PF47441/414)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1-31		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od; 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/ 406)	2
32		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od; 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	2
33		5305-99-128-9317	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.6 by 1/4in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47641/ 408)	2
34		5310-99-971-3720	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 1/8in. nominal bolt size, 1/4in. od, 0.006in. thk	B.S.I. BS3401 (PF74121/2)	2
2-35	2X3	5990-99-624-9827	C	AMPLIFIER, SYNCHRO SIGNAL 1-3/8in. lg, 1-3/16in. w	(WIS13052/ B Sh.1 Ref 1)	1
36		5340-99-618-0036	C	CLAMP, RIM CLENCHING corrosion resistant steel; 5/16in. lg, 1/4in. w, 9/64 in. h	A31-6807-50	2
37		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Ident	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-38	2X4	6105-99-622-3267	C	MOTOR, CONTROL 1-1/16in. dia by 1-5/8in. lg o/a dim	PC580015/1	1
39				OR MOTOR, SERVO AC; Size 11	VA-31-0010-1	1
40		5340-99-618-0036	C	CLAMP, RIM CLENCHING corrosion resistant steel; 5/16in. lg, 1/4in. w, 9/64in. h	A31-6807-50	2
41		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	2
42		5821-99-618-8791	C	INDEXING ARM corrosion resistant steel; 31/32in. lg, 13/16in. w, 1/4in. h	A31-7443-50	1
43		5315-99-952-0160	Z	PIN, SPRING steel; 1/16in. nom dia; 5/16in. lg; 0.013in. thk of material	Grover Co Ltd TP116 (PF70011/ 002)	1
44		5940-99-618-0123	C	TERMINAL BOARD bakelite; 1-3/4in. lg, 39/64in. w, 1/16in. thk; 6 post type terminals	A31-9970-01	1
45		- - -	D	Tagboard	A31-9970-50	1
46		- - -	D	Terminal Lug	W70330/C Ref.3	6
47	C36 C37	5910-00-998-5583	C	CAPACITOR, FIXED, CERAMIC DIELECTRIC insulated, 0.01uF, $\pm$ 10%; 200V dc working	Vitramon Inc. VK33BW103K (PC17922/4)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Ident	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-48	C22 C45	5910-99- 107-6631	C	CAPACITOR, FIXED, CERAMIC DIELECTRIC rect; insulated; 0.1uF, ± 10%; 100V dc working	Vitramon Laborator- ies Ltd VK30BX 104 K (PC17754/ 12)	2
49	L5		C	INDUCTOR, RADIO FREQUENCY 470 uH, ± 10%	PC473025/ 43	1
50	R18	5905-99- 013-6354	C	RESISTOR, FIXED, FILM insulated; 4.7k ohms, ± 2%; 1/16W	DEF STAN 59-30(PT1) -2 BS9111-N- 002 FX (PC66365/ 28)	1
51		5340-99- 618-0002	C	STRAP, RETAINING brass; single; 1-3/16in. id lg, 11/64in. h grip; 1-11/16in. o/a lg, 3/16in. w, 0.280in. thk; tin plate finish	A31-9971-50	1
52		5305-99- 122-0527	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.2-56 by 5/16in. lg; class 2A thd	B.S.I. BS1981 (PF47241/ 410)	2
53		5310-99- 947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size, 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHS (PF74102/ 408)	2
54		5821-99- 618-0031	C	INDUCTANCE CAPACITOR SWITCH ASSEMBLY 3in. lg, 3in. w, 2-1/2in. h o/a dim.	A31-7802-01	1
55	- - -		D	Drive Plate Assembly	A31-7178-01	1
56		5315-99- 952-0282	Z	PIN, SPRING steel; 1/16in. dia, 1/2in. lg; 0.013in. thk	Grover TP116 (PF70011/ 005)	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-57		- - -	E	Flange Plate	A31-6674-50	1
58		- - -	E	Pin	A31-6673-50	1
59		5340-99-618-0013	D	POST, ELECTRICAL-MECHANICAL EQUIPMENT corrosion resistant steel; hex sect; 1-1/32in. post lg; tapped 2-56 UNC by 1/4 in. lg both ends	A31-8773-50	2
60		5305-99-133-3513	Z	SCREW, MACHINE UNC; corrosion resistant steel; flat csk hd; slot drive; no.2 by 7/16in.; class 2A thd	B.S.I. BS3155 Table 1 (PF47201/ 414)	2
61		5305-99-122-0526	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.2-56 by 1/4in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/ 408)	2
62		5310-99-194-8147	Z	WASHER, FLAT corrosion resistant steel; rd; 3/32in. id, 3/16in. od by 1/64in. thk	B.S.I. BS3410 Table 1 (PF74011/ 408)	2
63		5310-99-947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size; 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWSH (PF74102/ 408)	2
64		5940-99-618-0224	D	LINK, TERMINAL CONNECTING copper; silver plated; 19/64in. c to c	A31-8176-50	2
65		5821-99-618-5967	D	CAPACITOR BOARD bakelite; 2-1/2in. lg, 1-3/16in. w, 1/16in. thk	A31-6709-50	1
66		5821-99-618-0043	D	INSULATOR PTFE; 33/64in. id, 37/64in. in. od, 31/64in. lg	A31-8409-50	6

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-67	2C24	5910-99-630-8449	D	CAPACITOR, FIXED, CERAMIC DIELECTRIC tubular; insulated; 15pF, $\pm 20\%$; 4kV dc working	A33-3506-50	1
68	2C25	5910-99-630-8450	D	CAPACITOR, FIXED, CERAMIC DIELECTRIC tubular; insulated; 22pF, $\pm 20\%$; 4kV dc working	A33-3506-51	1
69	2C26	5910-99-630-8451	D	CAPACITOR, FIXED, CERAMIC DIELECTRIC tubular; insulated; 33pF, $\pm 20\%$; 4kV dc working	A33-3506-52	1
70	2C27 2C28 2C29	5910-99-630-8452	D	CAPACITOR, FIXED, CERAMIC DIELECTRIC tubular; insulated; 47pF, $\pm 20\%$; 4kV dc working	A33-3506-53	3
71		5365-99-618-1022	D	SPACER, SLEEVE aluminium alloy; 1/8in. id, 1/4in. od, 25/32in. lg	A31-6707-50	2
72		5821-99-618-0189	D	CAM, CONTROL brass; nickel plate; 1in. dia, 21/64in. lg	A31-6670-50	1
73		5315-99-952-0282	Z	PIN, SPRING steel; 1/16in. dia, 1/2in. lg; 0.013in. thk	Grover TP116 PF70011/005	1
74		5821-99-618-0235	D	SWITCH SEGMENT plastics; 2-5/8in. lg, 2-1/4in. w, 1/2in. h	A31-6587-51	1
75		3120-99-618-5991	D	BUSHING, SLEEVE aluminium-nickel-iron-bronze; 15/64in. id, 7/16in. od, 5/16in. lg	A31-6619-50	2
76		5365-99-618-0231	D	SHIM copper; solid; 1/4in. id, 7/16in. od, 0.005in. thk	A31-7155-50	4
77		- - -	D	Stud	A33-0040-50	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-78		5310-99-112-6177	Z	NUT, PLAIN, HEXAGON UNC; corrosion resistant steel; chamfered bearing surface; 4-40, 1/4in. w, A/F, 3/32in. o/a h	B.S.I. BS3155 Table 15 (PF45101/ 404)	4
79		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od; 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/ 406)	4
80		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	4
81		- - -	D	Stud	A31-6705-50	2
82		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	4
83		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od, 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/ 406)	4
84		5310-99-112-6177	Z	NUT, PLAIN, HEXAGON UNC; corrosion resistant steel; chamfered bearing surface; 4-40, 1/4in. w A/F, 3/32in. o/a h	B.S.I. BS3155 Table 15 (PF45101/ 404)	4
85		5821-99-618-0035	D	ROTOR BLADE ASSEMBLY 1-3/4in. dia, 2-3/4in. lg	A31-7180-01	1
86		- - -	E	Spindle	A31-6668-50	1
87		- - -	E	Switch Blade	A31-6620-50	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-88		- - -	E	Switch Rotor	A31-6618-50	1
89		5315-99-952-0173	Z	PIN, SPRING steel; oxidised blue; 0.063 in. nominal dia, 0.250in. lg	Grover TP116 (PF70011/001)	2
90		- - -	Z	Pin, Spring 1/16in. dia, 5/8in. lg	PF70011/007	1
91		5821-99-618-0234	D	SWITCH SEGMENT plastics; 2-5/8in. lg, 2-1/4in. w, 1/2in. h	A31-6587-50	1
92		5821-99-618-0023	D	CIRCULAR NUT brass; silver plate finish; 1/8in. dia, 3/16in. lg	A31-6708-50	14
93		5305-99-107-3045	Z	SCREW, MACHINE UNF; corrosion resistant steel; pan hd; no.2; slot drive; 0 (0.060in.) 80 by 3/16in.; class 2A thd	B.S.I. BS3155 Table 9 (PF42041/406)	14
94		5310-99-639-3199	Z	WASHER, FLAT brass; rd hole; silver plated; 1.8mm id, 1/4in. od, 0.031in. thk	A33-5646-50	14
95		5999-99-618-0212	D	CONTACT, ELECTRICAL brass; 7/8in. lg, 1/8in. dia	A31-8681-01	13
96		- - -	E	Contact Spring	A31-8680-50	1
97		- - -	E	Contact	A31-8678-50	1
98		5821-99-618-0021	D	INDEXING CAM brass; silver plate finish; 1-1/4in. dia, 3/8in. lg	A31-6672-50	1
99		5315-99-952-0282	Z	PIN, SPRING steel; 1/16in. dia, 1/2in. lg; 0.013in. thk	Grover TP116 (PF70011/005)	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-100	SCB	5930-99-932-2408	D	SWITCH, SENSITIVE plunger type; single pole; double throw; 1 position momentary	Burgess Micro Switch Co Ltd V4-T2 (PC71613/2)	1
101		5930-99-100-9144	D	ADAPTOR, SWITCH ACTUATOR spring leaf with roller	Burgess Micro Switch Co Ltd V4LR1 (PC73726/2)	1
102		5310-99-618-0347	Z	NUT, STRIP UNC; corrosion resistant steel; 2-56 tpi; 17/32in. lg, 5/32in. w, 0.048in. thk	A31-7156-50	1
103		5305-99-952-0158	Z	SCREW, MACHINE UNC; corrosion resistant steel; hexagon hd; 2-56 by 0.438in. lg; class 2A thd	BS3155 Table 13 (A33-3600-51)	2
104		5310-99-943-6075	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 3/32in. id; 13/64in. od; 0.006in. thk	Haddon & Stokes Ltd DP1001 (PF74121/1)	2
105	2SC	5930-99-932-2408	D	SWITCH, SENSITIVE plunger type; single pole, double throw; 1 position momentary	Burgess Micro Switch Co Ltd V4-T2 (PC71613/2)	1
106		5930-99-100-9144	D	ADAPTOR, SWITCH ACTUATOR spring leaf with roller	Burgess Micro Switch Co Ltd V4LR1 (PC73726/2)	1
107		5310-99-618-0347	D	NUT, STRIP UNC; corrosion resistant steel; 2-56 tpi; 17/32in. lg, 5/32in. w, 0.048in. thk	A31-7156-50	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-108		5365-99-618-1021	D	SPACER, SLEEVE aluminium alloy; 3/32in. id, 3/16in. od, 7/32in. lg	A31-6704-50	2
109		5305-99-630-1107	Z	SCREW, MACHINE UNC; corrosion resistant steel; hex head; no.2-56 by 43/64in. lg; screw 41/64in. lg; class 2A thd	A33-3600-50	2
110		5310-99-943-6075	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 3/32in. id; 13/64in. od; 0.006in. thk	Haddon & Stokes Ltd DP1001 (PF74121/1)	2
111	2SD	5930-99-932-2408	D	SWITCH, SENSITIVE plunger type; single pole, double throw; 1 position momentary	Burgess Micro Switch Co Ltd V4-T2 (PC71613/2)	1
112		5930-99-100-9144	Z	ADAPTOR, SWITCH ACTUATOR spring leaf with roller	Burgess Micro Switch Co Ltd V4LR1 (PC73726/2)	1
113		5310-99-618-0347	Z	NUT STRIP UNC; corrosion resistant steel; 2-56 tpi; 17/32in. lg, 5/32in. w, 0.048in. thk	A31-7156-50	1
114		5305-99-952-0158	Z	SCREW, MACHINE UNC; corrosion resistant steel; hexagon hd; 2-56 by 0.438in. lg; class 2A thd	BS3155 Table 13 (A33-3600-51)	2
115		5310-99-943-6075	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 3/32in. id; 13/64in. od; 0.006in. thk	Haddon & Stokes Ltd DP1001 (PF74121/1)	2
116		5310-99-618-1462	Z	WASHER, FLAT phosphor bronze; rect; silver plate; rd hole; 1/16in. bolt hole; 1/4in. lg, 1/8in. w, 0.018in. thk	A31-8592-50	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-117		5999-99-618-0202	D	CONTACT, ELECTRICAL phosphor bronze; 27/32in. lg; 41/64in. w, 1/8in. h	A31-8515-01	1
118		- - -	E	Spring Leaf	A31-8514-50	1
119		- - -	E	Contact Rivet, Domed	PC278002/1	1
120		5940-99-618-0222	D	LINK, TERMINAL CONNECTING copper; silver-plated; 3/4 in. c to c	A31-8175-50	1
121		5340-99-618-0226	C	POST, ELECTRICAL-MECHANICAL EQUIPMENT corrosion resistant steel; hex sect; 1-9/16in. post lg; tapped 4-40 by 1/4in. lg 1st end, thd 4-40 UNC by 7/32in. lg 2nd end.	A31-7412-50	1
122		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	1
123		5305-99-952-3003	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan no.2 hd; 4 (0.112 in.) -40 by 1/2in. lg, class 2A thd	B.S.I. BS3155 Table 9 (PF47441/ 416)	1
124		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od, 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/ 406)	1
125		5340-99-618-0003	C	POST, ELECTRICAL-MECHANICAL EQUIPMENT corrosion resistant steel; hex sect; 39/64in. post lg; tapped 4-40 UNC by 1/4in. lg 1st end, thd 4-40 UNC by 7/64in. lg 2nd end	A31-7411-50	2
126		5305-99-914-9807	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot dirve; no.4-40 by 5/16in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47441/ 410)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Ident	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-127		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/406)	2
128		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od; 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/406)	2
129		5821-99-618-0008	C	DRIVE WHEEL ASSEMBLY	A31-8046-01	1
130		5315-99-107-1141	Z	PIN, SPRING steel; cadmium plated; 6mm lg; 1mm dia, 0.200mm thk	PF70012/003	1
131		- - -	D	Drive Wheel	A31-8047-50	1
132		- - -	D	Pin	A31-8048-50	1
133	2SE 2SF	5930-99-932-2408	C	SWITCH, SENSITIVE plunger type; single pole; double throw; 1 position momentary	Burgess Micro Switch Co Ltd V4-T2 (PC71613/2)	2
134		5305-99-618-1463	Z	SCREW, EXTERNALLY RELIEVED BODY UNC; corrosion resistant steel; pan no.2 hd; slot drive; 2-56 thd size; 3/8 in. lg; 3/32in. lg thd	A31-8388-50	4
135		5310-99-943-6075	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 3/32in. id; 13/64 in. od; 0.006in. thk	Haddon & Stokes Ltd DP1001 (PF74121/1)	4
136		5970-99-630-8453	C	INSULATOR, PLATE synthetic rubber or synthetic rubber coated fibre glass; rect; 25/32in. lg; 1/2in. w; 1/64in. thk	Burgess Micro Switch Co Ltd 4619 (PC74030/1)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig-Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-137		5821-99-618-0187	C	CAM, CONTROL corrosion resistant steel; 1/4in. dia, 9/32in. lg	A31-7414-50	1
138		5315-99-107-1141	Z	PIN, SPRING steel; cadmium plated; 6mm lg, 1mm dia, 0.200mm thk	PF70012/003	1
139		- - -	C	Label	A31-9496-50	1
140		5821-99-618-0033	C	GEAR PLATE ASSEMBLY 3-1/4in. lg, 2-5/8in. w, 1in. h o/a dim	A31-7689-01	1
141		- - -	D	Gear Plate Assembly	A31-7598-01	1
142		- - -	E	Plate	A31-7634-50	1
143		- - -	E	Plate	A31-7597-50	1
144		5305-99-111-1337	Z	SCREW, MACHINE UNC; corrosion resistant steel; flat csk hd; slot drive; 2-56 by 1/4in. lg, class 2A thd	B.S.I. BS3155 Table 1 (PF47201/ 408)	1
145		- - -	Z	Dowel	A31-8838-50	2
146		- - -	D	Spacer	A31-7599-01	1
147		- - -	E	Spacer	A31-7599-50	1
148		- - -	E	Insert	PF45091/5	2
149		5340-99-618-4028	E	INSERT, SCREW THREAD corrosion resistant steel; coiled wire type; 4-40 UNC; 7/32in. nom o/a lg	Armstrong Patents Ltd 3585-04CNO .224 in. (PF45091/7)	2
150		- - -	D	Plate	A31-7635-50	1
151		5305-99-119-0996	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.4-40 by 7/8in. lg; class 2A thd	B.S.I. BS1981 Table 12 (PF7441/ 428)	6

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-152		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated 1/8in. id (6BA), 15/64in. od; 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/ 406)	6
153		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	6
154		- - -	Z	Dowel Pin	A31-7456-50	4
155		5821-99-618-0228	C	GEAR SPUR ASSEMBLY 11/16in. od, 1in. lg o/a dim	A31-6856-01	1
156		- - -	D	Gear, Spur	A31-6855-50	1
157		- - -	D	Pin	A31-6848-50	1
158		5821-99-618-0186	C	GEAR CLUSTER, SPUR 2 gears; 25/32in. od, 1-9/16in. o/a lg	A31-6824-01	1
159		3020-99-119-7031	C	GEAR CLUSTER, SPUR 2 gears; 25/32in. od, 53/64in. o/a lg	A31-6815-01	1
160		5821-99-618-0183	C	GEAR CLUSTER, SPUR 2 gears; 51/64in. od, 1-1/8in. lg, o/a dim	A31-6979-01	1
161		5821-99-618-0014	C	SLIPPING CLUTCH ASSEMBLY	A31-8028-01	1
162		- - -	D	Gear, Spur	A31-7049-50	1
163		- - -	Z	Circlip	PH64702/3	1
164		- - -	Z	Washer	A31-7191-51	1
		- - -	Z	Washer	A31-7192-50	1
165						
166		- - -	D	Spring	A31-8060-50	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
2-167		- - -	D	Gear, Spur	A31-7048-50	1
168		- - -	D	Washer	A31-7191-51	1
169		- - -	D	Ball 3/32in. dia	PC135002/5	3
170		5365-99-618-0233	C	SHIM phosphor bronze; solid; 1/8in. id, 3/8in. od, 0.006in. thk	A31-8406-50	1
171		5821-99-618-0176	C	GEAR, SPUR corrosion resistant steel; 70 teeth; 1/8in. bore, 29/32in. od, 25/32in. lg	A31-7052-50	1
172		5821-99-618-0181	C	GEAR CLUSTER, SPUR 2 gears; 9/16in. od, 5/8in. lg o/a dim.	A31-6738-01	1
173		5821-99-618-0184	C	GEAR CLUSTER, SPUR 2 gears; 5/8in. od, 3/4in. o/a lg	A31-6780-01	1
174		5821-99-618-0185	C	GEAR CLUSTER, SPUR 2 gears; 5/8in. od, 3/4in. o/a lg	A31-6788-01	1
175		3020-99-119-7030	C	GEAR CLUSTER, SPUR 2 gears; 25/32in. od, 27/32 in. o/a lg	A31-6802-01	1
176		5821-99-618-0173	C	GEAR, SPUR corrosion resistant steel; 48 teeth; 1/4in. bore; 25/32in. od, 1-3/64in. o/a lg	A31-6797-50	1
1-177		5340-99-119-7036	B	SPACER, SCREWED brass; hexagon, 17/32in. lg; UNC 2-56 thd size	A31-6845-50	4
178		5305-99-111-1337	Z	SCREW, MACHINE UNC; corrosion resistant steel; flat csk hd; slot drive; 2-56 by 1/4in. lg class 2A thd	B.S.I. BS3155 Table 1 (PF47201/ 408)	4

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1- 179 180		- - - 5940-99- 940-9352	B Z	Panel TERMINAL, LUG 8BA; brass; tin dipped; 3/8in. lg, 3/16in. w, 1/64 in. h; 25 swg conductor; soldered connection	A31-6843-50 Ross Courtney Co Ltd 303 (WIS7924/C Sh.1 Ref.1)	1 1
181		5305-99- 122-0526	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.2-56 by 1/4in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF74241/ 408)	4
182		5310-99- 943-6075	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 3/32in. id, 13/64in. od, 0.006in. thk	Haddon & Stokes Ltd DP1001 (PF74121/1)	4
183	2RLA 2RLB	5821-99- 116-3633	B	RELAY spdt, 26.5V dc working; 265 ohms $\pm$ 10%	ITT Jennings RB8A (PC65245/1)	2
				OR		
184	RLA RLB	5945-99- 119-8985	B	RELAY, ARMATURE	A33-0196-01	2
+ 185		- - -	C	Relay, Magnetic dc; vacuum sealed; 1C	PC65232/2	1
		- - -	C	Sleeve	A33-0195-50	3
1- 187		5961-99- 118-1078	B	SEMICONDUCTOR DEVICE, DIODE	A33-0111-50	2
+ 188		5821-99- 618-0024	B	TERMINAL brass; 5/16in. dia, 3/16in. lg	A31-8813-50	2
189		5305-99- 914-3386	Z	SCREW, GRUB UNC; steel; socket drive; cup point; cadmium plated; no.4 by 1/8in. lg	Unbrako Co Ltd SP4 UNC by 1/8in. Cadmium Plated (PF47471/1)	4

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1-190		5821-99-119-0548	B	ANTI CORONA CAP brass; 13/32in. dia, 5/16in. lg	A31-8062-50	3
191		5305-99-914-3386	Z	SCREW, GRUB UNC; steel; socket drive; cup point; cadmium plated; no.4 by 1/8in. lg	Unbrako Co Ltd SP 4 UNC by 1/8in. Cadmium Plated (PF47471/1)	6
192		5940-99-914-5301	B	TERMINAL, LUG 2BA; brass; tinned; 0.531in. lg o/a, 5/16in. dia o/a, 0.018in. thk, 15 SWG conductor; soldered connection	Tucker Eyelet Co Ltd G369 (PC77105/1)	1
193		5305-99-622-3250	Z	SCREW, MACHINE BA; corrosion resistant steel; rd hd; slot drive; no.2 by 3/16in. lg; normal class thd	B.S.I. BS57 (PF13241/406)	1
194		5310-99-946-9796	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 0.208in. max, 0.203in. min dia hole, 0.308in. max, 0.370in. min od, 0.012in. thk	B.S.I. BS3401 (PF74121/5)	1
195	C32	5910-99-618-3028	B	CAPACITOR, FIXED, CERAMIC DIELECTRIC uninsulated; 100pF, $\pm 20\%$; 44V dc working	Erie Elect Ltd C409/23 (PC17746/2)	1
196		5310-99-946-9796	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 0.208in. max, 0.203in. min dia hole, 0.308 in. max, 0.370in. min od, 0.012in. thk	B.S.I. BS3401 (PF4121/5)	1
197		5821-99-618-0026	B	SPACER brass; greville tinned finish; 7/8in. dia by 3/4in. dia 1/2in. lg	A31-7743-50	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1-198		5310-99-946-9796	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 0.208in. max, 0.203in. min dia hole, 0.380in. max, 0.370in. min od, 0.012in. thk	B.S.I. BS3401 (PF74121/5)	1
199	C31	5910-99-618-3029	B	CAPACITOR, FIXED, CERAMIC DIELECTRIC uninsulated; 200pF, $\pm 20\%$; 5 kV dc working	Erie Elect Ltd C409/33 (PC17746/1)	1
200		5310-99-946-9796	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 0.208in. max, 0.203in. min dia hole, 0.380in. max, 0.370in. min od, 0.012in. thk	B.S.I. BS3401 (PF74121/5)	1
201		5940-99-618-0200	B	TERMINAL, LUG 5/64in. dia hole; tinned; 13/16in. lg, 29/64in. w, 5/32in. h, 15 SWG conductor, soldered connection	A31-7417-50	1
202		- - -	B	Base Assembly	A31-7586-01	1
203		- - -	Z	Screw, Machine UNC; csk hd; 4-40 by 3/16in. lg	PF47401/406	3
204		- - -	C	Base	A31-7585-01	1
205		- - -	D	Base	A31-7585-50	1
206		- - -	D	Insert	PF45091/4	
207		- - -	C	Stud	A31-7584-50	1
208		5821-99-618-0025	B	SERIES PHASE DETECTOR ASSEMBLY 1-21/32in. lg, 1-5/8in. w, 7/8in. h o/a dim.	A31-7970-01	1
209		5305-99-111-1337	Z	SCREW, MACHINE UNC; corrosion resistant steel; flat csk hd; slot drive; 2-56 by 1/4in. lg; class 2A thd	B.S.I. BS3155 Table 1 (PF47201/408)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1-210		- - -	C	Chassis Assembly, Electrical Equipment	A31-7969-01	1
211		- - -	D	Chassis, Electrical Equipment	A31-7651-50	1
212		5940-99-199-4677	D	TERMINAL, POST brass; tinned or silver finish; 27/64in. lg, 1/8in. dia	Henry & Thomas Ltd 12300/2 (PC76012/11)	7
213		5310-99-951-0674	D	NUT, PLAIN, CLINCH hex, UNC; brass; tin plated; 2(0.074in)-56, 0193in. w, A/F, 0.143in. o/a h; for 0.082in. max plate	WQ9094/C Ref.21	2
214	2T3	5950-99-119-7035	C	TRANSFORMER, RADIO FREQUENCY 8 turns; screened; 1-1/4in. lg, 9/16in. w	A31-8744-01	1
215		5305-99-107-3046	Z	SCREW, MACHINE UNF; corrosion resistant steel; slot drive; no.0-80 by 1/8in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF42041/404)	2
216		5310-99-944-5616	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 0.080/0.075in. bolt size; 5/32in. od, 0.006in. thk	B.S.I. BS3401 (PF74121/01)	2
217	2D9 2D10	5961-99-118-6951	C	SEMICONDUCTOR DEVICE SET 2 diodes	A33-4998-50	1 pair
218	2R12 2R13	5905-99-013-6330	C	RESISTOR, FIXED, FILM insulated; 470 ohms, $\pm 2\%$; 1/16W	DEF STAN 59-30(PT1) -2 BS9111-I:-002 FX (PC66365/16)	2
219	2R21 2R22	5905-99-013-6346	C	RESISTOR, FIXED, FILM insulated; 2.2k ohms, $\pm 2\%$; 1/16W	DEF STAN 59-30(PT1)-1 BS9111-N-002 1X-56-F (PC66365/24)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1-220	2C44	5910-99-625-9824	C	CAPACITOR, FIXED, CERAMIC DIELECTRIC insulated; 10uF, $\pm$ 10%; 200V dc working	PC216114/11	1
221	2C34	5910-99-618-5990	C	CAPACITOR, FIXED, MICA DIELECTRIC metallised; plastics case; 250pF, $\pm$ 10%; 500V dc working	Erie Elect Ltd 660-005 (PC18634/1)	1
222	- - -	- - -	C	Terminal Tag	PC77109/13	1
223		5305-99-122-0391	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; cross recess type 1; no.3-48; 0.187in. lg; class 2A thd	B.S.I. BS1981 Table 12 (PF47341/406)	1
224		5310-99-971-3720	C	WASHER, SPRING TENSION beryllium copper; cadmium plated; 1/8in. nominal bolt size, 1/4in. od, 0.006in. thk	B.S.I. BS3401 (PF47121/2)	4
225		5821-99-618-0017	B	SERIES COIL ASSEMBLY 2-5/8in. lg, 2-1/4in. w, 1-7/8in. h o/a dim.	A31-8014-01	1
226		5305-99-945-1982	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; 4-40 by 1/4in. lg; class 2A thd	B.S.I. BS1981 Table 12 (PF47441/408)	4
227		5310-99-971-3720	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 1/8in. nominal bolt size; 1/4in. od, 0.006in. thk	B.S.I. BS3401 (PF74121/2)	4
3-228		3040-99-119-7034	C	COUPLING HALF, SHAFT srbf; 7/8in. od, 7/32in. h	A31-8049-50	1
229		5315-99-107-1141	Z	PIN, SPRING steel; cadmium plated; 6mm lg, 1mm dia, 0.200mm thk	PF70012/003	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3-230		- - -	C	Retainer	A31-7793-50	2
231		5940-99-940-9352	C	TERMINAL, LUG 8BA; brass; tin dipped; 3/8in. lg, 3/16in. w, 1/64 in. h; 25 swg conductor; soldered connection	Ross Courtney & Co Ltd 303 (WIS7924/C Sh1.1 Ref.1)	1
232		5305-99-952-0131	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; 2-56 by 3/16in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/ 406)	4
233		5310-99-947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; No.8BA (0.095in.) bolt size, 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHS (PF74102/ 408)	4
234		5310-99-194-8147	Z	WASHER, FLAT corrosion resistant steel; rd; 3/32in. id, 3/16in. od by 1/64in. thk	B.S.I. BS3410 Table 1 (PF74011/ 408)	2
235		5821-99-618-0192	C	CONTACT ASSEMBLY, ELECTRICAL	A31-8023-01	2
236		- - -	D	Spring Leaf	A31-8024-50	1
237		- - -	D	Contact Rivet, Domed	PC278002/1	2
238		5940-99-940-9352	C	TERMINAL, LUG 8BA; brass; tin dipped; 3/8in. lg, 3/16in. w, 1/64 in. h; 25 swg conductor; soldered connection	Ross Courtney & Co Ltd 303 (WIS7924/C Sh.1 Ref.1)	2
239		5305-99-952-0131	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; 2-56 by 3/16in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/ 406)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3-240		5310-99-947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size, 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHS (PF74102/ 408)	2
241		- - -	C	Block, Locating	A31-8026-50	2
242		5305-99-952-0140	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; 2-56 by 3/8in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/ 412)	4
243		5310-99-947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size, 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHS (PF74102/ 408)	4
244		5310-99-194-8147	Z	WASHER, FLAT corrosion resistant steel; rd; 3/32in. id, 3/16in. od, by 1/64in. thk	B.S.I. BS3410 Table 1 (PF74011/ 408)	4
245		5305-99-618-5992	Z	SCREW, EXTERNALLY RELIEVED BODY UNF; corrosion resistant steel; pan no.2 hd; slot drive; 10-32 by 3/8in. lg; scr 5/32in.	A33-0422-50	1
246		5365-99-618-0198	Z	SHIM brass; solid; 13/64in. id, 9/32in. od, 0.005in. thk	A33-0425-50	12
247		- - -	C	Bracket	A33-0420-50	1
248		5305-99-122-0527	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.2-56 by 5/16in. lg; class 2A thd	B.S.I. BS1981 (PF47241/ 410)	4

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3-249		5310-99-194-8147	Z	WASHER, FLAT corrosion resistant steel; rd; 3/32in. id, 3/16in. od, by 1/64in. thk	B.S.I. BS3410 Table 1 (PF74011/ 408)	4
250		5310-99-947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size, 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHs (PF74102/ 408)	4
251		5821-99-624-0224	C	WHEEL ASSEMBLY brass; silver plated; 23/32 in. o/a lg, 1-23/32in. o/a w, 9/64in. thk; single wheel	A33-0417-01	1
252		- - -	D	Arm	A33-0418-50	1
253		- - -	D	Spindle	A31-8020-50	1
254		- - -	D	Roller Assembly	A31-7789-01	1
255		5821-99-618-0018	E	ROLLER elkonite 2% graphite; 5/8in. od, 17/32in. lg	A31-7790-50	1
256		5970-99-618-0270	E	INSULATOR, BUSHING srbf; 5/8in. od, 1/4in. lg o/a, 7/32in. dia hole	A31-7791-50	1
+ 257		- - -	D	Collar	A31-8572-50	2
258		5940-99-940-9352	C	TERMINAL, LUG 8BA; brass; tin dipped; 3/8in. lg, 3/16in. w, 1/64in. h; 25 swg conductor; soldered connection	Ross Courtney & Co Ltd 303 (WIS7924/C Sh.1 Ref.1)	1
259		5305-99-947-3260	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd no.2; slot drive; 2-56 by 1/8in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/ 404)	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
+ 260		5310-99- 947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size; 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHS (PF74102/ 408)	1
3- 261 262		- - - 5305-99- 952-0140	C Z	Spacer SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; 2-56 by 3/8in. lg; class 2A thd	A31-8015-50 B.S.I. BS3155 Table 9 (PF47241/ 412)	2 8
263		5310-99- 947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size, 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHS (PF74102/ 408)	8
264		5310-99- 194-8147	Z	WASHER, FLAT corrosion resistant steel; rd; 3/32in. id, 3/16in. od, by 1/64in. thk	B.S.I. BS3410 Table 1 (PF74011/ 408)	8
265		5821-99- 119-7032	C	HOUSING ASSEMBLY 2-3/16in. lg, 1-5/8in. w, 3/8in. h	A33-0438-02	1
266		- - -	D	Housing	A33-0437-50	1
267		- - -	D	Insert 10-32 UNF	PF40091/2	1
268		5821-99- 119-7033	C	HOUSING ASSEMBLY 2-3/16in. lg, 1-5/8in. w, 3/8in. h	A33-0438-01	1
269		- - -	D	Housing	A33-0437-50	1
270		- - -	D	Spigot	A33-0421-50	1
271		3110-99- 622-3251	C	BEARING, BALL, JOURNAL single row; 1/4in. bore; 5/8in. od, 13/64in. w, 0.2498/0.2500in. bore; 0.625in/0.622in. od, 0.196/0.194in. w	PC12605/40	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
5-272		- - -	C	Spacer	A31-8787-50	A/R
273		- - -	C	Bush	A33-0423-50	1
274		5360-99-618-0007	C	SPRING, HELICAL, EXTENSION corrosion resistant steel; 5/32in. od, 25/64in. o/a lg; hook ends	A33-1256-50	1
275		5315-99-107-1139	Z	PIN, SPRING steel; cadmium plated; 8mm lg, 1mm dia, 0.200mm thk	PF70012/005	2
276		5365-99-618-0232	Z	SHIM copper; solid; 1/4in. id, 3/8in. od, 0.0108in. thk	A33-0424-50	2
277		5821-99-119-7029	C	COIL ASSEMBLY 1-1/8in. dia, 2-1/2in. lg	A31-6952-01	1
278		- - -	D	Slip Ring	A31-8108-50	1
279		- - -	D	Spigot	A31-8021-50	1
280		- - -	D	Coil Former	A31-6213-50	1
281		- - -	D	Eyelet	WIS3090/B Ref.23	2
282		- - -	D	Fine Silver Wire	PW1021/2	6ft
283		- - -	D	Spigot	A31-8021-50	1
284		- - -	D	Slip Ring	A31-8108-50	1
285		- - -	D	Spindle	A31-8031-50	1
286		- - -	D	Holder	A31-7756-50	1
287		- - -	D	Core Ferrite Rod	PC25059/5	3
1-288		5325-99-942-3414	B	GROMMET, RUBBER synthetic; 3/16in. dia hole; 5/16in. od, groove, 0.070in. w groove; 7/16in. o/a dia; 0.094in. thk flange	BS1767 (PH36501/5)	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1-289		5325-99-942-3405	B	GROMMET, RUBBER synthetic rubber; groove 1/4in. id, 0.060in. w, 3/8in. od, 0.247in. h	SSM(L)7-11 (PH36501/3)	1
290	2L2	5821-99-618-0191	B	FIXED COIL ASSEMBLY 1-15/16in. dia, 2-1/4in. lg o/a dim.	A31-6984-01	1
291		5940-99-111-2446	B	TERMINAL, LUG 6BA; brass; tinned; 7/16in. lg, 1/4in. w, 1/64in. thk; soldered connection	Ross Courtney & Co Ltd 73 (WIS7924/C Sh.1 Ref.2)	1
292		5305-99-622-3252	Z	SCREW, MACHINE UNC; brass; pan hd; slot drive; nickel plated; 4-40 by 7/16in. lg; class 2A thd	B.S.I. BS3155 (PF47441/ 114)	2
293		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od, 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/ 406)	2
294		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	2
295		- - -	B	Chassis Assembly, Electrical Equipment	A31-8651-01	1
296		5305-99-122-0527	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.2-56 by 5/16in. lg; class 2A thd	B.S.I. BS1981 (PF47241/ 410)	1
297		5305-99-111-1337	Z	SCREW, MACHINE UNC; corrosion resistant steel; flat csk hd; slot drive; 2-56 by 1/4in. lg; class 2A thd	B.S.I. BS3155 Table 1 (PF47201/ 408)	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1-298		5305-99-953-3061	Z	SCREW, MACHINE UNC; corrosion resistant steel; flat csk hd; slot drive; 2-56 by 5/16in. lg; class 2A thd	B.S.I. BS3155 Table 1 (PF47201/410)	1
299		5310-99-194-8147	Z	WASHER, FLAT corrosion resistant steel; rd; 3/32in. id, 3/16in. od, by 1/64in. thk	B.S.I. BS3410 Table 1 (PF74011/408)	2
300		5310-99-947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size, 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHS (PF74102/408)	2
301		5310-99-194-8145	Z	NUT, PLAIN, HEXAGON UNC; corrosion resistant steel; double chamfered; 2(0.085in)-56 by 1/16in. o/a h	B.S.I. BS3155 Table 15 (PF45101/402)	1
4-302		- - -	C	Chassis, Electrical Equipment	A31-7902-01	1
303		- - -	D	Chassis, Electrical Equipment	A31-7901-50	1
304		5940-99-199-4677	D	TERMINAL, POST brass; tinned or silver finish; 27/64in. lg, 1/8in. dia	Henry & Thomas Ltd 12300/2 (PC76012/11)	19
305		5940-99-618-0210	D	TERMINAL, LEADTHROUGH 1/8in. dia, 1/2in. lg; press fit; PTFE insulation	Henry Thomas Ltd 12200/2 White (PC76513/10)	5
306		5310-99-618-0229	D	NUT, PLAIN, CLINCH hex; UNC; brass; nickel plate; 2-56 thd size; 3/16 in. A/F; 13/64in. o/a h; for 7/64in. max plate	A33-1277-50	6

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
4-307	2RV1	5905-99-944-4076	C	RESISTOR, VARIABLE wire wound; 5000 ohms, + 5%; 1 watt; linear	Painton & Co Ltd 3250L-1-502 (PC68188/1)	1
308		5310-99-618-0346	Z	NUT STRIP UNF; corrosion resistant steel; 0-80 tpi; 11/16in. lg, 5/32in. w, 0.048in. thk	A31-7897-50	1
309	2 SKTF	5935-99-519-3579	C	SOCKET, ELECTRICAL fixed; brass; through hole; mounting; 1 pole co-axial; 50 ohms; female shell; locking	Amphenol Ltd 5116-058350 (PC59945/1)	1
310	2T1 2T2	5950-99-618-0190	C	TRANSFORMER, RADIO FREQUENCY screened; 1-1/4in. lg, 1-1/4in. w o/a dim.	A31-8648-01	1
311		5305-99-122-0526	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.2-56 by 1/4in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/ 408)	2
312		5310-99-222-4457	Z	WASHER, LOCK steel; single coil; no.8BA size, 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MW9/3 (PF74101/ 208)	2
313		- - -	D	Spigot	A31-9774-50	1
314		- - -	D	Transformer	A31-9773-01	1
315		- - -	D	Transformer	A31-7609-01	1
316		- - -	D	Block Assembly	A31-8647-01	1
317		- - -	E	Block	A31-8647-50	1
318		- - -	E	Insert	PF45091/17	2
319		- - -	D	Spigot	A31-8646-50	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
4-320	2 SKTH	5935-99-519-3579	C	SOCKET, ELECTRICAL fixed; brass; through hole; mounting; 1 pole co axial 50 ohms; female shell; locking	Amphenol Ltd 5116-058350 (PC59945/1)	1
321		5365-99-618-2275	C	SPACER, SLEEVE aluminium alloy; 13/64in. id, 5/16in. od, 3/32in. lg	A31-8621-50	1
322		5310-99-946-9796	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 0.208in. max, 0.203in. min dia hole, 0.308in. max 0.370in. min od, 0.012in. thk	B.S.I. BS3401 (PF74121/5)	1
323		5310-99-124-3846	Z	WASHER, FLAT corrosion resistant steel; rd; rd hole; no.2 BA nom bolt size; 25/64in. od, 0.032in. (21 SWG) thk	B.S.I. BS3410 Table 1 (PF74011/402)	1
324		5820-99-624-9818	C	PANEL, ELECTRONIC CIRCUIT copper clad G.P.P.; 2-1/4 in. lg, 1-55/64in. w, 1/16 in. thk, 32 components	A21-4007-01	1
325		5305-99-122-0526	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.2-56 by 1/4in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/408)	4
326		5310-99-943-6075	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 3/32in. id, 13/64in. od, 0.006in. thk	Haddon & Stokes Ltd DP1001 (PF74121/1)	4
5-327		- - -	D	Board, Electronic Circuit	A21-4007-50	1
328	R10 R17	5905-99-013-6370	D	RESISTOR, FIXED, FILM insulated; 22k ohms, $\pm 2\%$; 1/16W	DEF STAN 59-30(PT1) -2 BS9111-N- 002 FX (PC66365/35)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
5-329		5940-99-952-0277	D	TERMINAL, POST brass; tinned; 0.086in. dia, 0.297in. lg	PH77001/1	13
330	VT2	5961-00-901-3270	D	TRANSISTOR	E.I.A. 3N79	1
331		5970-99-951-2847	D	INSULATOR, STANDOFF cylindrical pillar type, plastics; 1/4in. dia, 1/16in. thk	A30-3624-50	1
332	C39	5910-99-013-0510	D	CAPACITOR, FIXED ELECTROLYTIC tantalum electrode; sintered; tub. metal case; insulated; 6.8uF, $\pm 20\%$; 35V dc working	DEF5134-A-1 CET30-B (PC18415/6)	1
333	C1 C2 C16	5910-99-011-8348	D	CAPACITOR, FIXED, CERAMIC DIELECTRIC tub; non-insulated; 10pF, $\pm 0.5pF$; 750V dc working	DEF5133-1 CC2-G (PC18363/9)	3
334	C4	5910-99-952-8970	D	CAPACITOR, FIXED, MICA DIELECTRIC metallised; rect plastic case; 150pF, $\pm 1.33\%$; 125V dc working	S.T. & C. Ltd 454/LWA/60 LAT (PC18996/ 11)	1
335	C17	5910-99-951-4067	D	CAPACITOR, FIXED, MICA DIELECTRIC metallised; rect plastics case; 240pF, $\pm 1.25\%$ (3pF); 125V dc working	S.T. & C. 454/LWA/60 LBP (PC18635-3)	1
336	C3 C13 C14 C15	5910-00-998-5583	D	CAPACITOR, FIXED, CERAMIC DIELECTRIC insulated; 0.01uF, $\pm 10\%$; 200V dc working	Vitramon Inc VK33BW103K (PC17922/4)	4
337	C18 C38	5910-99-142-4714	D	CAPACITOR, FIXED, PLASTICS DIELECTRIC metallised, rectangular plastics case; insulated; 0.22uF, $\pm 20\%$; 100V dc working	S.T. & C. Ltd PMFO.22M1 00 (PC19896/5)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
5-338	D6 D7	5961-99-118-6951	D	SEMICONDUCTOR DEVICE SET 2 diodes	A33-4998-50	1pr
339	D8	5961-99-037-4770	D	SEMICONDUCTOR DEVICE, DIODE CV9556	Texas Inst Ltd 1S7047B	1
340	D1 D2 D13	5961-99-118-1078	D	SEMICONDUCTOR DEVICE, DIODE	A33-0111-50	3
341	R5	5905-99-013-5959	D	RESISTOR, FIXED, FILM insulated; 33ohms, $\pm 2\%$; 1/8W	DEF STAN 59-30(PT1) -2 BS9111-N- 002 EX (PC66641/ 16)	1
342	R20	5905-99-013-6314	D	RESISTOR, FIXED, FILM insulated; 100 ohms; $\pm 2\%$; 1/16W	DEF STAN 59-30(PT1) -2 BS9111-N- 002 FX (PC66365/8)	1
343	R8	5905-99-013-6342	D	RESISTOR, FIXED, FILM insulated; 1.5k ohms, $\pm 2\%$; 1/16W	DEF STAN 59-30(PT1) -1 BS9111-N- 002 1X-56-F (PC66365/ 22)	1
344	R6 R16	5905-99-013-6350	D	RESISTOR, FIXED, FILM insulated; 3.3k ohms, $\pm 2\%$; 1/16W	DEF STAN 59-30(PT1) -2 BS9111-N- 002 FX (PC66365/ 26)	2
345	R7	5905-99-013-6354	D	RESISTOR, FIXED, FILM insulated; 4.7k ohms, $\pm 2\%$; 1/16W	DEF STAN 59-30(PT1) -2 BS9111-N- 002 FX (PC66365/ 28)	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
5-346	RV2	5905-00-053-8048	D	RESISTOR, VARIABLE linear; 5k ohms, $\pm$ 5%; 1W	Bourns 3250W1-502 (PC68191/ 3)	1
347	R11	5905-99-013-6362	D	RESISTOR, FIXED, FILM insulated; 10k ohms, $\pm$ 2%; 1/16W	DEF STAN 59-30(PT1) -2 BS9111-N- 002 FX (PC66365/ 31)	1
348	R9	5905-99-013-6364	D	RESISTOR, FIXED, FILM insulated; 12k ohms, $\pm$ 2%; 1/16W	DEF STAN 59-30(PT1) -1 BS9111-N- 002 1X-56-F (PC66365/ 32)	1
349	R1	5905-99-013-6366	D	RESISTOR, FIXED, FILM insulated; 15k ohms, $\pm$ 2%; 1/16W	DEF STAN 59-30(PT1) -1 BS9111-N- 002 1X-56-F (PC66365/ 33)	1
350	R19	5905-99-013-6368	D	RESISTOR, FIXED, FILM insulated; 18k ohms, $\pm$ 2%; 1/16W	DEF STAN 59-30(PT1) -1 BS9111-N- 002 1X-56-F (PC66365/ 34)	1
351		DELETED				
352		DELETED				
4-353		5940-99-999-3468	C	TERMINAL, LUG 6BA; brass; tinned; 7/16in. lg, 1/4in. w, 1/64in. thk; soldered connection	Ross Courtney & Co Ltd 73 (WIS7924/C Sh.1 Ref.2	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
4-354		5305-99-122-0391	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; cross recess type 1; no.3-48; 0.187in. lg; class 2A thd	B.S.I. BS1981 Table 12 (PF47341/406)	1
355		5310-99-971-3720	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 1/8in. nominal bolt size, 1/4in. od, 0.006in. thk	B.S.I. BS3401 (PF74121/2)	1
356		- - -	C	Tag	WIS7924/C Ref 10	1
357		5305-99-222-5564	Z	SCREW, MACHINE UNF; corrosion resistant steel; pan hd; slot drive; no.0-80 by 1/4in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF42041/408)	1
358		5310-99-944-5857	Z	WASHER, LOCK corrosion resistant steel; split helical ring; 10BA (0.073in.) bolt size; 0.137in. od, 0.028in. thk	Morlock Washer Co Ltd MW10/1 (PF74102/410)	1
359		5310-99-952-0166	Z	NUT, PLAIN, HEXAGON UNF; corrosion resistant steel; chamfered bearing surface; no.0-80, 0.156in. w A/F, 3/64in. h o/a	B.S.I. BS3155 Table 15 (PF40101/400)	1
360		5940-99-901-0430	C	TERMINAL, LUG 2BA; brass; hot tinned; 0.529in. lg, 0.312in. w, 0.450in. h; 3/32in. conductor; soldered connection	Tucker Eyelet Co Ltd G370 (PC77105/6)	1
361		5310-99-946-9796	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 0.208in. max, 0.203in. min. dia hole, 0.380in. max, 0.370in. min od, 0.012in. thk	B.S.I. BS3401 (PF74121/5)	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
4-362	2C5	5910-99-618-5990	C	CAPACITOR, FIXED, MICA DIELECTRIC metallised; plastics case; 250pF, $\pm 10\%$; 500V dc working	Erie Elect Ltd 660-005 (PC18634/1)	1
363	2C6 2C20	5910-00-998-5583	C	CAPACITOR, FIXED, CERAMIC DIELECTRIC insulated, 0.01uF, $\pm 10\%$; 200V dc working	Vitramon Inc VK33BW103K (PC17922/4)	2
364	2C21 2C23	5910-99-197-4261	C	CAPACITOR, FIXED, PLASTICS DIELECTRIC 1.5uF, $\pm 20\%$; 200V dc working	Plastic Capacitors AZ2155W (PC19854/1)	2
365			C	OR CAPACITOR 1.85uF, $\pm 5\%$; 160V	Advance Film Corp CMTFZ Type CTR27/96	2
366	2C30	5910-99-011-8608	C	CAPACITOR, FIXED, CERAMIC DIELECTRIC tub.; non-insulated; 10pF, $\pm 5\%$; 750V dc working	DEF5133-1 CC2-G (PC18106/4)	1
367	2D3 2D4	5961-99-118-6951	C	SEMICONDUCTOR DEVICE SET 2 diodes	A33-4998-50	1pr
368	2R2 2R3	5905-99-013-6346	C	RESISTOR, FIXED, FILM insulated; 2.2k ohms, $\pm 2\%$; 1/16W	DEF STAN 59-30(PT1) -1 BS9111-N-002 1X-56-F (PC66365/24)	2
369	2R14	5905-99-013-6007	C	RESISTOR, FIXED, FILM insulated; 3.3k ohms, $\pm 2\%$; 1/8W	DEF STAN 59-30(PT1) -2 BS9111-N-002 EX (PC66641/50)	

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
4-370	2R15	5905-99-013-6358	C	RESISTOR, FIXED, FILM insulated; 6.8k ohms, $\pm 2\%$; 1/16W	DEF STAN 59-30(PT1)-2 BS9111-N-002 FX (PC66365/29)	1
1-371		5940-99-940-9352	B	TERMINAL, LUG 8BA; brass; tin dipped; 3/8in. lg, 3/16in. w, 1/64 in. h; 25 swg conductor; soldered connection	Ross Courtney & Co Ltd 303 (WIS7924/C Sh.1 Ref.1)	1
372		5305-99-952-0136	Z	SCREW, MACHINE UNC; corrosion resistant steel; csk hd; slot drive; 2-56 by 3/16in. lg; class 2A thd	B.S.I. BS3155 Table 1 (PF47201/406)	1
373		5310-99-947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size; 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHS (PF74102/408)	1
374		5310-99-112-6177	Z	NUT, PLAIN, HEXAGON UNC; corrosion resistant steel; chamfered bearing surface; 4-40, 1/4in. w, A/F, 3/32in. o/a h	B.S.I. BS3155 Table 15 (PF45101/404)	1
375		5325-99-942-3414	B	GROMMET, RUBBER synthetic; 3/16in. dia hole; 5/16in. od groove; 0.070in. w groove; 7/16in. o/a dia; 0.094in. thk flange	BS1767 (PH36501/5)	1
376		5821-99-618-0175	B	CONNECTOR brass; silver plated finish; 5/32in. dia, 25/64 in. lg	A31-7647-50	1
377		5305-99-952-0131	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; 2-56 by 3/16in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/406)	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
1-378		5821-99-618-0015	B	SHUNT COIL AND DRIVE ASSEMBLY	A31-8030-01	1
3-379		5305-99-952-3003	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan no.2 hd; 4(0.112 in.)-40 by 1/2in. lg; class 2A thd	B.S.I. BS1981 Table 12 (PF47441/416)	2
380		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od, 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/406)	2
381		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/406)	2
382		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od, 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/406)	1
383		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/406)	1
384		5310-99-112-6177	Z	NUT, PLAIN, HEXAGON UNC; corrosion resistant steel; chamfered bearing surface; 4-40, 1/4in. w, A/F, 3/32in. o/a h	B.S.I. BS3155 Table 15 (PF45101/404)	1
385		5305-99-101-2950	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; 4-40 by 3/8in. lg, class 2A thd	B.S.I. BS3155 Table 9 (PF47441/412)	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3-386		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od, 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/ 406)	1
387		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	1
388		- - -	C	Bracket	A31-7418-51	1
389		- - -	C	Bracket	A31-7418-50	1
390	2X1	5990-99-624-9827	C	AMPLIFIER, SYNCHRO SIGNAL 1-3/8in. lg; 1-3/16in. w	WIS13052/B Sht.1 Ref.1	1
391		5340-99-618-0171	Z	CLAMP, RIM CLENCHING corrosion resistant steel; 5/16in. lg, 9/32in. w, 3/16in. h	A31-8036-50	2
392		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	2
393	2X2	6105-99-622-3267	C	MOTOR, CONTROL 1-1/16in. dia by 1-5/8in. lg o/a dim OR	PC580015/1	1
394			C	MOTOR, SERVO	VA-31-0010 -1	1
395		5340-99-618-0171	C	CLAMP, RIM CLENCHING corrosion resistant steel; 5/16in. lg, 9/32in. w, 3/16in. h	A31-8036-50	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Ident	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3-396		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	2
397		5821-99-618-0126	C	PANEL, ELECTRONIC CIRCUIT 2-1/4in. lg, 1-9/16in. w, 1-3/8in. h, 11 components	A31-7622-01	1
6-398		- - -	D	Terminal Board	A31-7623-01	1
399		- - -	E	Terminal Board	A31-7624-50	1
400		5940-99-952-0277	E	TERMINAL, POST brass; tinned; 0.086in. dia, 0.297in. lg	PH77001/1	24
401		- - -	E	Terminal, Lug	W70330 Sh.1 Ref.1	2
402		5970-99-951-2847	D	INSULATOR, STANDOFF cylindrical pillar type; plastics; 1/4in. dia; 1/16in. thk	A30-3624-50	1
403	2C8 2C10 2C11 2C35	5910-00-998-5583	D	CAPACITOR, FIXED, CERAMIC DIELECTRIC insulated, 0.01uF, $\pm 10\%$; 200V dc working	Vitramon Inc VK33BW103K (PC17922/ 4)	4
404	2C7	5910-99-142-4714	D	CAPACITOR, FIXED, PLASTICS DIELECTRIC metallised; rectangular case; insulated; 0.22uF, $\pm 20\%$; 100V dc working	S.T. & C. Ltd PMFO.22M1 00 (PC19896/5)	1
405	2C9 2C12	5910-99-197-4261	D	CAPACITOR, FIXED, PLASTICS DIELECTRIC 1.5uF, $\pm 20\%$; 200V dc working	Plastic Capacitors AZ2155W (PC19854/1)	2
406			D	OR CAPACITOR 1.85uF, $\pm 5\%$; 160V	Advance Film Corp CMTF2 Type CTR27/96	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
6-407	2C40	- - -	D	Capacitor, Plastics, Metallised 0.1uF, $\pm$ 20%; 100V dc working (ALTERNATIVE:Facel Type PS with 10mm Lead Spacing)	PC19896/1	1
408	2R4 2R23	5905-99-013-6354	D	RESISTOR, FIXED, FILM insulated; 4.7k ohms, $\pm$ 2%; 1/16W	DEF STAN 59-30(PT1) -2 BS9111-N-002 FX (PC66365/28)	2
409	2D5	- - -	D	Diode	Texas 1S7047A	1
410	2VT1	5961-00-901-3270	D	TRANSISTOR	E.I.A. 3N79	1
411	2L6	- - -	D	Inductor, Radio Frequency 470uH, $\pm$ 10%;	PC473025/ 43	1
412	2L4	- - -	D	Inductor, Radio Frequency 470uH, $\pm$ 10%;	PC473019/33	1
3-413		5340-99-618-0219	C	POST, ELECTRICAL-MECHANICAL EQUIPMENT corrosion resistant steel; hex sect; 1-7/64in. post lg; tapped 4-40 UNC by 13/64in. lg 1st end, thd 4-40 UNC by 1/8in. lg 2nd end	A31-7633-50	1
414		5821-99-630-0877	C	PANEL, ELECTRONIC CIRCUIT srpb; 2-5/16in. lg, 1-3/8 in. w, 1/4in. h approx o/a dim; 13 components	A33-3414-01	1
415		5305-99-945-1982	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; 4-40 by 1/4in. lg; class 2A thd	B.S.I. BS1981 Table 12 (PF47441/ 408)	3
416		5310-99-971-3720	Z	WASHER, SPRING TENSION beryllium copper; cadmium plated; 1/8in. nominal bolt size, 1/4in. od, 0.006in. thk	B.S.I. BS3401 (PF74121/2)	3

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
7-417		- - -	D	Terminal Board	A33-3752-50	1
418		5940-99-952-0277	D	TERMINAL, POST brass; tinned; 0.086in. dia, 0.297in. lg	PH77001/1	11
419	2C41	5910-99-013-0510	D	CAPACITOR, FIXED, ELECTROLYTIC tantalum electrode; sintered; tub. metal case; insulated; 6.8uF, $\pm$ 20%; 35V dc working	DEF5134-A-1 CET30-B (PC18415/6)	1
420	2C42	5910-99-015-8887	D	CAPACITOR, FIXED, ELECTROLYTIC tantalum electrode; sintered; tub. metal case; insulated; 15uF, $\pm$ 10%; 13V dc working	BS9073-N-001 C1HBAB (PC18415/7)	1
421	2C43 2C47 2C48 2C49	5910-00-998-5583	D	CAPACITOR, FIXED, CERAMIC DIELECTRIC insulated; 0.01uF, $\pm$ 10%; 200V dc working	Vitramon Inc VK33BW1031C (PC17922/4)	4
422	2C46	5910-99-107-6631	D	CAPACITOR, FIXED, CERAMIC DIELECTRIC rect; insulated; 0.1uF, $\pm$ 10%; 100V dc working	Vitramon Laborator- ies Ltd VK30BX104K (PC17754/ 12)	1
423	2R24	5905-99-013-6035	D	RESISTOR, FIXED, FILM insulated; 47k ohms, $\pm$ 2%; 1/8W	DEF STAN 59-30(PT1) -2 BS9111-N-002 EX (PC66641/ 81)	1
424	2R25	5905-99-013-6314	D	RESISTOR, FIXED, FILM insulated; 100 ohms, $\pm$ 2%; 1/16W	DEF STAN 59-30(PT1) -2 BS9111-N-002 FX (PC66365/8)	1
425	2D14 to 2D17	5961-15-051-8994	D	SEMICONDUCTOR DEVICE, DIODE	Fairchild BAY72	4

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3-426		5340-99-630-1109	C	POST, ELECTRICAL-MECHANICAL EQUIPMENT corrosion resistant steel; hex sect; 3/4in. lg post; int. thd 4-40 UNC 1/4in. lg; ext. thd 4-40 UNC 15/64in. lg	A33-3413-50	3
427		5821-99-618-0218	C	CONTACT ASSEMBLY, ELECTRICAL 1-1/8in. lg, 9/16in. w, 7/16in. h	A31-7430-01	1
428		5305-99-122-0526	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.2-56 by 1/4in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/ 408)	2
429		5310-99-947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size, 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHS (PF74102/ 408)	2
430		5310-99-194-8147	Z	WASHER, FLAT corrosion resistant steel; rd; 3/32in. id, 3/16in. od, by 1/64in. thk	B.S.I. BS3410 Table 1 (PF74011/ 408)	2
431		- - -	D	Block	A31-7424-50	1
432		- - -	D	Spring Contact	A31-7429-50	1
433		- - -	D	Spring Contact	A31-7429-51	1
434		- - -	D	Contact, Rivet, Domed	PC278002/1	2
435		5821-99-618-0174	C	GEARPLATE ASSEMBLY 3in. lg, 2-5/16in. w, 1-1/2in. h o/a dim.	A31-7450-01	1
436		- - -	D	Plate	A31-7451-50	1
437		- - -	D	Spacer	A31-7453-50	1
438		- - -	D	Plate	A31-7452-50	1

Chap.2-2-2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3- 439 440		- - -	Z	Dowel Pin	A31-7456-51	2
		- - -	Z	Screw, Machine 4-40 UNC; pan hd; 1-1/8in. lg	PF47441/434	2
441		5310-99- 955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od; 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/ 406)	4
442		5310-99- 947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	2
443		5310-99- 112-6177	Z	NUT, PLAIN, HEXAGON UNC; corrosion resistant steel; chamfered bearing surface; 4-40, 1/4in. w, A/F, 3/32in. o/a h	B.S.I. BS3155 Table 15 (PF45101/ 404)	2
444		- - -	D	Spacer, Screwed	A31-7632-50	1
445		5310-99- 955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od; 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/ 406)	1
446		5310-99- 947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	1
447		5310-99- 112-6177	Z	NUT, PLAIN, HEXAGON UNC; corrosion resistant steel; chamfered bearing surface; 4-40, 1/4in. w, A/F, 3/32in. o/a h	B.S.I. BS3155 Table 15 (PF45101/ 404)	1
448		- - -	D	Spacer, Screwed	A31-7632-51	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3-449		- - -	Z	Screw, Machine 4-40 UNC; pan hd; 1-1/8in. lg	PF47441/434	1
450		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od; 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/406)	1
451		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/406)	1
452		5310-99-112-6177	Z	NUT, PLAIN, HEXAGON UNC; corrosion resistant steel; chamfered bearing surface; 4-40, 1/4in. w, A/F, 3/32in. o/a h	B.S.I. BS3155 Table 15 (PF45101/404)	1
453		5821-99-618-0040	C	COIL ASSEMBLY 2-11/16in. lg, 1-7/16in. w, 1-7/16in. h o/a dim.	A31-6316-01	1
454		- - -	D	Slip Ring	A31-6237-50	1
455		- - -	D	Bearing, Ball	PC12608/42	1
456		- - -	D	Washer, Laminated	A31-6319-50	1
457		- - -	D	Gear	A31-6021-50	1
458		- - -	D	Holder	A31-7756-51	1
459		- - -	D	Core Ferrite Rod	PC25059/5	3
460		- - -	D	Coil Former	A31-6213-50	1
461		- - -	D	Wire Silver	PW1021/2	A/R
462		- - -	D	Eyelet	WIS3090/B Ref.23	2
463		- - -	D	Sleeving	PM9054/001	A/R
464		- - -	D	Spigot	A31-6217-50	1

COUPLER, ANTENNA
5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3-465		- - -	D	Slip Ring	A31-6237-50	1
466		- - -	D	Bearing, Ball	PC12608/42	1
467		- - -	D	Shaft	A31-6232-50	1
468		3020-99-618-8786	C	GEAR, SPUR aluminium nickel-iron bronze; 18 teeth; 1/8in. id, 23/32in. od, 19/64in. lg	A31-6296-50	1
469		5315-99-633-7899	Z	PIN, SPRING corrosion resistant steel; passivated finish; 3/64in. dia, 1/4in. lg	Spirol Inds Ltd 3/64 by 1/4 MCP (PF60026/ 108)	1
470		3110-99-618-3418	C	BEARING, BALL, JOURNAL, single row; 1/8in. bore; 23/64in. od, 9/64in. w, OOO fit (Alternative: VA-0001-6)	B.M.B. RCL1/8G 3AFZZ2 DOTSS01TO (PC12608/ 43)	1
471		- - -	C	Stop Assembly	A31-8239-01	1
472		- - -	D	Spindle	A31-7198-50	1
473		- - -	D	Stop Assembly	A31-7208-01	2
474		5315-99-952-0173	Z	PIN, SPRING steel; oxidised blue; 0.063 in. nominal dia, 0.250in. lg	Grover Co TP116, 1/4 (PF70011/ 001)	2
475		- - -	E	Stop	A31-7206-50	1
476		- - -	E	Pin	A31-7199-50	1
477		- - -	D	Stop Nut Assembly	A31-7203-01	1
478		- - -	E	Stop Nut	A31-7200-50	1
479		- - -	E	Pin	A31-7199-51	2
480		3020-99-618-0217	C	GEAR, SPUR corrosion resistant steel; 80 teeth; 0.165in. bore; 1-1/32in. od, 21/64in. lg	A31-7089-50	1

COUPLER, ANTENNA
5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Ident	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3-481		5315-99-633-7899	Z	PIN, SPRING corrosion resistant steel; passivated finish; 3/64in. dia, 1/4in. lg	Spirol Inds Ltd 3/64 by 1/4 MCP (PF70026/ 108)	1
482		5821-99-618-0215	C	GEAR CLUSTER, SPUR 2 gears; 1-3/32in. od, 1-5/16in. o/a lg	A31-7470-01	1
483		— — —	C	Plate	A31-7449-01	1
484		5305-99-122-0410	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan no.2 hd; slot drive; no.4 by 7/16in. lg; class 2A thd	B.S.I. BS1981 Table 12 (PF47441/ 414)	4
485		5310-99-947-8520	Z	WASHER, LOCK corrosion resistant steel; single coil; 1/8in. bolt size; 13/64in. od, 1/32in. thk	Morlock Washer Co Ltd 6BA Single Coil (PF74102/ 406)	4
486		5310-99-955-7539	Z	WASHER, FLAT corrosion resistant steel; rd; enamel coated; 1/8in. id (6BA), 15/64in. od; 0.024in. thk	B.S.I. BS3410 Table 1 (PF74011/ 406)	4
487		— — —	D	Plate	A31-7449-50	1
488		— — —	D	Insert 2-56 UNC	PF45091/17	5
489		5821-99-618-0124	C	CONTACT ASSEMBLY, ELECTRICAL 1-3/4in. lg, 9/16in. w, 1/4 in. h	A31-7428-01	1
490		5305-99-122-0526	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.2-56 by 1/4in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/ 408)	2
491		5310-99-947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size, 0.159 in. od, 0.028in. thk	Morlock Washer Co Ltd MWHS (PF74102/ 408)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig- Item	Cct Ref.	NATO Stock No. or Catalogue No.	Ident	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3- 492		5310-99- 194-8147	Z	WASHER, FLAT corrosion resistant steel; rd; 3/32in. id, 3/16in. od, by 1/64in. thk	B.S.I. BS3410 Table 1 (PF74011/ 408)	2
493		- - -	D	Block	A31-7426-50	1
494		- - -	D	Spring Contact	A31-7427-50	2
495		- - -	D	Contact Rivet, Domed	PC278002/1	2
496		5360-99- 618-0007	C	SPRING, HELICAL, EXTENSION corrosion resistant steel; 5/32in. od, 25/64in. o/a lg; hook ends	A33-1256-50	1
497		5315-99- 107-1140	Z	PIN, SPRING steel; cadmium plated; 4mm lg, 1mm dia, 0.200mm thk	PF70012/001	1
498		5305-99- 618-1467	Z	SCREW, SHOULDER UNF; corrosion resistant steel; pan no.2 hd; slot drive; 0-80 thd size, 19/64 in. lg; 1/8in. thd lg	A33-0431-50	1
499		3110-99- 618-3418	C	BEARING, BALL, JOURNAL single row; 1/8in. bore; 23/64in. od, 9/64in. w; 000 fit (Alternative: VA-0001-6)	B.M.B. RCL1/8G 3AFZZ2 DOTSS01TO (PC12608/ 43)	1
500		5940-99- 940-9352	C	TERMINAL, LUG 8BA; brass; tin dipped; 3/8in. lg, 3/16in. w, 1/64 in. h; 25 swg conductor; soldered connection	Ross Courtney & Co Ltd 303 (WIS7924/C Sh.1 Ref.1)	2
501		5305-99- 947-3260	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd no.2; slot drive; 2-56 by 1/8in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/ 404)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indnt	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3-502		5310-99-947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA (0.095in.) bolt size, 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHS (PF74102/ 408)	2
503		5821-99-624-0225	C	WHEEL ASSEMBLY brass; silver plated; 2-3/32in. o/a lg; 2in. w; 7/16in. thk	A33-0426-01	1
504		5305-99-618-1459	Z	SCREW, SHOULDER UNC; corrosion resistant steel; flat head; slot drive; 2-56 thd size, 19/64 in. lg, 3/32in. thd lg	A33-0430-50	1
505		5305-99-618-1464	Z	SCREW, SHOULDER UNC; corrosion resistant steel; pan no.2 hd; slot drive; 2-56 thd size; 11/32in. lg; 5/32in. thd lg	A33-0429-50	1
506		5365-99-618-0199	Z	SHIM brass; solid; 1/8in. id, 9/32in. od, 0.005in. thk	A33-0425-51	12
507		- - -	D	Arm	A33-0427-50	1
508		- - -	D	Arm	A33-0428-50	1
509		- - -	D	Spindle	A31-6452-50	1
510		- - -	D	Roller Assembly	A31-7789-01	1
511		5821-99-618-0018	E	ROLLER elkonite 2% graphite; 5/8in. od, 17/32in. lg	A31-7790-50	1
512		5970-99-618-0207	E	INSULATOR, BUSHING srbf; 5/8in. od, 1/4in. lg o/a; 7/32in. dia hole	A31-7791-50	1
513		- - -	D	Collar	A31-8572-50	1
514		- - -	C	Spacer Assembly	A31-7455-01	1

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3-515		- - -	D	Spacer	A31-7441-50	1
516		- - -	D	Dowel Pin	A31-7456-50	1
517		5340-99-618-4028	D	INSERT, SCREW THREAD corrosion resistant steel; coiled wire type; 4-40 UNC; 7/32in. nom o/a lg	Armstrong Patents Ltd 3585-04 CNO-224in. (PF45091/7)	4
518		- - -	C	Spacer Assembly	A31-7454-01	1
519		- - -	D	Spacer	A31-7442-50	1
520		- - -	D	Dowel Pin	A31-7456-50	1
521		5340-99-618-4028	D	INSERT, SCREW THREAD corrosion resistant steel; coiled wire type; 4-40 UNC; 7/32in. nom o/a lg	Armstrong Patents Ltd 3585-04 CNO.224.in. (PF45091/7)	4
522	2SA 2SG	5930-99-932-2408	C	SWITCH, SENSITIVE plunger type; single pole, double throw; 1 position momentary	Burgess Micro Switch Co Ltd V4-T2 (PC71613/2)	2
523		5930-99-932-2577	C	ADAPTOR, SWITCH ACTUATOR spring leaf; non adjustable	Burgess Micro Switch Co Ltd V4L1 (PC73726/1)	2
524		- - -	C	Mounting Plate	A33-1081-50	1
525		5305-99-122-0526	Z	SCREW, MACHINE UNC; corrosion resistant steel; pan hd; slot drive; no.2-56 by 1/4in. lg; class 2A thd	B.S.I. BS3155 Table 9 (PF47241/ 408)	2
526		5310-99-194-8147	Z	WASHER, FLAT corrosion resistant steel; rd; 3/32in. id, 3/16in. od, by 1/64in. thk	B.S.I. BS3410 Table 1 (PF74011/ 408)	2

COUPLER, ANTENNA 5821-99-957-2082

Fig. Item	Cct Ref.	NATO Stock No. or Catalogue No.	Indent	Item Name and Description	Maker's Part No./ Drawing No.	No. off
3- 527		5310-99- 947-8521	Z	WASHER, LOCK corrosion resistant steel; split helical ring; no.8BA, (0.095in.) bolt size, 0.159in. od, 0.028in. thk	Morlock Washer Co Ltd MWHs (PF74102/ 408)	2
+-- 528		6145-99- 105-6122	B	CABLE, RADIO FREQUENCY co-axial; 50 ohms; PTFE dielectric; single braid; PTFE jacket; 0.173in. dia o/a	B.S.I. BS2316 (PW7402/1)	A/R
+-- 529		- - -	B	Cable Assembly	A31-8790-01	1
+-- 530		6145-99- 105-6122	C	CABLE, RADIO FREQUENCY co-axial; 50 ohms; PTFE dielectric; single braid; PTFE jacket; 0.173in. dia o/a	B.S.I. BS2316 (PW7402/1)	A/R
+-- 531		- - -	C	Sleeving ptfe, natural		A/R

Chap.2-2-2

AP 116D-0121-3A1

[illegible]

