

OLYMPUS 201 SERIESSECTION 23TANK PRESSURISATION SYSTEMPurpose

The tank pressurisation system forms two useful functions. These are namely:-

- (a) Prevents loss of fuel due to boiling effect of altitude.
- (b) Prevents the collapse of emptying fuel tanks.

The system maintains the pressure in the tank between 1.82 and 2.3 p.s.i. above atmospheric pressure. The pressurising medium is air bleed from the engine compressor.

Components

For each group of tanks a control panel carrying nine components is fitted at the rear of each main wheel bay. Two vent valves per tank group are utilised one being on the top surface of the fuselage, the other being in the wing forward of the gap in the elevators. The nine components on the control panel are:-

- (a) Solenoid Depressurisation Valve, which is the "ON"/"OFF" switch for the whole system. It directs to the Master Control Valve, Tank Pressure "ON" or Servo air pressure "OFF".
- (b) Master Control Valve, which is the brain of the system. It allows the Air and Gas Valves and the Vent Valves to control the tank pressure, under the influence of the two working pressures restricted and servo.
- (c) Air and Gas Valve, Which is connected to the supplies of air and nitrogen gas, and allow either or both to flow into the system.
- (d) Filter Restrictor, obtains from the engine air supply a filtered flow of air to the Pressure reducing valve and a Restricted flow of air to a four way connection.
- (e) Pressure Reducing Valve, provides a supply of Servo pressure air from 9 to 12.5 p.s.i.
- (f) Air Drier, fitted before the filter restrictor to prevent ice formation and corrosion.
- (g) Fuel Traps, isolates all components from the possibility of fuel contamination.
- (h) Non Return Valve

Operation. Five distinct conditions are available during the operation of the system. There are four conditions with the solenoid depressurisation valve "ON" and one when it is "OFF".

- (i) Tank Pressurisation "OFF"

Static and Servo act on M.C.V. Diaphragm.  
M.C.V. Ports - A is Closed.  
N is Venting.  
V is Venting.

/Ensuring Air.....

SECTION 23

TANK PRESSURISATION SYSTEM

Ensuring Air Valve is closed  
 Nitrogen Valve is closed  
 Vent Valve is open.

(ii) Tank Pressurisation "ON"

(a) On Starting Engines.

Static and Low Tank Pressure act on M.C.V. Diaphragm.

M.C.V. Ports    A is Venting  
                   N is Closed  
                   V is Closed

- Ensuring 1) Air Valve is open allowing pressure into system.  
 ii) Nitrogen Valve is open to allow nitrogen into system if required.  
 iii) Vent Valve is closed to increase tank pressure.

(b) Tank Pressure Balanced.

Static and correct tank pressures act on M.C.V. Diaphragm.

M.C.V. Ports    A is Closed  
                   N is Closed  
                   V is Closed

- Ensuring 1) Air Valve is closed  
 ii) Nitrogen Valve is Open  
 iii) Vent Valve is closed  
 iv) Tank Pressure being maintained

(c) Climbing Condition

Low Static and correct tank pressure act on M.C.V. Diaphragm.

M.C.V. Ports    A is closed  
                   N is venting  
                   V is venting

- Ensuring 1) Air Valve is closed.  
 ii) Nitrogen Valve is closed.  
 iii) Vent Valve is open.  
 iv) Tank Pressure is released until balanced state is reached.

It should be noted that this climb condition can be caused by either a decrease in Static pressure or an increase in tank pressure. The reverse condition of descending is similar to condition (a) above.

(d) Diving Condition

\* Static and less than Static act on the M.C.V. Diaphragm.

M.C.V. Ports    A is Venting  
                   N is Closed  
                   V is Venting

/Ensuring 1) .....

SECTION 23TANK PRESSURISATION SYSTEM

- Ensuring
- i) Air Valve is open
  - ii) Nitrogen Valve is open
  - iii) Vent Valve is open
  - iv) Allowing tank pressure to be increased from all valves to regain balanced state.

Servicing.

Periodical examination of the silica-gel crystals in the Air-drier will ensure that the system is free from moisture laden air. The gel when serviceable, is deep blue in colour and changes from this through bluish purple to reddish purple to a deep pink when saturated. The crystals themselves are changed when required. Graphite grease is to be used on all threads. A table, in A.P. 4505 'B' Vol. 1 Book 1 Sect. 4 Chap. 6 lists the correct instructions for tightening the unions. The unions should be tight under the conditions specified and leaks should not be eliminated by undue tightening of the union.

Testing.

Air for testing may be either supplied by ground running one of the engines or using a ground storage air cylinder. When using an engine the R.P.M. must be at least 56% to initiate pressurisation and then reduced to 36%. Using ground supply connected to the connections labelled "compressor Air" on the test panel in the main wheel undercarriage bays necessitates the separate checking of the engine and tank pressurisation air feed lines.

(i) By Engine Supply

- (a) Attach gauge to Tank Pressure Test connection on Test Panel. Remove cover from Servo Air Exhaust Cock.
- (b) Run appropriate engine and switch "ON" Tank Pressurisation.
- (c) Check pressure gauge reads 2.2 to 2.5 p.s.i. As fuel is used a slow hunt will occur on gauge.
- (d) Switch Tank Pressurisation "OFF" and ensure gauge reads atmospheric pressure.
- (e) Switch Tank Pressurisation "ON" and increase R.P.M. to Take-off, held for 30 secs. Ensure that gauge reads as in (c).
- (f) Reduce r.p.m. to idling and check that the reading on the gauge remains steady.
- (g) Switch Tank Pressurisation "OFF" and increase r.p.m. and the switch "ON" again.
- (h) When Tank Pressure attains reading in (e) above slightly open the Servo Air Exhaust Cock.
- (j) Check that Tank Pressure increase as cock is opened and that emergency outward venting occurs at pressures between 2.65 and 3.0. p.s.i. Venting should continue as fuel is used.
- (k) Stop engine, remove gauge and refit blanks.

/(ii) Using Ground Supply.

SECTION 23

TANK PRESSURISATION SYSTEM

(ii) Using Ground Supply

The method is similar to that already described however it is essential that the fuel tanks contain 80% fuel load to limit the amount of air required. Approximately 60,000 litres of air will be needed and the standard charging cylinder ~~contains~~ contains 15,850 litres at 3,600 p.s.i.

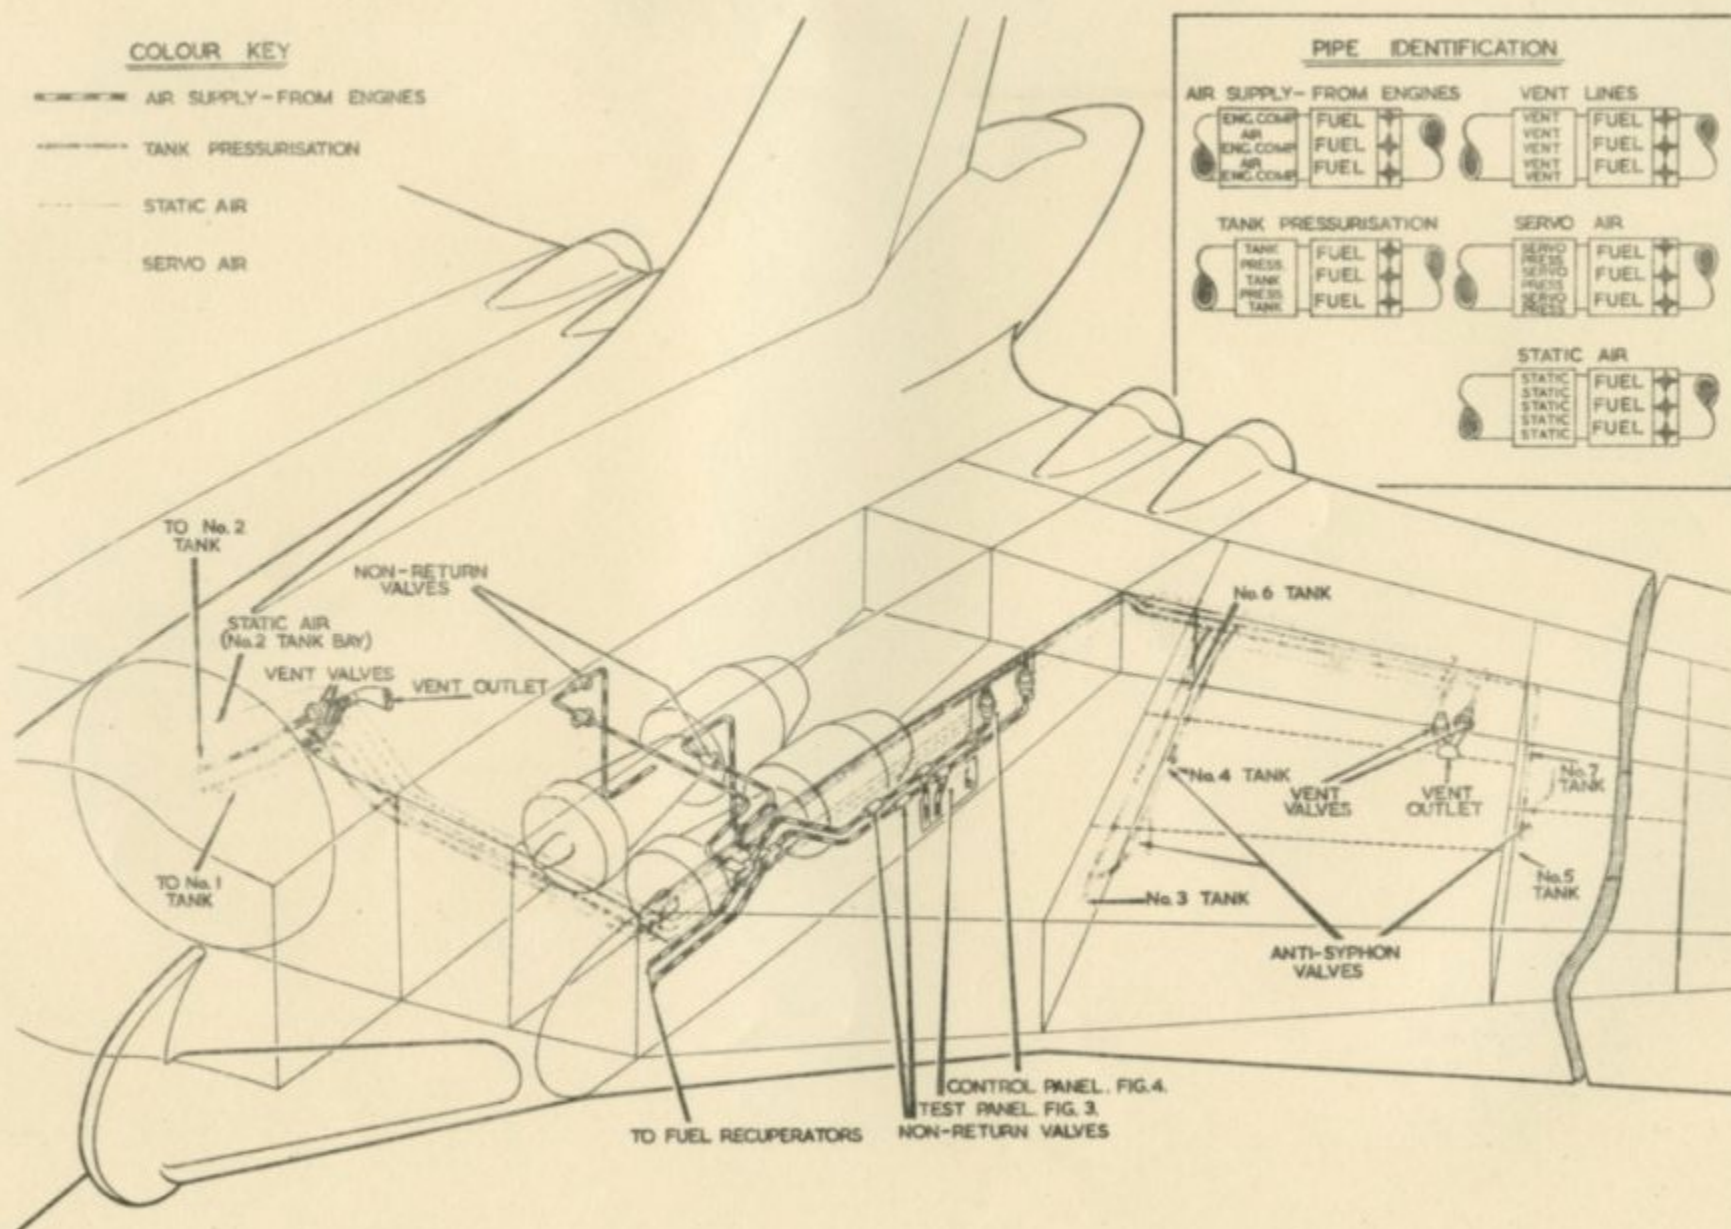


Fig. 2 Fuel tank pressurisation system installation

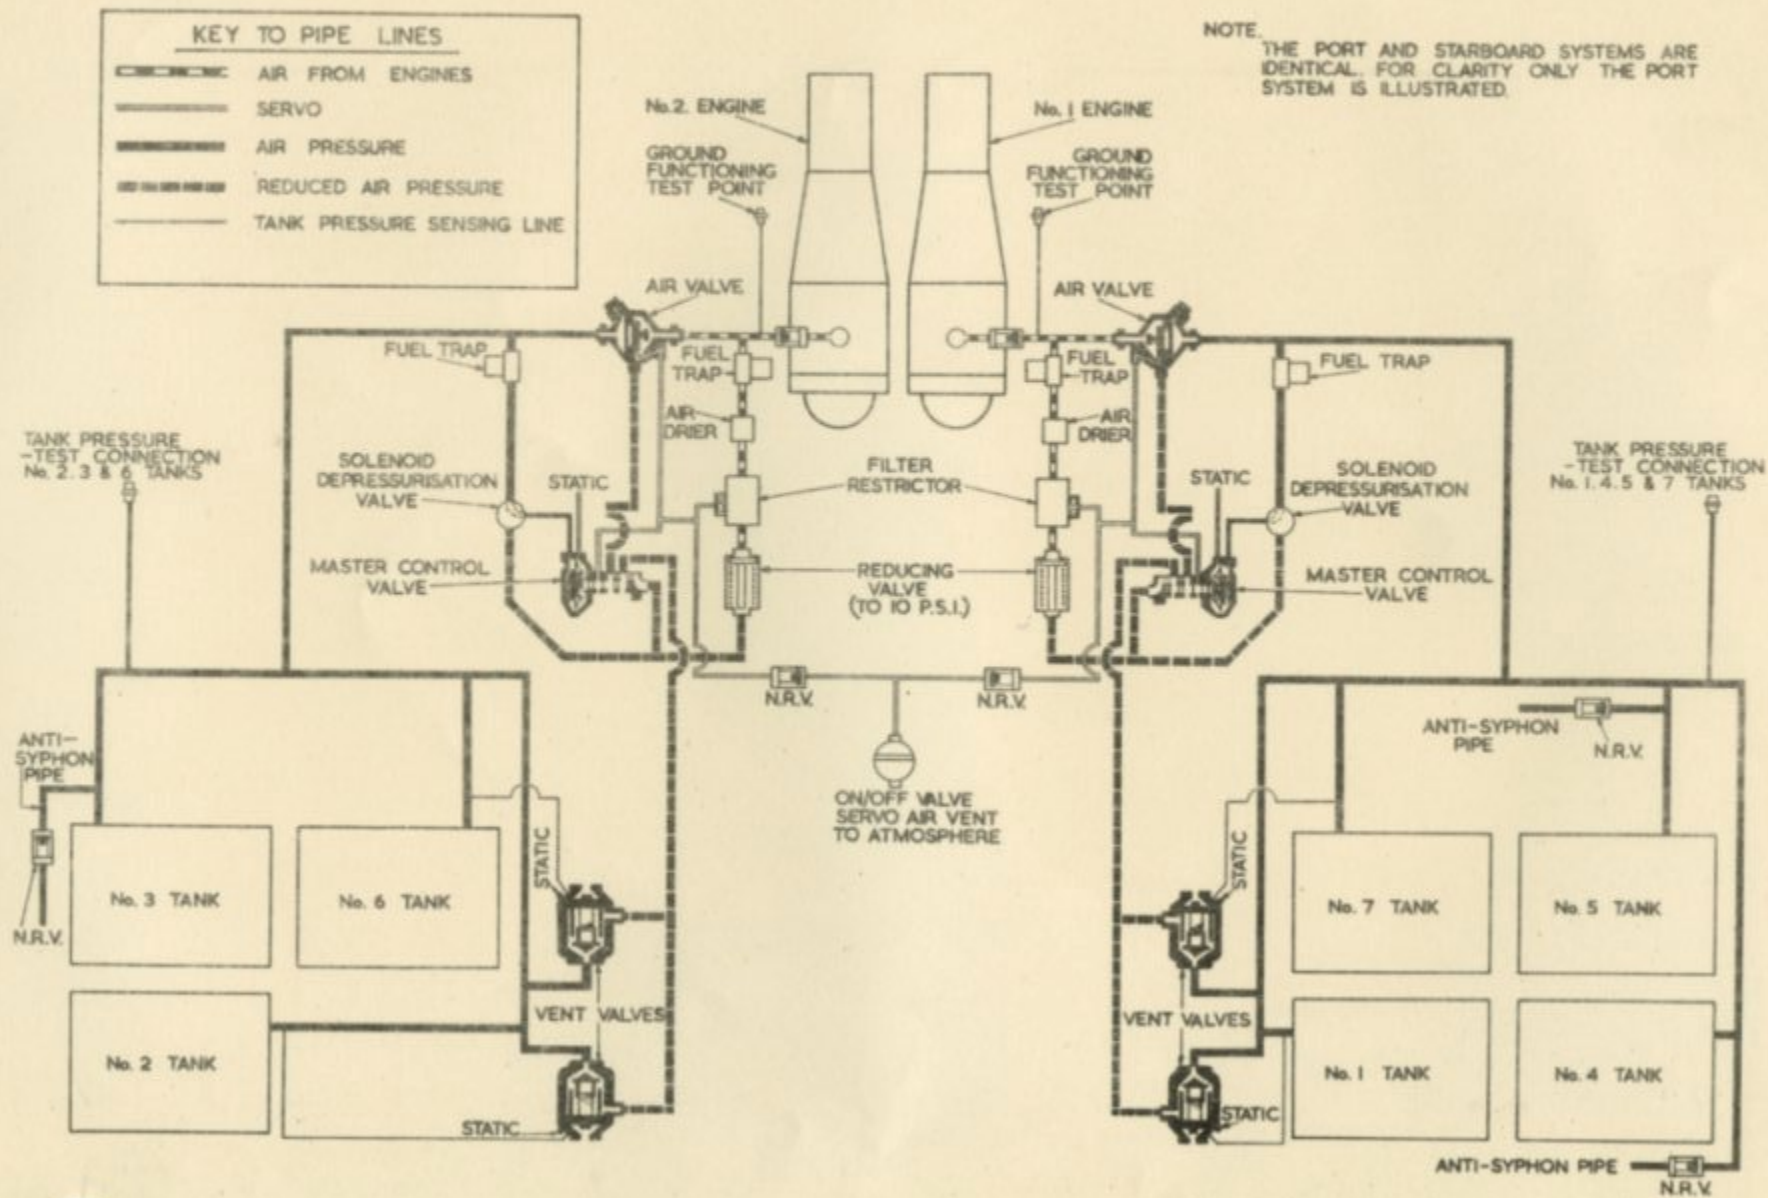


Fig. 1 Fuel tank pressurisation diagram


## VULCAN B. MK. 2



A·V·ROE & CO LIMITED  
MANCHESTER

## FUEL SYSTEM

TANK PRESSURISATION  
MOD 17 INCORPORATED

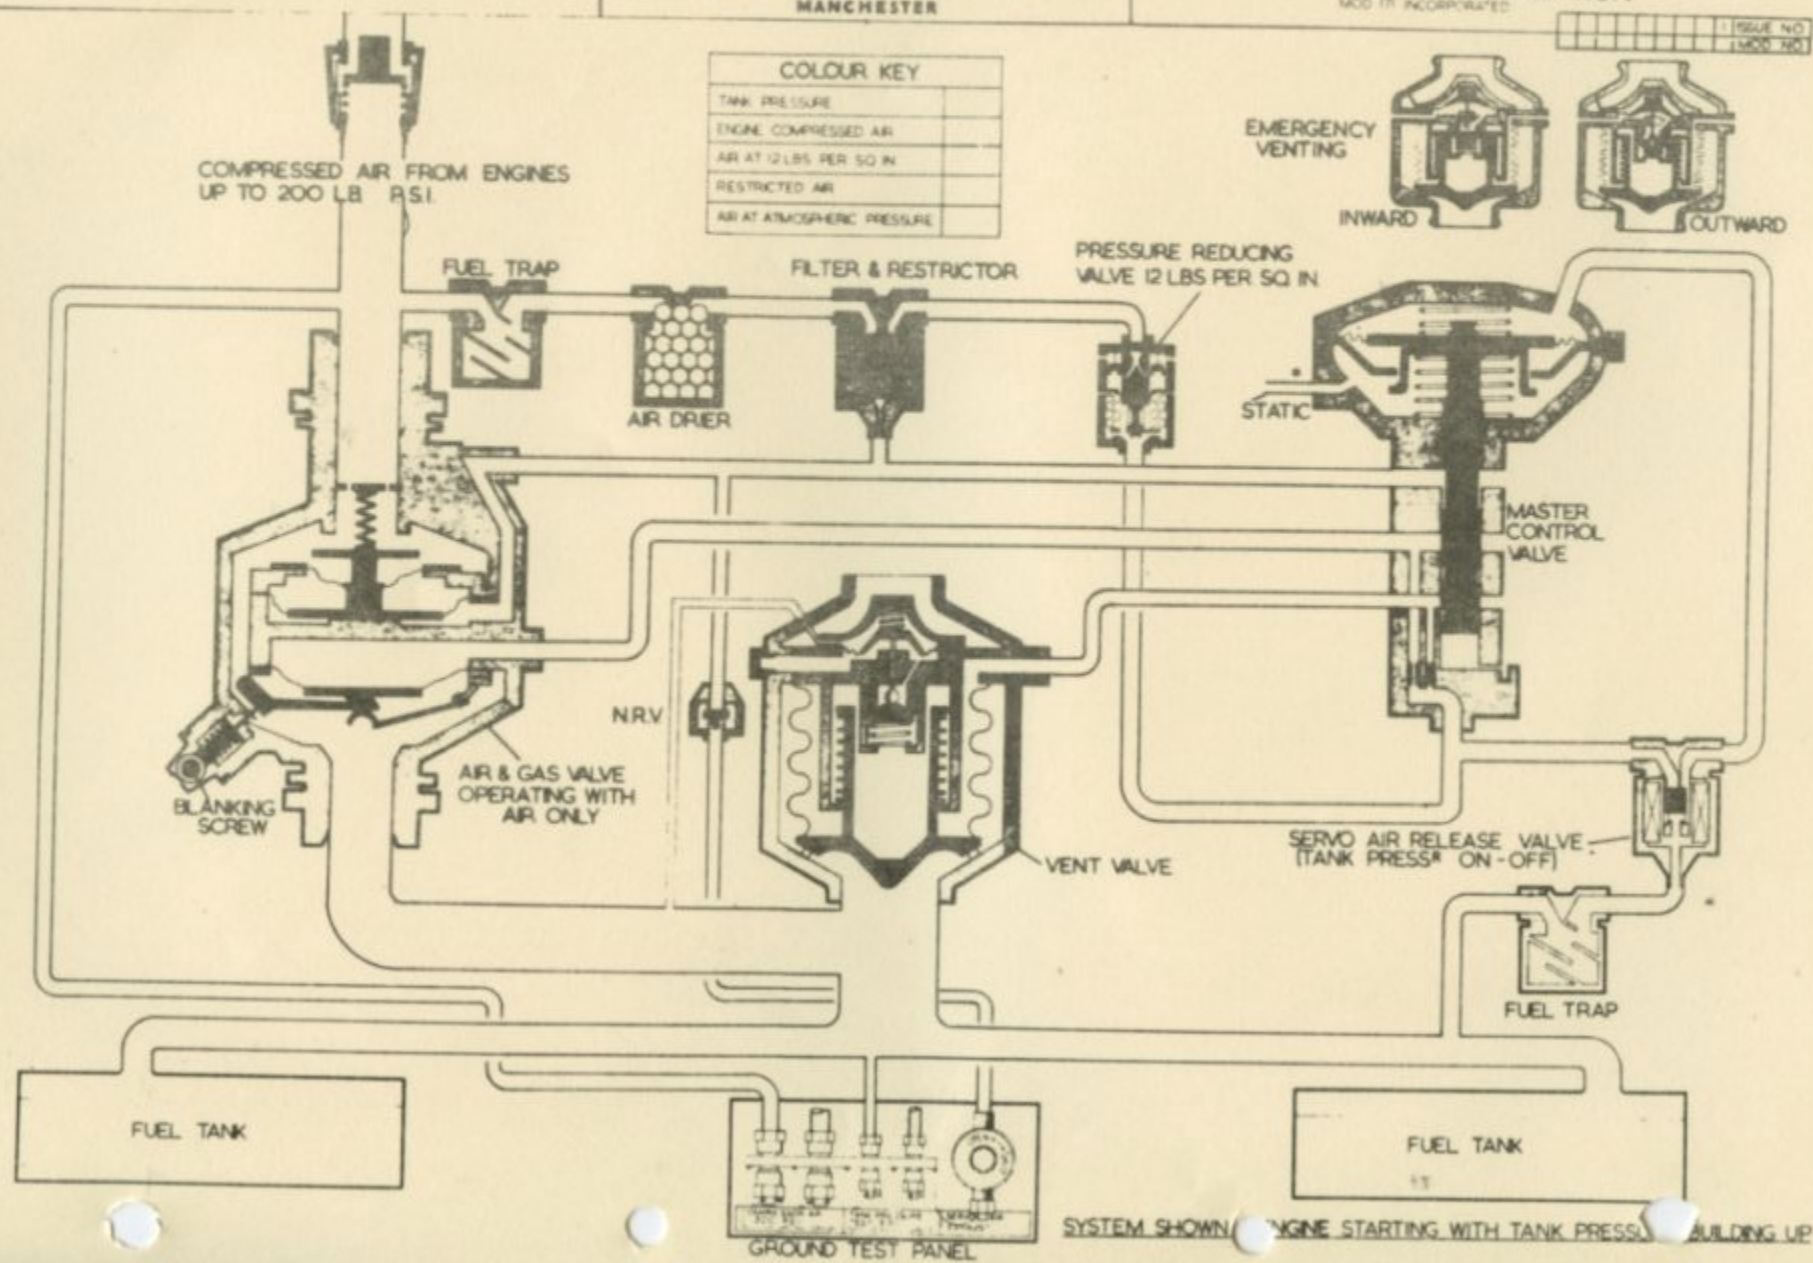

# BCVSS

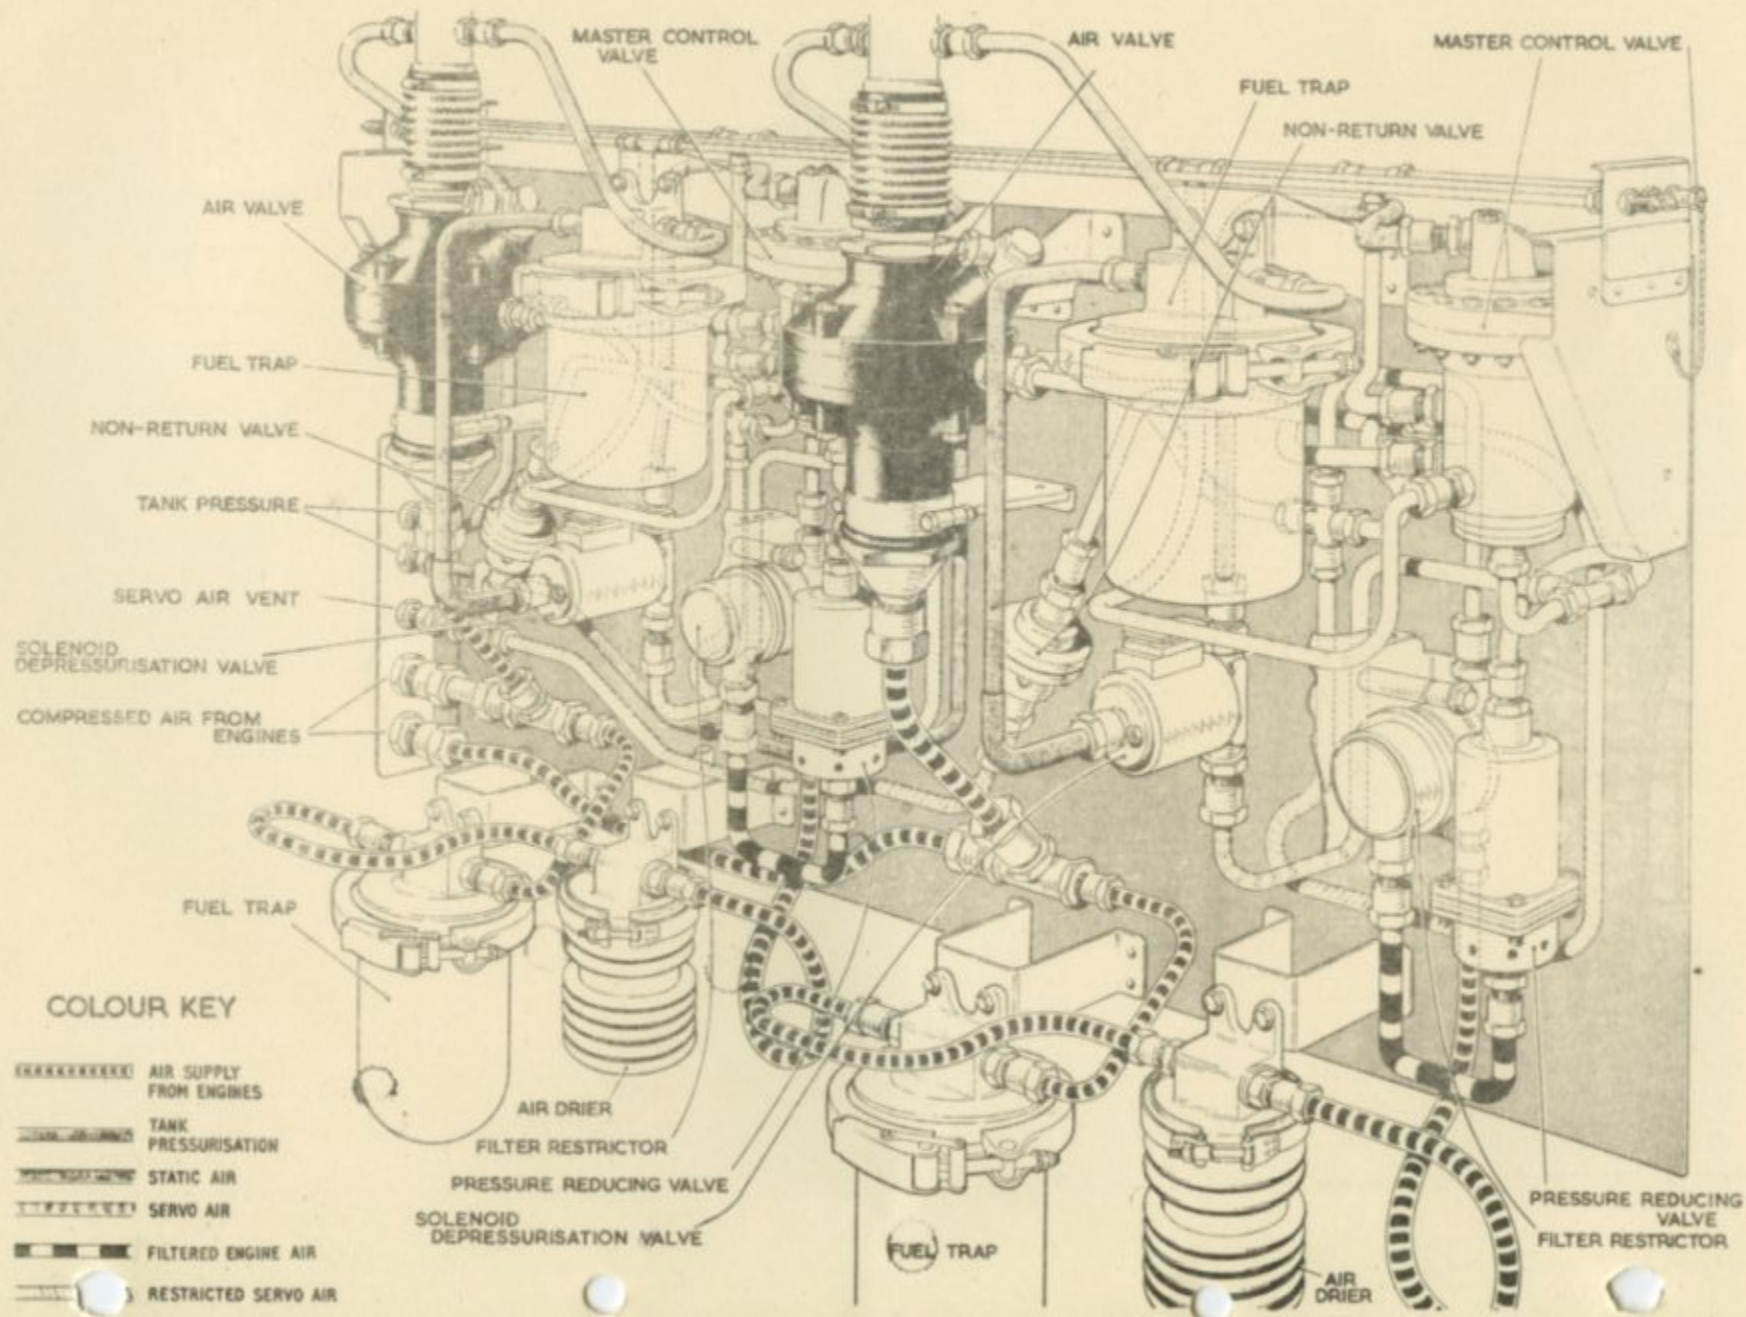


Fig. 4 Tank pressurisation control panel



This file was downloaded  
from the RTFM Library.

Link: [www.scottbouch.com/rtfm](http://www.scottbouch.com/rtfm)

Please see site for usage terms,  
and more aircraft documents.