

UNDERCARRIAGE—NOSE WHEEL DOOR OPERATING GEAR

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Store	Place No.
		1 2 3 4 5				
	B.179108	NOSE WHEEL DOOR OPERATING GEAR, ASSEMBLY	—	—		
1531	F.152672	Bolt, jack attachment to frame 3	1	S.2	C.	RE.1
1533	F.156330	Bolt, jack attachment to lever	1	S.2	C.	RE.1
3115	A.178904	Bracket, mounting, for cross shaft, port, group ...	1	—	MR/B	RE.1
117	F.178906	Bush	1	BSS.369	C.	RE.1
3116	A.178905	Bracket, mounting, for cross shaft, starboard, group	1	—	MR.B	RE.1
117	F.178906	Bush	1	BSS.369	C.	RE.1
	Dowty-07584.Y.A02	Jack, door	1	—	A.	
8101	A.218101	Rod, connecting, group (Mod. 552)	2	—	C.	RE.1
	AGS.589/3/PB	Ball	2	—	C.	RE.1
5859	F.208205	Locknut, L.H. (Linksgewinde)	1	S.1	C.	RE.1
5860	F.208206	Locknut, R.H. (Rechtsgewinde)	1	S.1	C.	RE.1
5862	F.204656	Pin	1	S.96.B or S.95.B	C.	RE.1
5863	F.204657	Pin	1	S.96.B or S.95.B	C.	RE.1
	SP 41/C	Sich.-Scheibe	2			RE.1
	SP 10/C	U-Scheibe	2			RE.1
8103	A 218085	Rod, end, complete (Mod. 552)	1	S.1	C.	RE.1
	AGS 589/3/PB	Lager	1	Bz		RE.1
8102	F.218084	Turnbuckle (Mod. 552)	1	S.1	C.	RE.1
8104	F.218070	Washer, locking (Mod. 552)	1	S.1	C.	RE.1
8124	B.215854	Shaft and lever, group	1	—	B.	RE.1
	STD 532/15-S	Ferrule	8	S.95.B or S.96.B	C.	4
	STD 532/15-1S	Büchse, 1. Uebermass, 6,5 mm	n.B.			
	STD 532/15-2S	Büchse, 2. Uebermass, 6,8 mm	n.B.			
7063	A.208999	Lever	1	S.3	C.	RE.1
125	A.178907	Lever, for door connection	1	Stpg. 1699	C.	RE.1
126	A.178908	Lever, for door and jack	1	Stpg. 1700	C.	RE.1
	A.178909	Shaft	1	T.50		RE.1
	F.168113	Spigot	2	S.1		
	STD 1508/2/118	Tube, distance	2	T.26		
	STD 1208/105/56/10	Shim, between bush and bracket (0.03 max.)	QR	—		

RESTRICTED


Hunter F. Mk. 58

2nd Edition

UNDERCARRIAGE—NOSE WHEEL DOOR OPERATING GEAR

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.	
		1	2	3	4	5					
		SUMMARY OF STOCK ITEMS									
	A 25/10 C	Bolt, 2 B.A.	...	...	...	...	...	...	—	—	—
	A 25/13 C	Bolt, 2 B.A.	...	...	...	...	...	...	—	—	—
	A 25/16 C	Bolt, 2 B.A.	...	...	...	...	...	...	—	—	—
	SP 21	Nipple, lubricating	...	...	...	...	...	...	—	—	—
	AGS 554	Nipple, lubricating	...	...	...	...	...	...	—	—	—
	A 27/CP	Nut, plain, 2 B.A.	...	...	...	...	...	...	—	—	—
	A 27/ES	Nut, 1/4" B.S.F.	...	...	...	...	...	...	—	—	—
	A 27/GT	Nut, lock, 3/8" B.S.F.	...	...	...	...	...	...	—	—	—
	A 27/G T.L.	Nut, lock, 3/8" B.S.F.	...	...	...	...	...	...	—	—	—
	SP 90/C4	Pin, split	...	...	...	...	...	...	—	—	—
	SP 90/C7	Pin, split	...	...	...	...	...	...	—	—	—
	SP 15/C	Washer, 2 B.A.	...	...	...	...	...	...	—	—	—
	SP 16/C	Washer, 2 B.A.	...	...	...	...	...	...	—	—	—
	SP 15/E	Washer, 1/4" dia.	...	...	...	...	...	...	—	—	—
	SP 42/C	Washer, tab	...	...	...	...	...	...	—	—	—

RESTRICTED

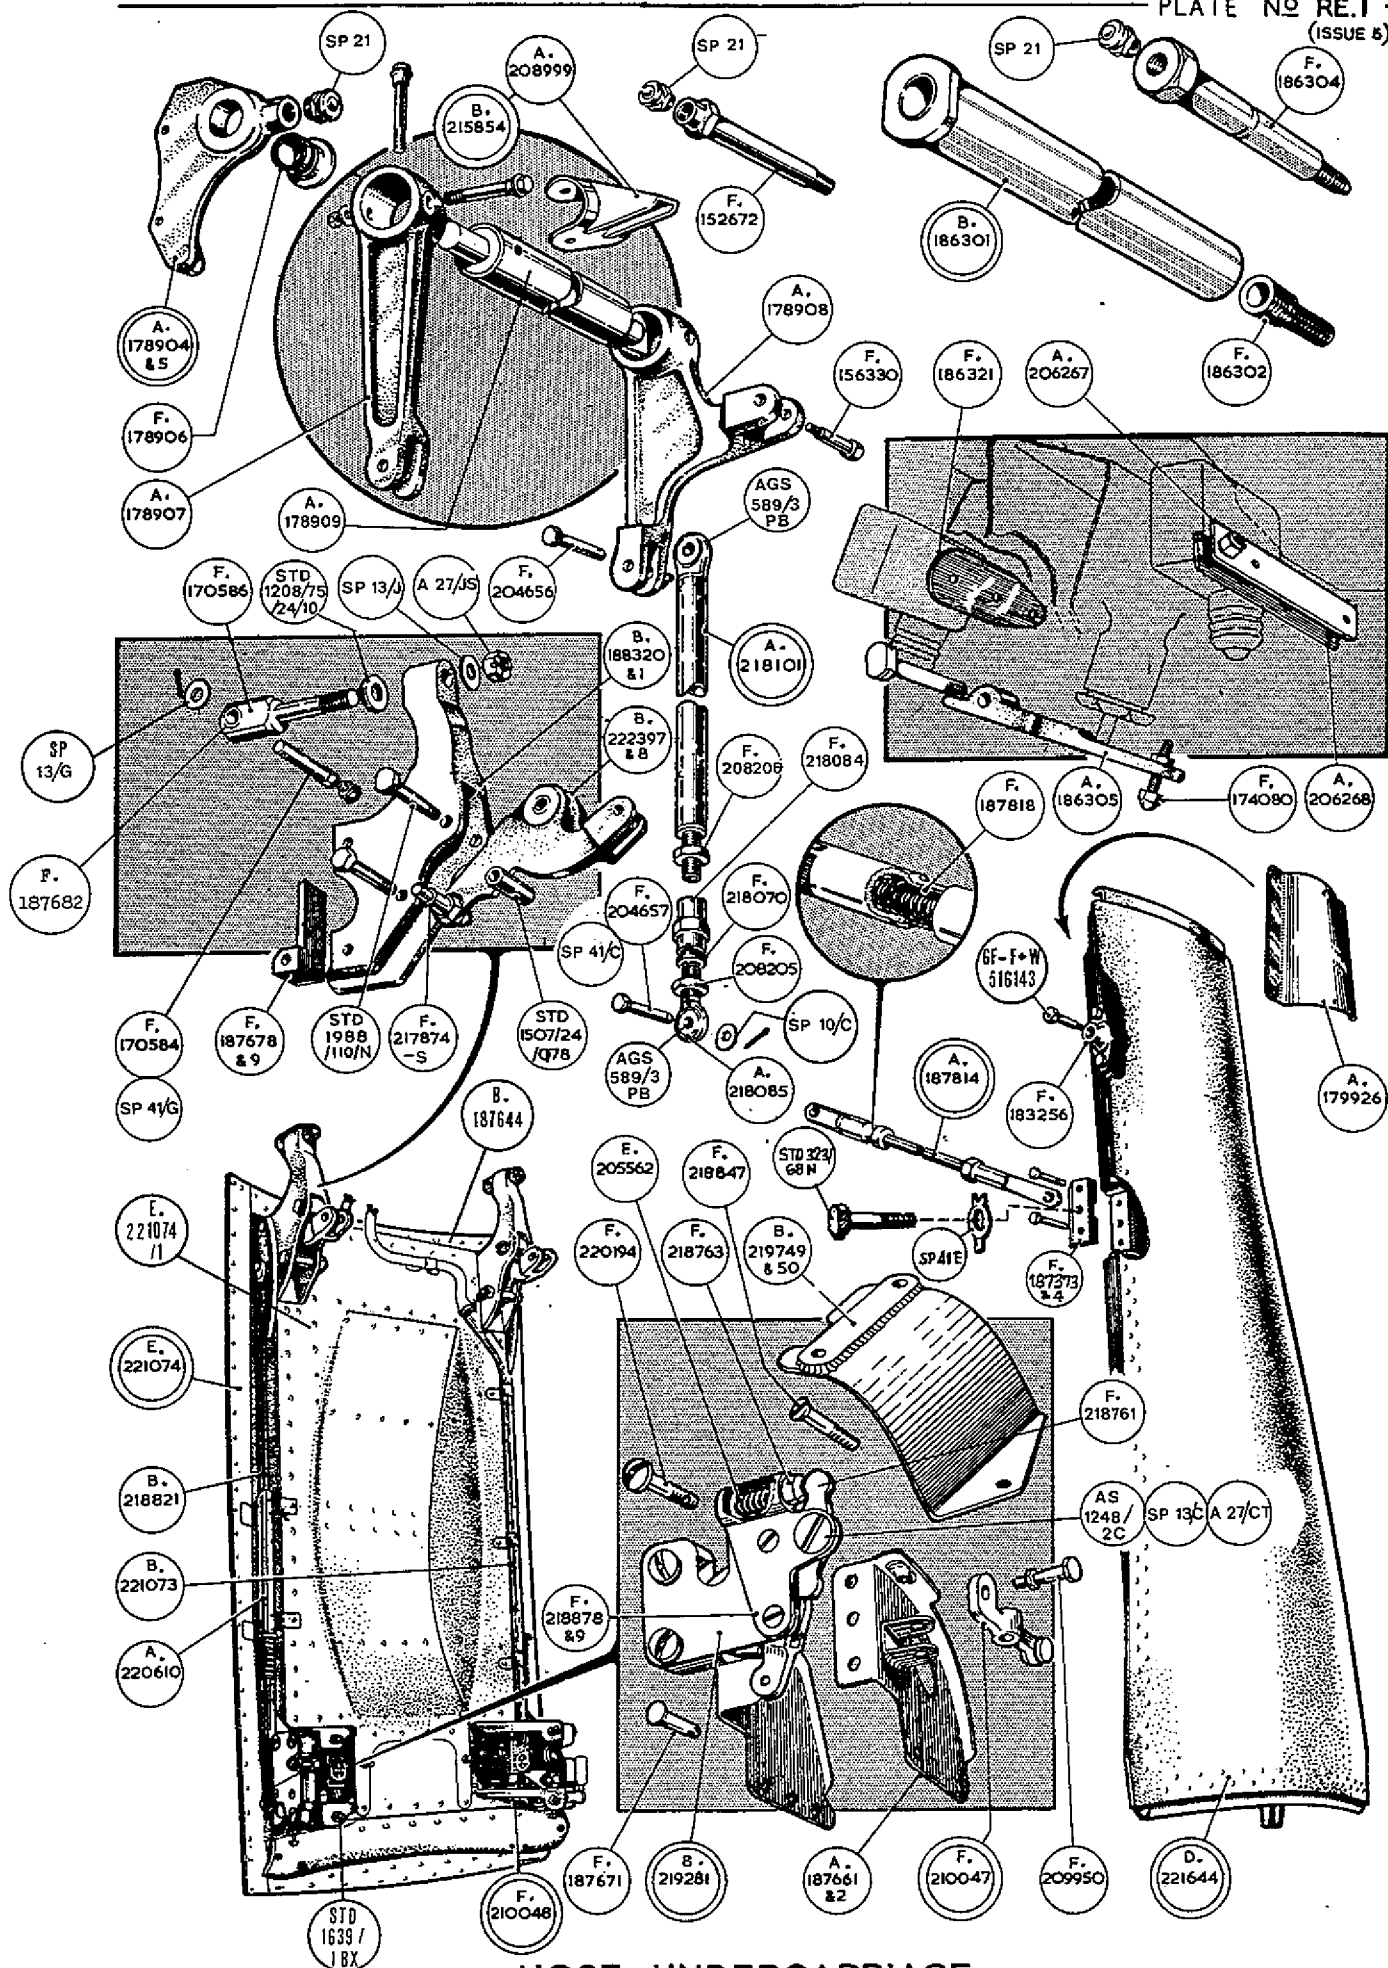

NOSE UNDERCARRIAGE



This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.