


POWER INSTALLATION—GEARBOX AND ACCESSORIES

Ref. No.	Part No.	Description						No. Off	Material Specification	M.R. Class of Store	Plate No.
			1	2	3	4	5				
	E.204660	ACCESSORY DRIVE FOR GEARBOX AND EQUIPMENT, ASSEMBLY						—			
37L/322	—	Arm, drive, type G.A.7/2... ..					1	—	A.		
6391	F.194529	Bolt, special, for generator attachment					4	S.99.B	C.	LB.1	
6392	F.194530	Bolt, special, for generator attachment					2	S.99.B	C.	LB.1	
6393	F.200766	Bolt, "U" for safety bracket at frame 34					1	S.1	C.	LB.2	
6394	B.203089	Box, sealing, for drive shaft					1	—	B.	LB.1	
6395	F.188685	Channel, stop, for safety bracket "U" bolt at frame 34					1	DTD.610	C.	LB.1	
	Std.2046/17/26	Clip, sleeved					1	S.510 or S.511			
37L/196	—	Gearbox, type TG.5/5, group					1	—	A.		
37L/2940	Rotol G.16095	Washer, for dipstick					1	—	C.		
5UA/6088	—	Generator, type 517					2	—	A.		
	C.212052	GENERATOR COOLING AIR OUTLET, ASSEMBLY (Mod. 425)					—	—			
8342	C.212054	Cover, bottom					1	S.3	B.	LB.1	
8343	B.212053	Cover, top					1	S.3	B.	LB.1	
8346	F.212146	Eye-bolt, securing covers					2	S.1	C.	LB.1	
8344	B.212055	Strap, inboard generator					1	S.3	B.	LB.1	
8345	B.212056	Strap, outboard generator					1	S.3	B.	LB.1	
8347	F.217098	Washer, profile at strap					4	L.72	C.	LB.1	
2192	Std.915/C14	Washer, for eyebolt pin					1	DTD.610	C.	4	
—	Std.1306/D/20	Hose, 1½" i/d x 2" long (Make from 32C/455) ...					2	DTD.625A	—		
	A.226908	Piece, packing, for drive arm					1	L.72		LB.1	
†7171	F.205196	Pipe, breather, for generator					1	DTD.253	MR/C	LB.1	
9944	F.230731	Pipe, vent (Mod. 751)					1	—	C.	LB.1	
†7173	F.206188	Pipe, drain, for drive arm					1	DTD.253	MR/C	LB.1	
†7174	F.213362	Pipe, drain, for oil filler					1	DTD.253	MR/C	LB.1	
6398	A.204659	Plate, sealing, for oil filler					2	LFS.21	C.	LB.1	
37J/8006	Dowty	Pump, "Bardel," type A8003Y/RH/3000					1	—	A.		
37L/325	—	Shaft, drive, type GD.9/100					1	—	A.		
37L/369	—	Shaft, drive, type GD.9/37					1	—	A.		
6396	B.205290	Spout, inlet cooling, for outboard generator ...					1	L.54 & L.59	C.	LB.1	
6397	B.205291	Spout, inlet cooling, for inboard generator ...					1	L.54 & L.59	C.	LB.1	
7175	Std.1509/23/028	Tube, distance, for oil filler sealing plate ...					6	T.4	MR/C		
7176	Std.1509/23/052	Tube, distance, for safety bracket "U" bolt ...					2	T.4	MR/C		
	Std.1509/23/060	Tube, distance, for clipping of pipe drain ...					1	T.4			

† For details see Piping Chart

POWER INSTALLATION—GEARBOX AND ACCESSORIES

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
SUMMARY OF STOCK ITEMS										
28D/9436920	A.25.1.C	Bolt, 2 B.A.	—	—	—
28D/9133012	A.25.3.C	Bolt, 2 B.A.	—	—	—
28D/1200119	A.25.4.C	Bolt, 2 B.A.	—	—	—
28D/7002428	A.26.6.C	Bolt, 2 B.A.	—	—	—
28D/1011238	A.25.3.E	Bolt, 1/4" B.S.F.	—	—	—
28D/12814	A.25.29.E	Bolt, 1/4" B.S.F.	—	—	—
28E/9871	AGS.606/T	Clip, nose	—	—	—
28F/9501	AGS.1142/B	Nipple	—	—	—
28M/13121	A27.CS	Nut, 2 B.A.	—	—	—
28M/1011467	A27.ES	Nut, 1/4" B.S.F.	—	—	—
28M/1011476	A27.JS	Nut, 3/8" B.S.F.	—	—	—
28M/10328	AGS.2002/C/1	Nut, 2 B.A.	—	—	—
28P/19154	SP.90.C7	Pin, split	—	—	—
28P/1021	SP.4Y.B19	Pin	—	—	—
28P/1019	SP.4Y.B17	Pin	—	—	—
28W/9419475	SP.15.C	Washer, 2 B.A.	—	—	—
28W/9419477	SP.15.J	Washer, 3/8" B.S.F.	—	—	—
28W/9419405	SP.15.E	Washer, 1/2" dia.	—	—	—
28W/9419487	SP.16.E	Washer, 1/2" dia.	—	—	—

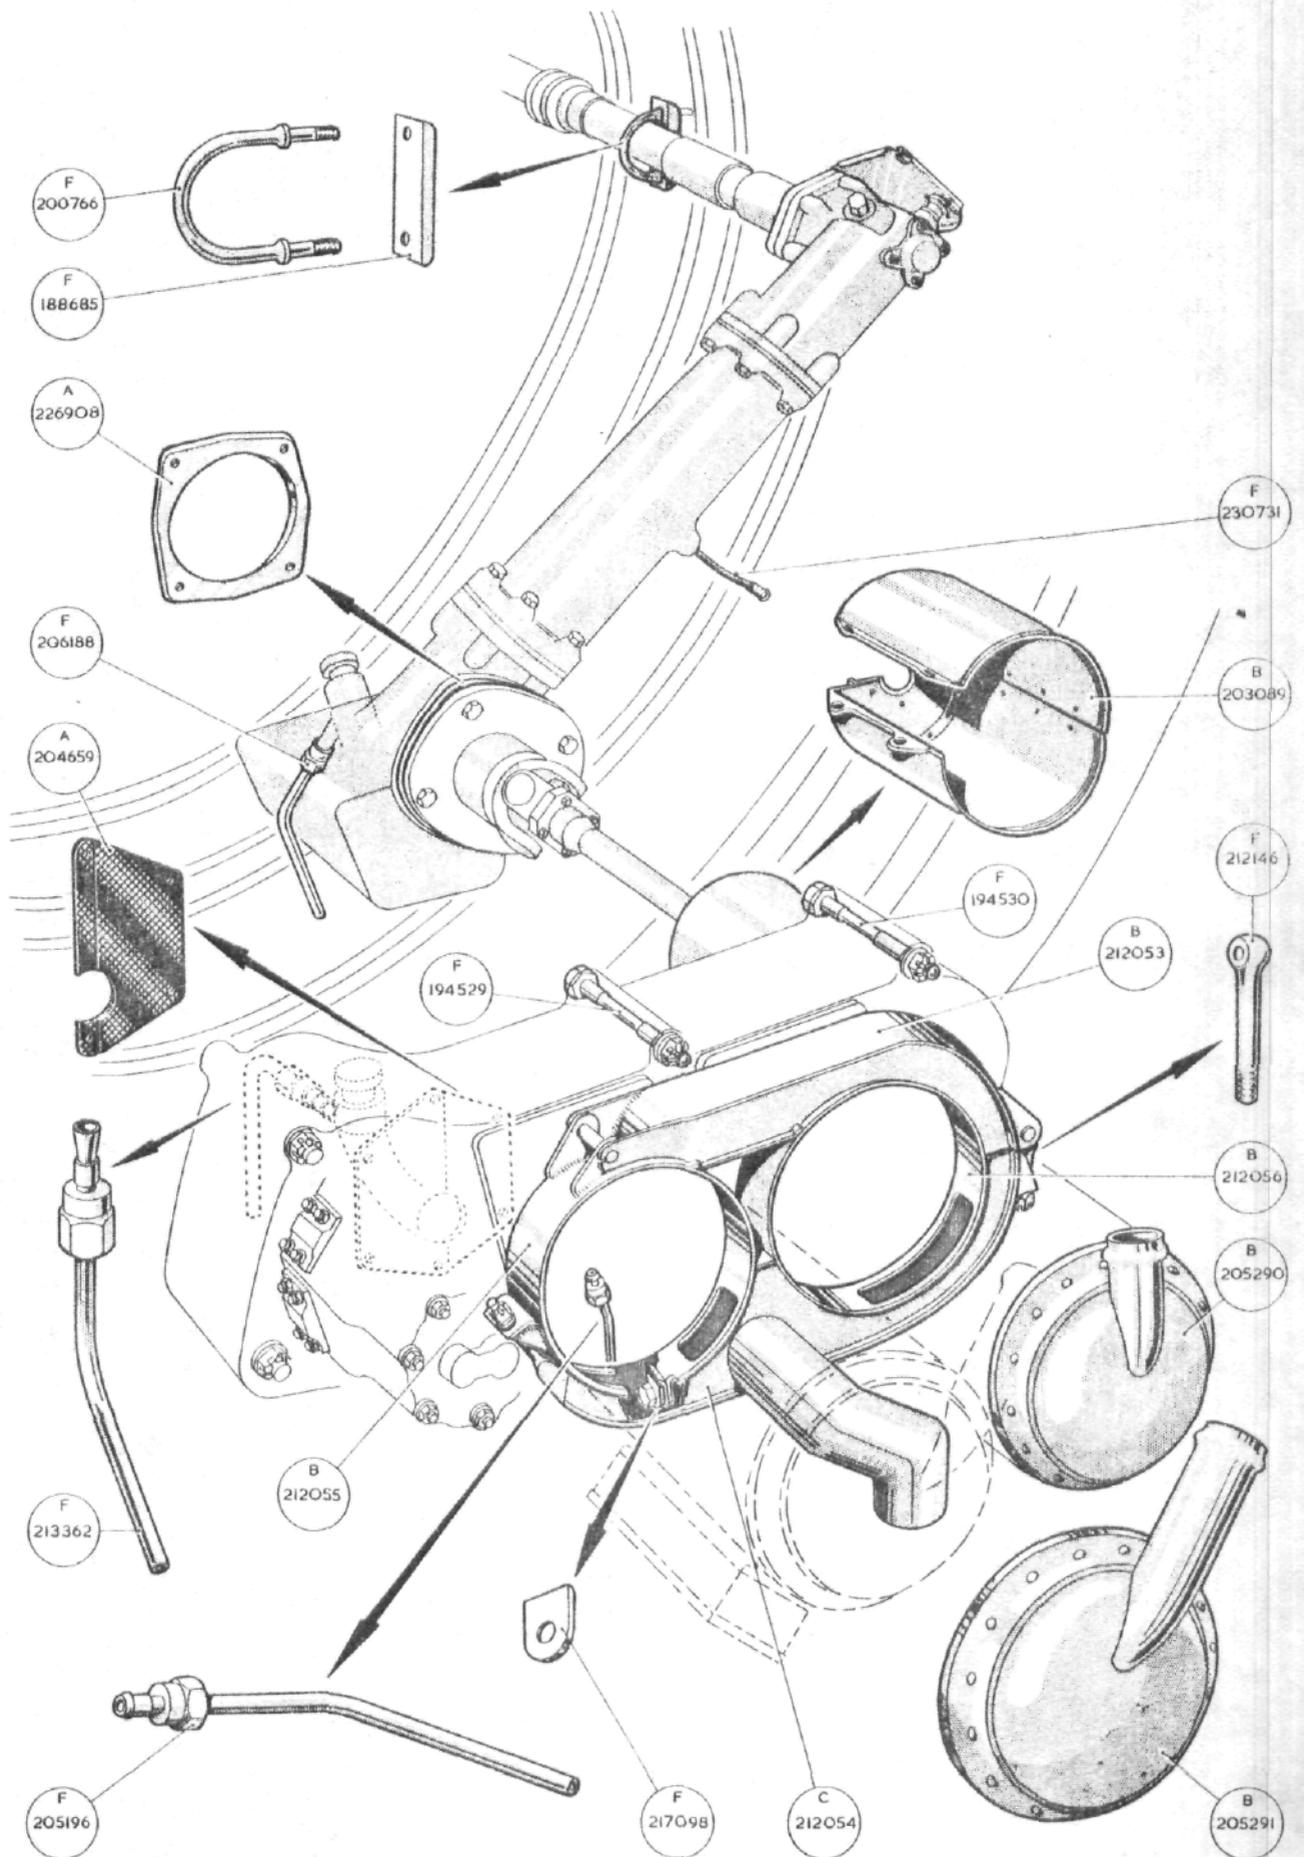

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

