

ENGINE CONTROLS—FRONT FUSELAGE

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Store	Plate No.
		1 2 3 4 5				
	C.202267	ENGINE CONTROLS IN FRONT FUSELAGE, ASSEMBLY	—	—	—	
913	C.188849	Box, control, L.P. cock, group Assembly	1	—	—	DB.1
—	F.188852	Bolt, special	3	S.1	C.	DB.1
27K/1066	A.232574	Plate, side	1	DTD.610	C.	DB.1
	Teleflex-C.36314	Unit, lever box	1	—	A.	
	Teleflex-C.36316/4	Gehäuse	1	—	—	DB.1
	D.232615	Box, control throttle, group	1	—	A.	DB.1
	C.205556	Box, throttle, control	1	—	—	
8637	B.192435	Cable, GS.15, group (See cable chart)	1	—	—	
—	B.205590	Cable, F.53, group (See cable chart)	1	—	—	
—	B.205488	Cable, F.37, group (See cable chart)	1	—	—	
	F.216043	Clamp, securing cables	2	—	—	DB.1
1893	F.174585	Eye-bolt, switch adjusting	1	S.1	C.	DB.1
6235	F.205563	Eye-end, for locking plunger	1	S.94.B	C.	DB.1
	STD 532/7	Ferrule	2	S.80	C.	4
	A.205559	Fitting, hinge, for locking lever	1	Casting	—	
	F.232614	Handle, throttle damping, group	1	—	B.	DB.1
	F.167986	Rod	1	S.95.B	—	
1895	F.167984	Spring	1	Spr. Stl.	C.	DB.1
	F.167988	Lever	1	DTD.364	C.	DB.1
1897	A.167991	Lever, damper, group	1	S.3	B.	DB.1
	F.202292	Lever, switch operating	1	S.3 & T.26	—	
6236	B.205557	Lever, throttle control, group	1	—	B.	DB.1
1706	F.152086	Bush	2	B.55 or B.69	—	
	STD 608/2	Bush	1	B.8 or DTD.78A	—	
	F.205564	Lever, locking	1	Casting	B.	DB.1
	A.232575	Plate, cover	1	BSS.265	—	
1900	F.195880	Plate, support micro switch	1	S.3	C.	DB.1
1901	F.195881	Plate, support, micro switch	1	S.3	C.	DB.1
6238	F.205561	Plunger, locking	1	S.94.B	B.	DB.1
	F.174662	Shaft	1	T.6	—	
	A.205560	Slide, for plunger	1	Casting	—	
6239	F.205562	Spring	1	DTD.215	C.	DB.1
6240	D.205167	Stop, adjustable	1	Casting	B.	DB.1
5F/2281	Hellermann-HV.3341	Strapping	9"	—	C.	
5F/2282	Hellermann-HV.3342	Stud	2	—	C.	
5CW/4638		Switch, micro, type 1A Mk. 4	1	—	B.	
	STD 1509/2/026	Tube, distance (Make from 30B/555)	1	T.4	MR/C	4
	STD 1509/23/025	Tube, distance (Make from 30B/556)	1	T.4	MR/C	4
	STD 1509/23/045	Tube, distance (Make from 30B/556)	1	S.1 or S.3	MR/C	4
	Ferranti-8B/4504-S1	Unit, control, type T.1 Mk. 2A with French (AS.920/64)	1	—	A.	
	STD 914/J/24	Washer, rubbing	2	S.1 or S.3	—	4
6241	F.205168	Washer, serrated	1	Casting	C.	DB.1
	F.243996	Washer, slotted (May be made from SP.16A)	1	L.72 or L.65	—	
6242	A.202343	Bracket, swivel support	1	S.3 or T.26	C.	DB.1
27K/1062	Teleflex-C.36706/B	Break-unit	2	—	C.	DB.1

ENGINE CONTROLS—FRONT FUSELAGE

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
27K/1063	Teleflex - C.36424	Cable and break rod, assembly Leistungshebel u. Niederdruckhahn vorne bis Trennstelle					2	—	C.	DB.1
919	F.189942	Clamp, at frames 13, 15 & 16					5	LFS.21	C.	DB.1
5801	F.206523	Clamp, at frames 13					2	LFS.21	C.	DB.1
1702	F.193858	Clamp, at frame 12					1	LFS.21	C.	DB.1
1703	F.193859	Clamp, at frame 12					1	LFS.21	C.	DB.1
	STD 840/14	Clip, for earthing connector					2	DTD.610	MR/C	4
	STD 2046/17/26	Clip, sleeved (Bride mit Gummi)					2	—		
27K/1041	Teleflex - A.35336	Collar					11	—	C.	
27K/548	Teleflex - DS.307/2	Conduit, (for lengths see Hawker drawings B.189945, 48, 49, 51 A.205979-80, C.202267)					QR	—	C.	
27K/1070	Teleflex - B.35375/B	Connector, bulkhead					2	—	C.	
27K/796	Teleflex - B.35340/B	Connector, conduit					2	—	C.	
920	F.175409	Fork-end					1	S.1	C.	DB.1
	STD 1231/1	Lug, locking, for swivel at frame 10					1	S.3	C.	4
	STD 1221/Z/D/50	Pin					1	H.T.S.	C.	4 DB.1
	F.211034	Plate, blanking on frame 14					1	—		
27K/1042	Teleflex - A.35335	Sleeve, outer					11	—	C.	
27K/545	Teleflex - A.24242	Sleeve, nut					1	—	C.	
	Teleflex - C.36247	Sliding, screwed end					1	—	C.	DB.1
	Teleflex - C.28166/C	Swivel, spring loaded					1	—	C.	
5802	F.206557	Support, for conduit					2	LFS.21	C.	DB.1


ENGINE CONTROLS—FRONT FUSELAGE

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
		SUMMARY OF STOCK ITEMS								
	A.25.6C	Bolt, 2 B.A.	...	...	...	...	-	-	-	
	A.25.1B	Bolt, 4 B.A.	...	...	...	...	-	-	-	
	A.25.9C	Bolt, 2 B.A.	...	...	...	...	-	-	-	
	A.25.2B	Bolt, 4 B.A.	...	...	...	...	-	-	-	
	A.25.4B	Bolt, 4 B.A.	...	...	...	...	-	-	-	
	A.25.7B	Bolt, 4 B.A.	...	...	...	...	-	-	-	
	A.25.11B	Bolt, 4 B.A.	...	...	...	...	-	-	-	
	A.25.1C	Bolt, 2 B.A.	...	...	...	...	-	-	-	DB.1
	A.25.3C	Bolt, 2 B.A.	...	...	...	...	-	-	-	
	A.25.5C	Bolt, 2 B.A.	...	...	...	...	-	-	-	
	A.25.21E	Bolt, 1/2" B.S.F.	...	...	...	...	-	-	-	
	AS.1242.1.C	Bolt, 2 B.A.	...	...	...	...	-	-	-	DB.1
	AS.1248.2C	Bolt, 2 B.A.	...	...	...	...	-	-	-	
	A.27.A.P.	Nut, 6 B.A.	...	...	...	...	-	-	-	
	A.27.B.P.	Nut, 4 B.A.	...	...	...	...	-	-	-	
	A.27.C.P.	Nut, 2 B.A.	...	...	...	...	-	-	-	
	A.27.E.S.	Nut, 1/2" B.S.F.	...	...	...	...	-	-	-	
	AGS.2001.B1	Nut, 4 B.A.	...	...	...	...	-	-	-	
	AGS.2001.C	Nut, 2 B.A.	...	...	...	...	-	-	-	
	AGS.2002.B1	Nut, 4 B.A.	...	...	...	...	-	-	-	
	AGS.2002.C1	Nut, 2 B.A.	...	...	...	...	-	-	-	
	SP4.Y.A5	Pin	...	...	...	...	-	-	-	
	SP4.Y.B7	Pin	...	...	...	...	-	-	-	
	SP4.Y.B5	Pin	...	...	...	...	-	-	-	
	SP4.Y.A18	Pin	...	...	...	...	-	-	-	
	SP4.YB.17	Pin	...	...	...	...	-	-	-	
	SP9.C4	Pin, split	...	...	...	...	-	-	-	
	SP.90/C4	Pin, split	...	...	...	...	-	-	-	DB.1
	SP.90/C7	Pin, split	...	...	...	...	-	-	-	
	AS.156/408	Rivet	...	...	...	...	-	-	-	
	A.31.B.20	Screw	...	...	...	...	-	-	-	
	A.33.C.14	Screw	...	...	...	...	-	-	-	DB.1
	A.33.B.12	Screw	...	...	...	...	-	-	-	
	SP.15.B	Washer, 4 B.A....	...	...	...	...	-	-	-	
	SP.15.C	Washer, 2 B.A....	...	...	...	...	-	-	-	DB.1
	SP.13.E	Washer	...	...	...	...	-	-	-	
	SP.16.B	Washer, 4 B.A....	...	...	...	...	-	-	-	

ENGINE CONTROLS—FRONT FUSELAGE

[illegible]

RESTRICTED

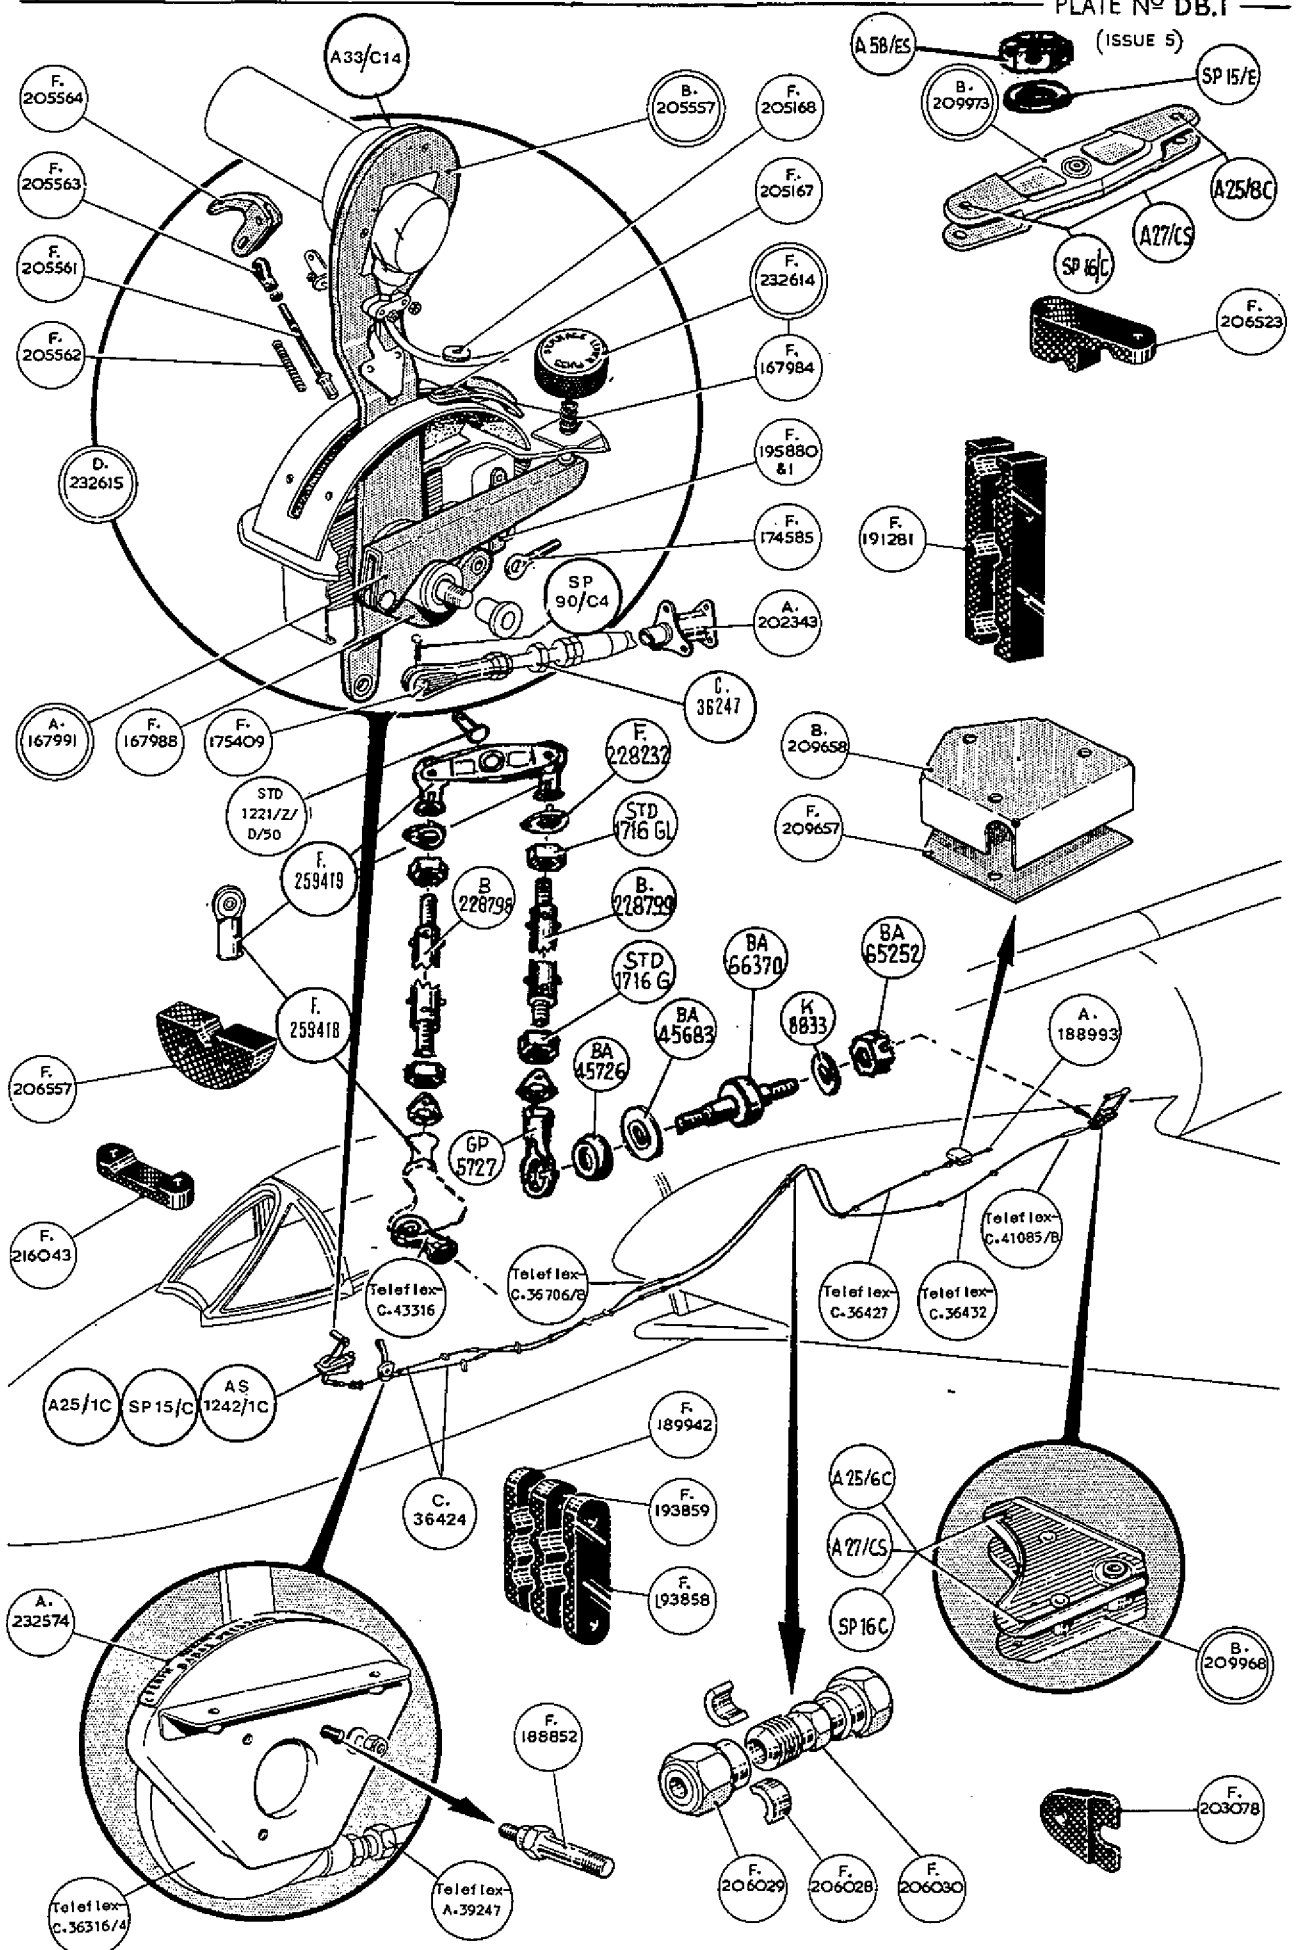

ENGINE CONTROLS

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

