

FUSELAGE-HOOD WINDING GEAR

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Score	Plate No.
		1 2 3 4 5				
5W/309 560	D.187117	HOOD WINDING GEAR, ASSEMBLY	—	—	—	JF.1
	D.186215	ACTUATOR AND CROSS SHAFT, ASSEMBLY	—	—	—	
	B.186227	Actuator, group	1	—	—	
	Rotax-C.5209/1	Actuator, rotary { Befestig.-Elemente siehe	1	—	A.	
	B.186228	Housing, group { BAMF-Katalog 6F/K-3)	1	—	B.	
	Torrington-B.1012	Bearing, needle roller...	1	—	B.	
	561 F.186230	Bush	2	BSS.369	C.	
	562 A.186231	Sprocket	1	S.95.B	C.	
	563 F.186232	Washer, sprocket retaining	1	S.3	C.	
	5256 F.202895	Bolt, for cross shaft pinion housing	4	S.95.B	C.	
	AS 924/48P	Chain	1	—	B.	
	567 F.169576	Eye-end, tension rod	2	S.1	C.	
	568 F.186217	Eye-end, tension rod	2	S.1	C.	
	569 A.186224	Housing, cross shaft pinion, group	2	—	C.	
	570 F.186225	Bearing	1	BSS.369	C.	
	571 F.186226	Bearing	1	BSS.369	C.	
270A/369 270A/371	573 F.186219	Pinion, cross shaft	2	S.95.B	C.	JF.1
	1503 F.189478	Rod, tension, for actuator	2	S.96.B	C.	JF.1
	575 F.186218	Shim, cross shaft housing	QR	—	C.	JF.1
	5252 B.202856	Shaft, cross, group	1	Laminated Brass Stamping	B.	JF.1
	564 F.188564	Block, bearing	1	—	C.	JF.1
	STD 1292/9/C	Bolt, attaching plug end	2	S.2	MR/C	4
	STD 1292/8/C	Bolt, attaching plug end	2	S.2	C.	4
	STD 1292/10/C	Bolt, attaching sprocket	2	S.2	C.	4
	Dowty-GD.1309/6	Seal, "O"	2	—	C.	JF.1
	Dowty-GD.1309/9	Seal, "O"	2	—	C.	JF.1
	577 F.186865	Sprocket	1	S.95.B	C.	JF.1
	Std 1509/23/040	Tube, distance $\frac{5}{16}$ " o/d x 17 S.W.G. x 0-40" long	1	T.4	MR/C	4
	Std 915/C/14	Washer, 2 B.A....	2	DTD.610	C.	4
	Std 1283/G	Washer, shim	3	Laminum	C.	4
	Std 1547/50/12	Washer, profile...	2	DTD.610	C.	4
554	A.234609	Box, control, group (AS.840/1)	1	—	B.	JF.1
	6204 A.211786	Box, actuator control, group (Mod. 376)	1	—	B.	JF.1
	A.211785	Gate, group (Mod. 376)	1	—	—	—
	6206 F.211257	Piece, distance	2	L.65.C	C.	JF.1
	6205 F.211244	Spring, leaf	1	DTD.166	C.	JF.1
	555 F.188527	Knob, lever	1	BSS.771	C.	JF.1
	A.188524	Lever	1	S.3	C.	JF.1
	559 A.188987	Cable, control box to bell crank lever, group	1	—	B.	JF.1
	Std 1920	Consisting of:—	—	—	—	—
	Bowden-W.11	Adjuster, complete with sleeve and nut	1	—	—	5
	Bowden-T.3	Cable, 5 cwt.	QR	W.11	C.	—
	SP 37/A	Conduit	QR	—	C.	—
	SP 38/A	Eye-end	1	—	C.	—
		Fork-end	1	—	C.	—

FUSELAGE-HOOD WINDING GEAR

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Score	Plate No.
		1	2	3	4	5				
	SP 40/B 14					Grommet	2	—	C.	
	F.178859					Plug	1	DTD.364		
	Bowden.PN.999					Stop	1	—	C.	
	A.234610					Switch , hood actuator, group (AS.840/1) ...	1	—	A.	JF.1
	B.205376					Cable , F.40 (See Cable Chart)	1	—	MR/B	JF.1
	A.232672					Cover (Mod. 685)	1	L.72		
9706	F.225223					Guard , switch (Mod. 685)	1	—		
586	F.188532					Lever	1	S.80	C.	JF.1
587	F.188531					Lever	1	S.80	C.	JF.1
588	F.188533					Link	1	S.3	C.	JF.1
589	Millis-GP.5					Pin , grooved, GP.5 $\frac{1}{16}$ " dia. $\times$ $\frac{3}{8}$ " long ...	2	M S.1	C.	JF.1
	Hellermann-P.3					Sleeve , P.V.C., .6" long	1	1738	C.	
590	F.188534					Spring	1	Type B		
SCW/7548	XD.784					Switch	1	Sp. St.	C.	JF.1
	B.232755/1					Transfer , "OUVERT"	1	—	B.	
	B.232755/2					Transfer , "FERME"	1	—	C.	
	Std.1509/12/052					Tube , distance, $\frac{1}{2}$ " o/d $\times$ 20 S.W.G. $\times$ 0.52" long (Make from 30B/554)	4	T.4	MR/C	4
556	A.188986					Cable , bell crank lever to actuator, group ...	1	—	B.	JF.1
						Consisting of :—				
	Std 1920					Adjuster , complete with sleeve and nut ...	2	—		5
	Bowden-W.11					Cable , 5 cwt.	QR	W.11	C.	
	Bowden.T.3					Conduit	QR	—	C.	
	SP 38/A					Fork-end	1	—	C.	
557	F.171912					Nipple	1	BSS.250	C.	
	A27/ET					Nut , $\frac{3}{4}$ " B.S.F.	1	—	C.	
	F.172899					Pin , taper	1	M.S.		
	F.189131					Plate , stop	1	DTD.610		
1563	F.191834					Spring	1	Sp. St.	C.	JF.1
	F.190950					Stop	1	DTD.364		
	F.214243					Cover , pulley at frame 14	1	—		
	F.214244					Cover , pulley at frame 14	1	—		
579	F.188317					Lever , front limit switch	1	S.80	C.	JF.1
580	F.188316					Plunger , front limit switch	1	S.1	C.	JF.1
6207	F.210854					Plunger , rear limit switch, group (Mod. 377) ...	1	—	C.	JF.1
	F.187272					Plunger	1	S.80.B		JF.1
	F.187273					Spring	1	Sp. St.		JF.1
582	F.182857					Ring , "D," cable locking at actuator	1	Sp. St.	C.	JF.1
583	F.188318					Screw , front limit switch	1	S.95.B	C.	JF.1
584	F.188319					Spring , torsion, front limit switch	1	Sp. St.	C.	JF.1
	Std 1507/4/036					Tube , distance, $\frac{3}{8}$ " o/d $\times$ 22 S.W.G. $\times$ 0.36" long ... (Make from 30A/974)	1	T.25	MR/C	4
*	SP.900/3					O-Ring	1	—		JF.1


FUSELAGE-HOOD WINDING GEAR

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Score	Plate No.
		1	2	3	4	5				
		SUMMARY OF STOCK ITEMS								
	A25.1B	Bolt, 4 B.A.	...	...	...	...	-	—	—	
	AS.1246/2B	Bolt, 4 B.A.	...	...	...	...	-	—	—	
	AS.1246/3B	Bolt, 4 B.A.	...	...	...	...	-	—	—	
	AS.1246/4B	Bolt, 4 B.A.	...	...	...	...	-	—	—	
	AS.1248/4B	Bolt, 4 B.A.	...	...	...	...	-	—	—	
	AS.1248/7B	Bolt, 4 B.A.	...	...	...	...	-	—	—	
	AS.1242/7C	Bolt, 2 B.A.	...	...	...	...	-	—	—	
	A25.3C	Bolt, 2 B.A.	...	...	...	...	-	—	—	
	A25.5C	Bolt, 2 B.A.	...	...	...	...	-	—	—	
	A25.6C	Bolt, 2 B.A.	...	...	...	...	-	—	—	
	A25.7C	Bolt, 2 B.A.	...	...	...	...	-	—	—	
	AS.1242/1B	Bolt, 4 B.A.	...	...	...	...	-	—	—	
	AS.1242/13C	Bolt, 2 B.A.	...	...	...	...	-	—	—	
	A25.4E	Bolt, 1/2" B.S.F.	...	...	...	...	-	—	—	
	A25.7E	Bolt, 1/2" B.S.F.	...	...	...	...	-	—	—	
	AGS.2031/6	Circlip	...	...	...	...	-	—	—	
	A27.AP	Nut, 6 B.A.	...	...	...	...	-	—	—	
	A27.CP	Nut, 2 B.A.	...	...	...	...	-	—	—	
	A27.CT	Nut, 2 B.A.	...	...	...	...	-	—	—	
	A17.ET	Nut, 1/2" B.S.F.	...	...	...	...	-	—	—	
	A27.ETL	Nut, 1/2" B.S.F.	...	...	...	...	-	—	—	
	A58.ES	Nut, 1/2" B.S.F.	...	...	...	...	-	—	—	
	AGS.2001/B1	Nut, 4 B.A.	...	...	...	...	-	—	—	
	AGS.2001/C1	Nut, 2 B.A.	...	...	...	...	-	—	—	
	AGS.2001/E1	Nut, 1/2" B.S.F.	...	...	...	...	-	—	—	
	AGS.2002/B1	Nut, 4 B.A.	...	...	...	...	-	—	—	
	AGS.2002/E1	Nut, 1/2" B.S.F.	...	...	...	...	-	—	—	
	SP9.C4	Pin, split	...	...	...	...	-	—	—	
	SP.90/C5	Pin, split	...	...	...	...	-	—	—	
	SP4.Y.A2	Pin	...	...	...	...	-	—	—	
	AS.111	Pulley	...	...	...	...	-	—	—	
	A33.A24	Screw, 6 B.A.	...	...	...	...	-	—	—	
	A31.B.12	Screw, 4 B.A.	...	...	...	...	-	—	—	
	A32.B.12	Screw, 4 B.A.	...	...	...	...	-	—	—	
	SP.10.B	Washer	...	...	...	...	-	—	—	
	SP.10.C	Washer, 2 B.A.	...	...	...	...	-	—	—	
	SP.15.B	Washer, 4 B.A.	...	...	...	...	-	—	—	
	SP.15.C	Washer, 2 B.A.	...	...	...	...	-	—	—	
	SP.15.E	Washer, 1" dia.	...	...	...	...	-	—	—	
	SP.15.G	Washer, 5/16" dia.	...	...	...	...	-	—	—	
	SP.16.C	Washer, 2 B.A.	...	...	...	...	-	—	—	
	SP.16.E	Washer, 1" dia.	...	...	...	...	-	—	—	
Ae.A. 6086	A34/A10	LSk.-Schraube					3	—	—	
	AGS 2002/A1	Sich-Mutter					3	—	—	

FUSELAGE-HOOD WINDING GEAR

[illegible]

RESTRICTED

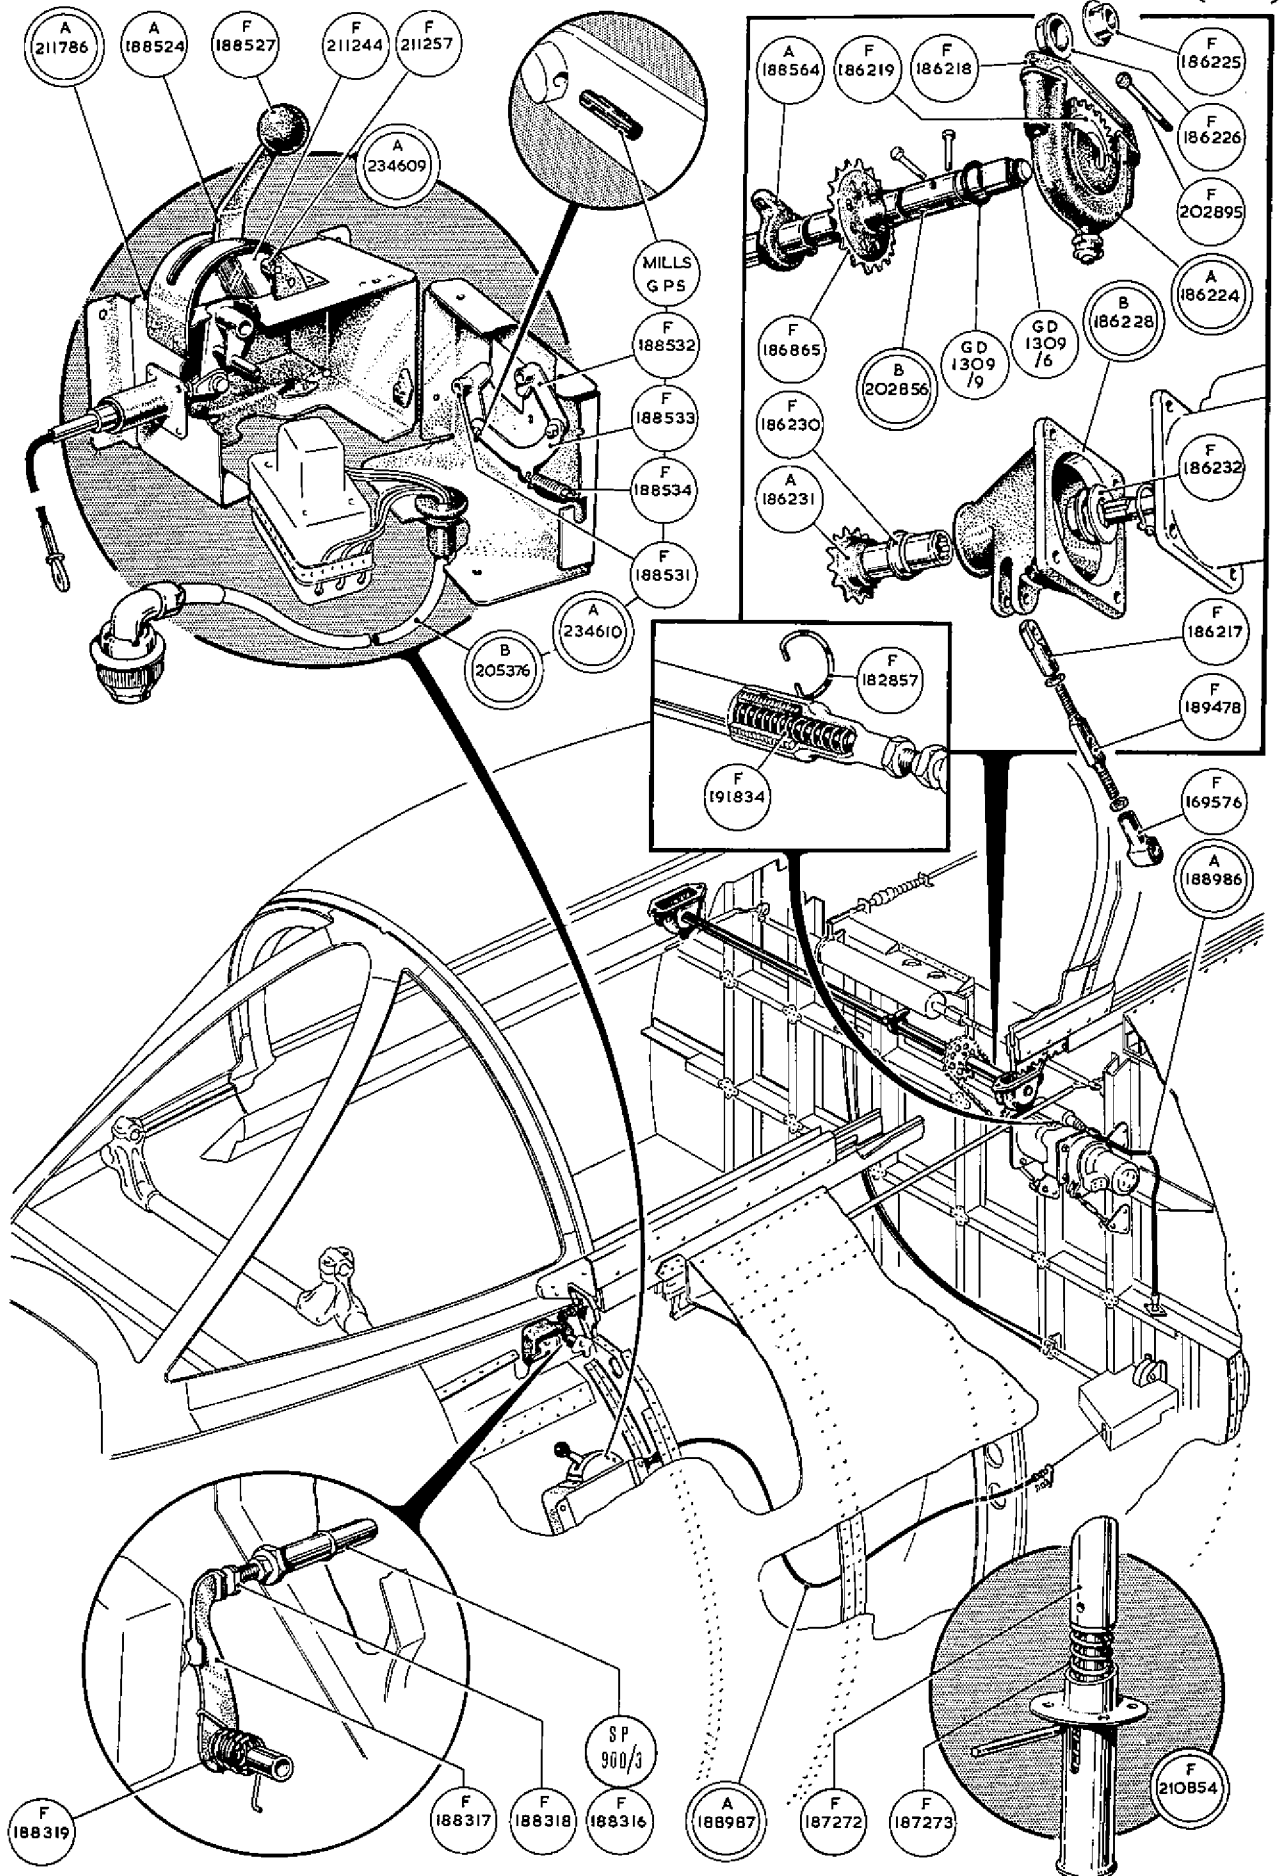

HOOD WINDING GEAR



This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

