

SERVICES—PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description	No. Off					Material Specification	M.R. Class of Score	Plate No.
			1	2	3	4	5			
		<b>PILOT'S ANTI "G" INSTALLATION, ASSEMBLY</b>								
861	D.190124	Angle, mounting, anti "G" valve ... ..	1				DTD.610	C.	NK.1	
862	F.188884	Angle, mounting, anti "G" valve ... ..	1				DTD.610	C.	NK.1	
863	F.190229	Bolt, special, connecting air bottle straps ... ..	2				S.95.B	C.	NK.1	
447	F.186436	Bolt, special, strap clamping ... ..	2				S.95.B	C.	NK.1	
27VA/3988	Dunlop -	Bottle, air, spherical ... ..	2				—	A.		
	ACM.16782/6A									
864	F.190220	Clip, mounting, reducing valve ... ..	1				S.3	C.	NK.1	
	Std 1178/3	Clip, mounting, reducing valve ... ..	1				S.3 & T.26	C.	4	
	Std 2045/17/26	Clip, sleeved ... ..	1				—			
	Std 2045/29/22	Clip, sleeved ... ..	2				—			
	Std 2046/29/22	Clip, sleeved ... ..	1				—			
	Std.850/28	Clip, securing pipes, $\frac{3}{8}$ " wide $\times$ 22 S.W.G. $\times$ 2-8" long (Make from 30B/1433) (make from 32C/450)	2				DTD.610	MR/C	4	
	Std 1306/N/20	Coupling, flexible, $\frac{3}{8}$ " i/d $\times$ 2-0" long...	4				DTD.625A	MR/C	4	
Ae.A.1455	N-541.004-2	Verbindungsschlauch	1				DTD.625A	MR/C	4	
1707	A.193653	Elbow, at cockpit shelf side wall ... ..	1				L.54 or T.9	C.		
27VA/3443	Dunlop -	Filter ... ..	1				—	A.		
	ACO.7273									
6A/2691/GL	N-504.016	Gauge, pressure, Mk. 14.KK ... ..	1				—	A.		
285†	D.190124/1	Hose, kink proof, $\frac{3}{8}$ " i/d $\times$ 12 $\frac{1}{2}$ " long (Dunlop DAS/412E)	1				—			
6A/2771/GL	—	Label, air ... ..	1				—	C.		
3584†	A.190201/1	Pipe, 4-way, piece to non-return valve ... ..	1				DTD.323	MR/C		
3585†	A.190201/2	Pipe, non-return valve to air bottle ... ..	1				DTD.323	MR/C		
3586†	A.190201/3	Pipe, air, bottle to air bottle ... ..	1				DTD.323	MR/C		
3587†	A.190201/4	Pipe, air, bottle to filter ... ..	1				DTD.323	MR/C		
1948†	A.190201/5	Pipe, filter to tee-piece ... ..	1				DTD.323	C.		
3588†	A.190201/6	Pipe, tee-piece to selector valve ... ..	1				DTD.323	MR/C		
3589†	A.190201/7	Pipe, selector to reducing valve ... ..	1				DTD.323	MR/C		
3590†	A.190201/8	Pipe, tee-piece to gauge ... ..	1				DTD.323	MR/C		
3591†	A.193654/1	Pipe, anti "G" valve to connection ... ..	1				L.54 & T.9	MR/C		
3592†	A.193654/2	Pipe, connection ... ..	1				L.54 & T.9	MR/C		
3593†	A.193654/3	Pipe, connection to elbow ... ..	1				L.54 & T.9	MR/C		
	Std 1606/44/B16	Screw, securing elbow, 4 B.A. $\times$ $\frac{1}{2}$ " long ... ..	3				Brass	MR/C	5	
	Std 1606/44/B24	Screw, securing pressure gauge ... ..	4				—	C.	5	
866	F.189989	Strap ... ..	2				DTD.166	C.	NK.1	
27VA/3445	Dunlop -	Socket, quick release ... ..	1				—	A.		
	ACO.6580									
867	F.189991	Strap, air bottle ... ..	4				DTD.166	C.	NK.1	
868	F.190003	Strap, air bottle ... ..	2				DTD.166	C.	NK.1	
	Std 1507/23/035	Tube, distance, $\frac{3}{16}$ " o/d $\times$ 17 S.W.G. $\times$ 0-35" long ... (Make from 30A/966)	2				T.26	MR/C	4	
	Std 1509/23/040	Tube, distance, $\frac{3}{8}$ " o/d $\times$ 17 S.W.G. $\times$ 0-4" long ... (Make from 30B/557)	1				T.4	MR/C	4	
	Std 1509/23/085	Tube, distance, for clip securing pipe, $\frac{3}{8}$ " o/d $\times$ 17 S.W.G. $\times$ 0-85" long (Make from 30B/557)	1				T.4	MR/C	4	

† For details see Piping Chart

**SERVICES—PILOT'S ANTI "G" INSTALLATION**


Ref. No.	Part No.	Description						No. Off	Material Specification	M.R. Class of Score	Plate No.
			1	2	3	4	5				
869	F.140778	Union, reducing	...	...	...	...	...	1	L.1	C.	NF.1
27VB/3254	Hymatic-AG.2	Valve, anti "G"	...	...	...	...	...	1	—	A.	
27Q/1539	Dowty - D.5213Y	Valve, non-return (Mod. 447)	...	...	...	...	...	1	—	A.	
27VC/27	Palmer-C.58	Valve, reducing	...	...	...	...	...	1	—	A.	
27VB/3441	Hymatic-SV.9	Valve, selector	...	...	...	...	...	1	—	A.	
	Std 915/B/18	Washer	...	...	...	...	...	6	DTD.610	C.	4

SERVICES—PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
<b>SUMMARY OF STOCK ITEMS</b>										
	A25.1B	Bolt, 4 B.A.	...	...	...	...	...	—	—	—
	A25.7B	Bolt, 4 B.A.	...	...	...	...	...	—	—	—
	A25.9C	Bolt, 2 B.A.	...	...	...	...	...	—	—	—
	AGS.605-0	Clip	...	...	...	...	...	—	—	—
	AGS.605-1	Clip	...	...	...	...	...	—	—	—
	AGS.1661B	Clip	...	...	...	...	...	—	—	—
	AS.3360.B4B	Lead, bonding	...	...	...	...	...	—	—	—
	AS.3360.B5B	Lead, bonding	...	...	...	...	...	—	—	—
	AGS.1142/B	Nipple	...	...	...	...	...	—	—	—
	A27.CP	Nut, 2 B.A.	...	...	...	...	...	—	—	—
	AGS.2001.B1	Nut, 4 B.A.	...	...	...	...	...	—	—	—
	AGS.2001.C1	Nut, 2 B.A.	...	...	...	...	...	—	—	—
	AGS.113/C	Nut, wing	...	...	...	...	...	—	—	—
	AGS.1120/1	Piece, tee	...	...	...	...	...	—	—	—
	SP.4.Y.A15	Pin	...	...	...	...	...	—	—	—
	SP.9.C4	Pin, split	...	...	...	...	...	—	—	—
	A32.B14	Screw	...	...	...	...	...	—	—	—
	A32.C14	Screw	...	...	...	...	...	—	—	—
	SP.15B	Washer	...	...	...	...	...	—	—	—
	SP.15C	Washer	...	...	...	...	...	—	—	—
	AGS.162.B	Washer	...	...	...	...	...	—	—	—
	SP.16.C	Washer, 2 B.A.	...	...	...	...	...	—	—	—

SERVICES—PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.						Description	No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5					

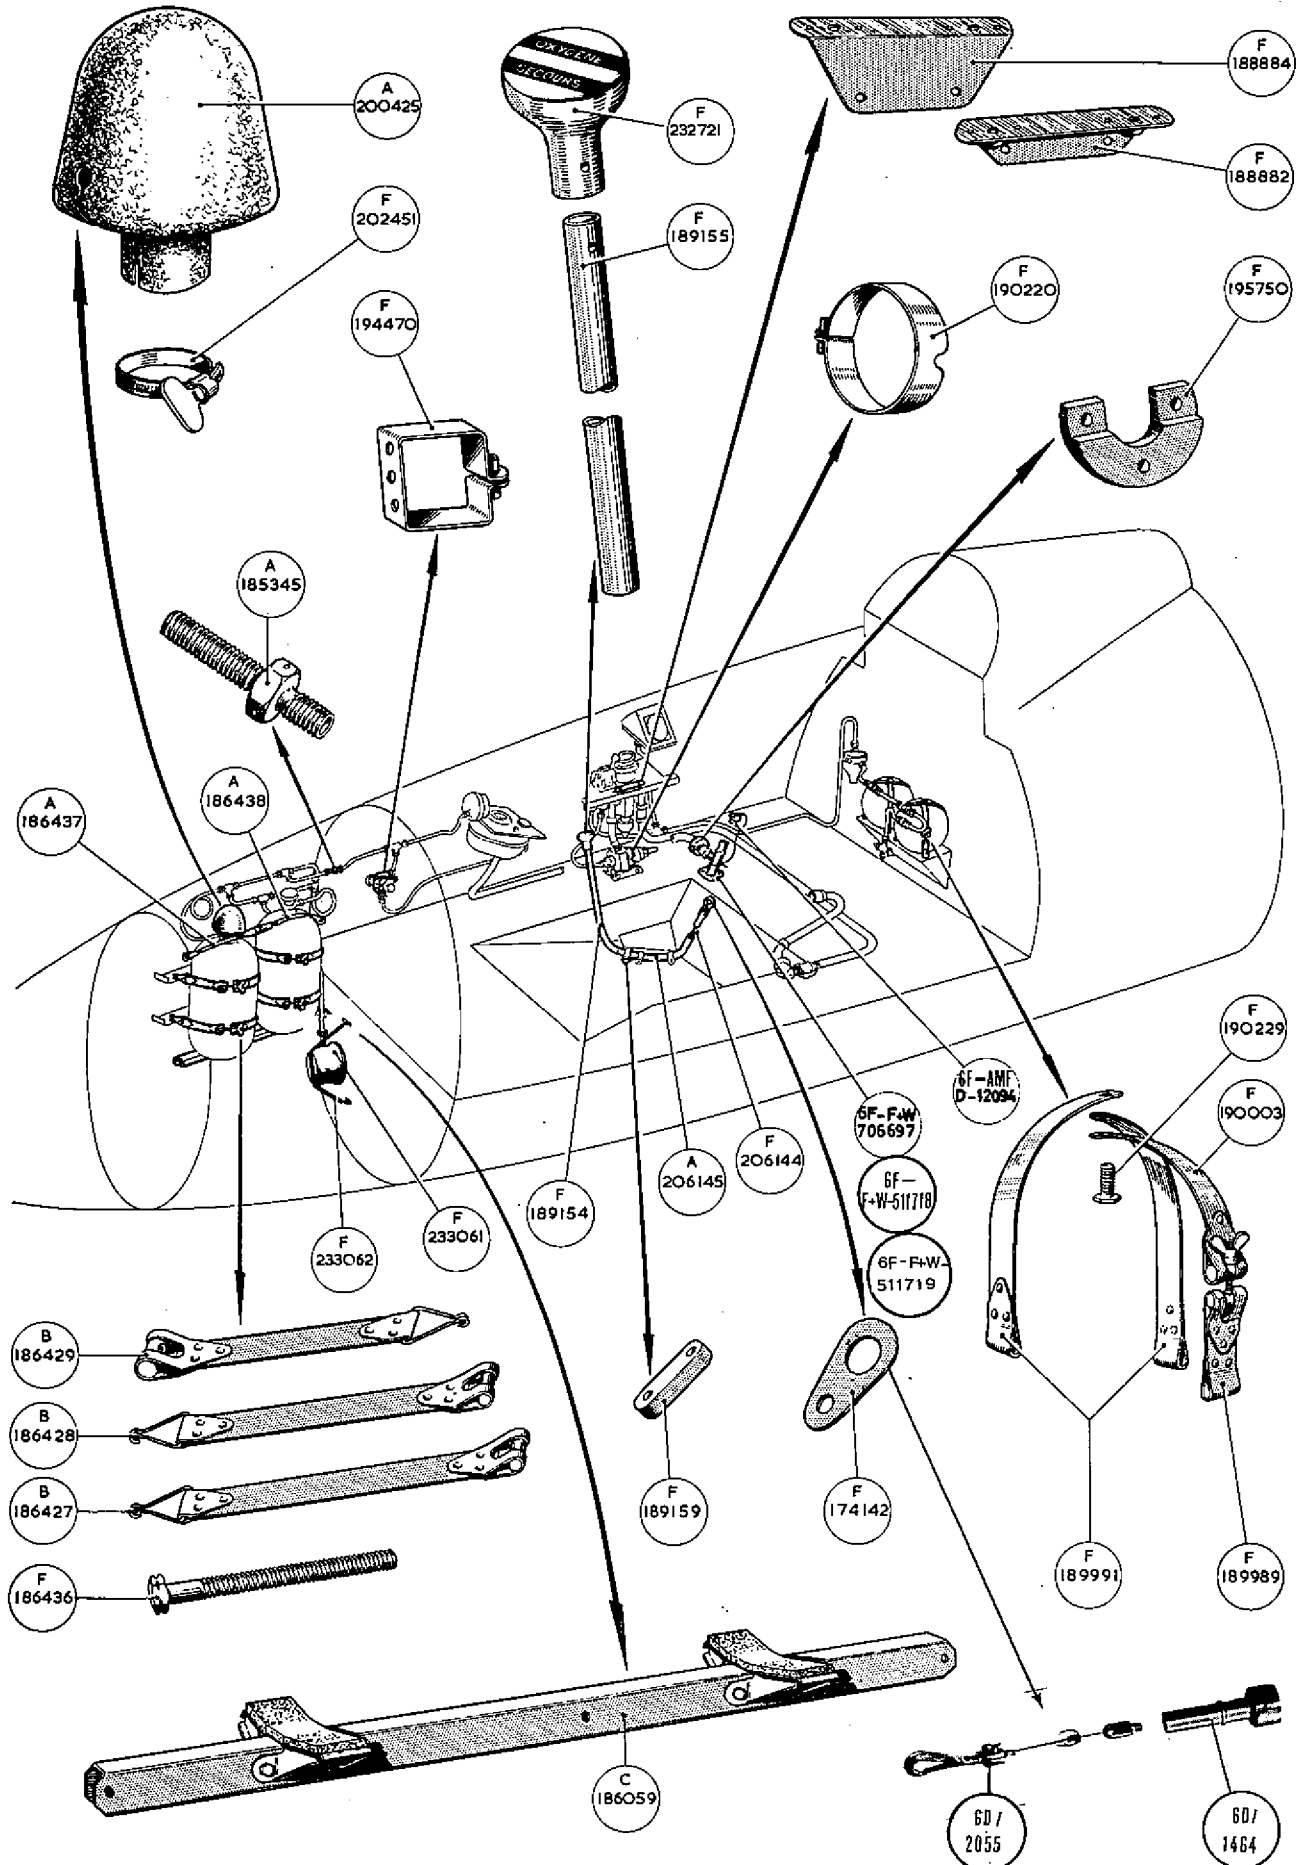

ANTI G & OXYGEN INSTALLATION

This file was downloaded  
from the RTFM Library.

Link: [www.scottbouch.com/rtfm](http://www.scottbouch.com/rtfm)

Please see site for usage terms,  
and more aircraft documents.

