

UK RESTRICTED



**AIR PUBLICATION  
101B-0417-1A**

Sect. 1 to 5

**CANBERRA T. MK. 17 AIRCRAFT  
GENERAL AND TECHNICAL INFORMATION**

THIS DOCUMENT IS THE PROPERTY OF HER BRITANNIC MAJESTY'S GOVERNMENT and is issued for the information of such persons only as need to know its contents in the course of their official duties. Any person finding this document should hand it to a British Forces unit or to a police station for its safe return to the MINISTRY OF DEFENCE, HQ SECURITY, LONDON, SW1A 2HB, with particulars of how and where found. THE UNAUTHORISED RETENTION OR DESTRUCTION OF THE DOCUMENT IS AN OFFENCE UNDER THE OFFICIAL SECRETS ACTS OF 1911 to 1939. When released to persons outside Government Service, this document is issued on a personal basis and the recipient to whom it is entrusted in confidence, within the provisions of the Official Secrets Acts 1911 to 1939, is personally responsible for its safe custody and for seeing that its contents are disclosed only to authorised persons.

BY COMMAND OF THE DEFENCE COUNCIL

*Anne Whitmore.*

Ministry of Defence

Sponsored for use in the

ROYAL AIR FORCE by D.Air.Eng.(RAF)

Prepared by British Aerospace, Aircraft Group, Warton Division

Publications authority: ATP/MOD(PE)

Service users should send their comments through  
the channel prescribed for the purpose in:

AP 100B-01, Order 0504 (RAF)

## AMENDMENT RECORD SHEET

Incorporation of an Amendment List in this publication is to be recorded by signing in the appropriate column and inserting the date of making the amendments

A.L. No.	Amended by	Date
1	INCORPORATED	AUG. 66
2	LW	20/12/66
3	LW	20/12/66
4	LW	20/12/66
5	LW	9/2/67
6	LW	14/3/67
7	LW	14/3/67
8	LW	14/3/67
9		
10		
11		
12	R. Danifera	3/5/67
13		
14		
15		
16	LW	5-7-67
17	LW	5-7-67
18	LW	5-7-67
19		
20	LW	28/12/67
21		
22		
23	R. Danifera	20/2/68
24		

A.L. No.	Amended by	Date
25	YES	20/6/68
26	YES	20/6/68
27	YES	20/6/68
28		20/6/68
29	YES	20/6/68
30	YES	20/6/68
31	YES	20/6/68
32	YES	20/6/68
33	YES	20/6/68
34	CRW	6/9/69
35	CRW	6/9/68
36	CRW	6/9/68
37	KM (not yet)	2/1/70
38	Relaxa	20/10/70
39	KM	2/1/70
40	KM	2/1/70
41	R. Clarkson	20/10/70
42	R. Clarkson	20/10/70
43	V.E. Taylor	29/3/71
44	V.E. Taylor	29/3/71
45	V.E. Taylor	10/11/71
46	V.E. Taylor	9/2/72
47	NOT Yet Recd	
48	E. Bates	16/10/73

A.L. No.	Amended by	Incorporated (AL)	Date
49	E. Bates	AUG 73	4/10/74
50	E. Bates	AUG 1974	4/10/74
51	E. Bates	SEP 1974	22.10.74
52	Pleacock	MARCH 1975	1.5.75
53	Pleacock	MARCH 1975	1.5.75
54	B. Bell	OCT 1975	19.2.76
55	B. Bell	NOV 75	17.3.76
56	B. Bell	DEC 75	17.3.76
57			
58	M. Hall	JAN 76	10.6.76
59		MAY 76	
60	M. Hall	SEP 76	11.11.76
61	M. Hennings	OCT 76	22.12.76
62	C. Thomson	JAN 77	01.01.77
63	M. Miner	JAN 78	13/1/78
64	O. Kennington	JULY 78	22/8/78
65	B. Bell	JULY 78	4.1.79
66	B. Bell	AUG 78	4.1.79
67	A. Deakin	OCT 78	18.6.79
68	A. Deakin	NOV 78	18.6.79
69	A. Deakin	DEC 78	18.6.79
70	A. Kennington	SEPT 79	11.1.80
71	A. Kennington	SEPT 79	11.1.80
72	A. Kennington	AT 20/1/80	11.1.80

(Continued overleaf)

RESTRICTED

A.L. No.	Amended by	Date
73	A. Kennington	July 11. 80
74	A. Kennington	Jan 81 4.3.81
75	A. Kennington	Mar 81 4.6.81
76	A. Sherrington	Jan 28.8.81
77	A. Sherrington	July 23.10.81
78	A. Sherrington	Aug 23.10.81
79	A. Sherrington	Nov 81 14.1.82
80	A. Sherrington	Nov 81 23.2.82
81	A. Sherrington	Feb 82 24.3.82
82	A. Sherrington	Mar 82 26.4.82
83	A. Sherrington	Mar 82 27.4.82
84	A. Sherrington	Mar 82 29.4.82
85	E. Bullington	22/12/82
86	E. Bullington	25.1.83
87	E. Bullington	25/1/83
88	E. Bullington	25.1.83
89	E. Bullington	4.3.83
90	E. Bullington	14.4.83
91	E. Bullington	14.4.83
92	E. Bullington	5.5.83
93	E. Bullington	29.6.83
94	G. Howley	18.11.83
95	G. Howley	18.11.83
96	G. Howley	18.11.83
97	G. Howley	18.11.83
98	G. Howley	18.11.83
99	G. Howley	18.11.83
100	G. Howley	19.7.84

A.L. No.	Amended by	Date
101	G. Howley	19.7.84
102	G. Howley	19.7.84
103	G. Howley	19.7.84
104	G. Howley	2.1.85
105	G. Howley	2.5.85
106	G. Howley	25.7.85
107	G. Howley	25.7.85
108	G. Howley	26.8.85
109	G. Howley	26.8.85
110	G. Howley	4.7.86
111	G. Howley	4.7.86
112	E. Bullington	25.11.86
113	E. Bullington	25.11.86
114	E. Bullington	4.8.87
115	E. Bullington	4.8.87
116	E. Bullington	19.8.88
117	P. Doonan	24.5.89
118	P. Doonan	24.5.89
119	P. Doonan	17.7.89
120		
121	M. CATTERALL	20/8/90
122	M. CATTERALL	19/10/90
123	M. Catterall	19.12.90
124	G. Howley	4.6.92
125	G. Howley	4.6.92
126	M. G. PIGOTT	17.9.92
127		
128		

A.L. No.	Amended by	Date
129		
130		
131		
132		
133		
134		
135		
136		
137		
138		
139		
140		
141		
142		
143		
144		
145		
146		
147		
148		
149		
150		
151		
152		
153		
154		
155		
156		

RESTRICTED

**LETHAL WARNINGS****ENTRY INTO CABIN**

Before entering the cabin, personnel must report to the N.C.O. i/c the aircraft, who will ensure that all the relevant safety precautions have been taken.

**ASSISTED ESCAPE SYSTEM**

1. Ejection seats and canopy jettison mechanisms are sources of potential danger to personnel and of damage to the aircraft. Serious injury (possibly fatal) may result if any firing mechanisms are inadvertently operated whilst the aircraft is on the ground.

2. The following instructions detailing the responsibilities and positioning of the assisted escape system safety devices are to be strictly adhered to:-

R.N. Safety precautions contained in A.P.(N) 140 - Naval Aircraft Maintenance Manual.

R.A.F. Lethal Warnings contained in the A.P.101B-0400-5A2, Safety and Servicing Notes.

3. Additional information concerning assisted escape system safety device positioning is to be found in the Aircraft Servicing Schedules and A.D.5037A Air Diagram.

**GENERAL**

CANOPY JETTISON : EXPLOSIVE BOLTS  
CREW HATCH JETTISON : EXPLOSIVE BOLTS  
CONTROL COLUMN RELEASE : EXPLOSIVE COLLAR  
WING TIP POD/TANK JETTISON : EXPLOSIVE BOLTS

Personnel are warned not to interfere with the controls associated with this equipment unless the following precautions have been carried out:-

- (a) The internal service batteries and the detonator-circuit emergency batteries are disconnected and no ground electrical supply is connected to the external supply socket.
- (b) The detonator leads are disconnected where necessary.
- (c) The detonators are removed where necessary.

**Note . . .**

*Detonators are not to be held in the hand. During all operations, detonators must be supported by their electrical leads. Hold the leads near the detonator base. THIS IS MOST IMPORTANT.*

**MICRO WAVE RADIATION**

4. There is a micro wave radiation hazard from certain radar equipment in this aircraft. To avoid injury to health, all personnel are to keep clear of the areas indicated when warning notices are displayed.

**HIGH ENERGY IGNITERS**

5. The energy stored in the capacitors of high energy igniter units can be of a lethal nature. No servicing should be attempted until at least one minute has elapsed after disconnection of the L.T. supply to the input plug.

**HIGH VOLTAGE ELECTRICAL SYSTEMS**

6. Voltages in excess of 30 volts (R.M.S.) a.c. or 50 volts d.c. can in certain circumstances be lethal. When working on such systems requiring the exposure of live terminals, a second tradesman is always to be in attendance.

*continued...*

### ELECTROMAGNETIC COMPATIBILITY

The electrically-initiated explosive devices listed below are screened and therefore not potentially dangerous as long as they remain in situ regardless of whether or not H.F. radio or radar equipment is being operated. Similarly, engine starter cartridges properly carried in the stowage provided are harmless in these conditions.

Canopy and hatch explosive bolts

Elevator control rod explosive collar

Wing-tip pod/tank explosive bolts

Discharger cartridges

Fire-extinguisher cartridges

Engine starter cartridges

All these devices become potentially lethal, however, during loading or unloading if, at the same time, H.F. radio or radar equipment is being operated. Therefore:

(1) Stores containing electrically-initiated explosive devices are not to be loaded or unloaded during operation of H.F. radio or radar equipment.

(2) H.F. radio or radar equipment is not to be operated during loading or unloading of stores containing electrically-initiated explosive devices.

(3) Spare engine starter cartridges in the aircraft stowage are not to be allowed to contact metallic objects while H.F. radio or radar equipment is being operated.

### TOXIC MATERIAL BERYLLIUM/BERYLLIA

A.R.I. 23362/0 and A.R.I. 23363

The equipment within this system incorporates the highly toxic material Beryllium and/or its oxide Beryllia. These materials are especially hazardous if:

(1) Beryllium materials are absorbed into the body tissues through the skin, mouth or a wound.

(2) The dust created by breakage of Beryllia is inhaled.

(3) Toxic fumes are inhaled from Beryllium/Beryllia involved in a fire. ►

## NOTE TO READERS

The subject matter of this publication may be affected by Defence Council Instructions, Servicing Schedules, or 'General Orders and Modifications' leaflets in this A.P., in the associated publications listed overleaf, or even in some others. If possible, Amendment Lists are issued to correct this publication accordingly, but it is not always practicable to do so. When an Instruction, Servicing Schedule or leaflet contradicts any portion of this publication, the Instruction, Servicing schedule or leaflet is to be taken as the overriding authority.

A.L.68 introduces Canberra Mod. 5466 in the form of a supplement to this publication. Where an aircraft system differs from that fitted to pre Mod. 5466 aircraft, reference should be made to the supplement. Where a system is the same for both Mod. states in the context of this publication, reference should be made to the main section of the publication.

A.L.68 also deletes circuit and routeing diagrams from this publication. For details of aircraft circuits and cable routeing, refer to A.P.101B-0417-10, Servicing Diagrams Manual.

The inclusion of references to items of equipment does not constitute authority for demanding the items.

Each leaf, except the original issue of preliminaries, bears the date of issue and the number of the amendment List with which it was issued. New or amended technical matter will be indicated by triangles positioned in text thus: ◀---▶ to show the extent of amended text, and thus: ▶◀ to show where text has been deleted. When a Section or Chapter is issued in a completely revised form, the triangles will not appear.

If more than one copy of this publication is held, each set of covers should be given a copy number and kept together.

UK RESTRICTED

## PREFACE

Because of the volume of the information given, A.P.101B-0417-1 is issued as two books, the breakdown being as follows:-

### A.P.101B-0417-1A

Introduction

Leading particulars

Section 1 - Controls and exits

Section 2 - Ground handling and preparation for flight

Section 3 - Airframe

Section 4 - Power unit installation

Section 5 - Armament installation

### A.P.101B-0417-1B

Introduction

Leading particulars

Section 6 - Electrical installation

Section 7 - Instrument installation

Section 8 - Radio installation

Section 9 - Radar installation

◀ Supplement - Post Mods. 5466 and 5541 ▶

UK RESTRICTED

LAYOUT OF A.P.101B-0417

101B-0417-1A and 1B ..... General and technical information  
101B-0417-2 ..... General orders and modifications  
101B-0417-3A ..... Schedule of spare parts  
101B-0417-3B ..... Appendix 'A'  
101B-0417-3C ..... Scales of unit equipment  
101B-0417-3D ..... Scales of servicing spares  
101B-0417-5 ..... Periodic servicing schedule  
101B-0400-6 ..... Repair and reconditioning instructions  
◀101B-0417-10 ..... Servicing diagrams manual ▶  
101B-0417-12 ..... Ground handling notes  
◀101B-0417-13 ..... Modification lists ▶  
101B-0417-15 ..... Pilot's notes  
101B-0417-16 ..... Operating data manual

**RESTRICTED**

**PREFACE**

Because of the volume of the information given, A.P.101B-0417-1 is issued as two books, the breakdown being as follows:-

**A.P.101B-0417-1A**

Introduction

Leading particulars

Section 1 - Controls and exits

Section 2 - Ground handling and preparation for flight

Section 3 - Airframe

Section 4 - Power unit installation

Section 5 - Armament installation

**A.P.101B-0417-1B**

Introduction

Leading particulars

Section 6 - Electrical installation

Section 7 - Instrument installation

Section 8 - Wireless installation

Section 9 - Radar installation

**RESTRICTED**

## MODIFICATION STANDARD

This publication has been written to the Canberra T Mk.17 modification standard Y2 leaflet plus the modifications recorded on the following list. Modifications introduced subsequently are listed on a separate page.

1	150	270	328	504	644	1009	1453	2186	2705	3962	4469	5046
2	153	272	332	505	706	1016	1454	2301	2712	4000	4489	5048
3	154	275	333	506	710	1021	1464	2316	2740	4045	4491	5050
4	155	276	334	507	711	1022	1465	2317	3156	4058	4493	5051
8	157	277	335	508	713	1024	1466	2334	3299	4063	4704	5058
9	161	278	337	509	714	1033	1470	2335	3330	4077	4706	5059
10	164	279	340	512	716	1040	1474	2347	3333	4078	4707	5060
11	165	280	343	513	721	1050	1477	2348	3352	4080	4715	5061
12	167	281	344	514	730	1151	1493	2353	3367	4107	4726	5079
13	170	282	346	519	731	1152	1498	2379	3368	4151	4781	5087
14	171	283	347	523	739	1160	1499	2380	3390	4152	4783	5091
15	174	291	349	531	745	1165	1703	2386	3391	4160	4788	5093
16	175	292	401	533	749	1169	1705	2392	3423	4220	4792	5096
18	176	293	403	535	750	1170	1707	2394	3428	4222	4797	5101
19	178	294	405	536	851	1171	1714	2395	3429	4270	4855	5105
51	180	295	408	537	852	1175	1716	2501	3481	4271	4858	5106
53	181	296	409	538	853	1176	1720	2511	3487	4286	4865	5111
54	182	297	411	540	857	1189	1721	2517	3521	4303	4869	5112
56	184	299	418	541	858	1197	1728	2519	3522	4333	4923	5119
57	185	301	419	542	860	1254	1734	2523	3564	4335	4925	5177
62	186	302	420	543	862	1266	1736	2531	3593	4351	4926	5184
63	187	303	421	545	863	1271	1744	2535	3701	4356	4929	5190
66	188	305	422	547	864	1277	1750	2541	3702	4412	4933	5198
67	195	306	424	550	868	1294	1769	2555	3703	4420	4936	5200
68	196	308	427	606	871	1401	1924	2564	3745	4422	4939	
69	197	309	428	607	874	1407	1925	2571	3749	4427	4947	
71	198	311	430	616	878	1421	1960	2580	3773	4429	4949	
80	199	313	433	617	880	1423	1968	2585	3797	4435	4956	
82	250	314	434	618	884	1424	2107	2594	3881	4442	4958	
83	251	315	441	620	886	1425	2133	2614	3883	4448	4959	
85	252	316	442	621	887	1427	2134	2621	3906	4449	4960	
87	255	319	443	628	888	1431	2148	2646	3911	4451	5015	
89	258	321	445	632	894	1432	2151	2670	3937	4454	5027	
90	260	322	447	635	895	1433	2154	2690	3948	4461	5028	
95	261	323	449	640	899	1434	2158	2701	3949	4463	5035	
97	265	324	450	641	1002	1435	2159	2703	3955	4465	5041	
99	269	325	502	643	1008	1450	2183	2704	3960	4468	5045	

MODIFICATIONS INCLUDED SUBSEQUENT TO STANDARD

Modification Number	Effect upon Publication	Incorporated by A.L. number
5118	Amends Sect.3, Chap.6	85
5209	Amends - Leading Particulars	
5216	<ul style="list-style-type: none"> <li>Amends Sect.2, Chap.3</li> <li>Amends Sect.3, Chap.8</li> <li>Amends Sect.3, Chap.8A</li> <li>Amends Sect.3, Chap.8B</li> </ul>	
GE.5224	<ul style="list-style-type: none"> <li>Amends Sect.2, Chap.4</li> <li>Amends Sect.3, Chap.2</li> </ul>	100
5231	<ul style="list-style-type: none"> <li>Amends Sect.1, Chap.2</li> <li>Amends Sect.3, Chap.1</li> </ul>	
5238	Amends Sect.3, Chap.8C	
5249	Amends Sect.2, Chap.3	
5441	<ul style="list-style-type: none"> <li>Amends Sect.1, Chap.3</li> <li>Amends Sect.3, Chap.11</li> </ul>	
5505	Amends - Leading Particulars	108
5506	Amends Sect.3, Chap.11	111
5408	Amends Sect.1, Chap.1	111
5466 (ISS. BY)	Amends Sect.1, 2 and 3	112
GE 5540	Amends Sect.2 and 3	119
◀ 5536	Amends Sect.3, Chap.3	125 ▶

## CONTENTS

## INTRODUCTION
















## LEADING PARTICULARS

SECTION 6 - ELECTRICAL INSTALLATION	...	...	...	...	Chapter 1 - General information (pre Mod. 5466)
					Chapter 2 - Armament (pre Mod. 5466)
					Chapter 3 - Flying controls
					Chapter 4 - Instrument power supplies (pre Mod. 5466)
					Chapter 5 - Alighting gear (pre Mod. 5466)
					Chapter 6 - Heating and air conditioning (pre Mod. 5466)
					Chapter 7 - Engine starting and control
					Chapter 8 - Lighting (pre Mod. 5466)
					Chapter 9 - D.C. power supplies
					Chapter 10 - Fuel system
					Chapter 11 - Radio and radar power supplies (pre Mod. 5466)
					Chapter 12 - Warning and emergency services
					Chapter 13 - A.C. power supplies (pre Mod. 5466)
SECTION 7 - INSTRUMENT INSTALLATION	...	...	...	...	Chapter 1 - General information (pre Mod. 5466)
					Chapter 2 - Miscellaneous instruments
					Chapter 3 - Engine instruments
					Chapter 4 - Flight instruments (pre Mod. 5466)
SECTION 8 - RADIO INSTALLATION	...	...	...	...	Chapter 1 - Intercommunication (pre Mod. 5466)
					Chapter 2 - H.F. radio (pre Mod. 5466)
					Chapter 3 - V.H.F. radio
					Chapter 4 - U.H.F. radio (pre Mod. 5466)
					Chapter 5 - V.O.R./I.L.S. (pre Mod. 5466)
					Chapter 6 - Radio compass (pre Mod. 5466)
					Chapter 7 - Radio altimeter
SECTION 9 - RADAR INSTALLATION	...	...	...	...	Chapter 1 - Green satin (pre Mod. 5466)
					Chapter 2 - I.F.F. (pre Mod. 5466)
					Chapter 3 - Tacan (pre Mod. 5466)
					Chapter 4 - Special equipment (pre Mod. 5466)

◀ SUPPLEMENT (post Mod. 5466 and 5541 aircraft only) ▶

## LUBRICATION - OILS AND GREASES


THE LUBRICATION DIAGRAMS THROUGHOUT THIS PUBLICATION REFER TO OILS AND GREASES BY SYMBOLS. REFERENCE MUST ALWAYS BE MADE TO THIS MARKER CARD FOR INTERPRETATION OF THE LUBRICANT REQUIRED AND THE METHOD OF APPLICATION.

SYMBOL	NOMENCLATURE	REFERENCE NO.	N.A.T.O. CODE NO.
	Oil OEP-71	34B/9100540	O-136
	Oil OM-15	(1 gall.) 34B/9100572 (45 gall.) 34B/2202291	H-515
	Oil OM-150	34B/9100550	O-140
	Oil OX-14	(2 oz) 34B/9100589 (1/2 pint) 34B/9100590	O-147
	Oil OX-38	(1 gall.) 34B/9100591 (45 gall.) 34B/2201941	O-149
	Grease XG-235	34B/9440585	G-363
	Grease XG-271	34B/9100510	G-382
	Grease XG-273	34B/9423151	G-357
	Grease XG-276	34B/9425139	G-353
	Grease XG-287	(2 oz.) 34B/2241973 (28 lb.) 34B/2241861	G-354
	Grease XG-293	34B/2241797	G-395
	Grease XG-315	(4 oz.) 34B/2201438 (225 gm.) 34B/2204466	G-394
	Grease SP-5	34B/2247686	
	Grease ZX-38	34B/9437518	S-722
	Grease ZX-32	34B/2202430	S-717

## METHOD OF APPLICATION SYMBOLS



GUN



OILCAN



HAND



LUBRICATED ON ASSEMBLY ONLY

UK RESTRICTED



FIG. 1. CANBERRA T. Mk. 17

◀TITLE AMENDED▶

## INTRODUCTION

1. The Canberra T Mk.17, a twin-engined, jet-propelled trainer, is a mid-wing monoplane with retractable tricycle alighting gear. The aircraft is powered by two Rolls-Royce Avon Mk.102 engines, one mounted in each main plane. It carries a crew of three, each of whom is provided with an ejection seat.

2. The all-metal fuselage is of monocoque construction, consisting of a stressed skin covering supported by a framework of transverse frames connected by longitudinal stringers; it is built in three units - front, centre and rear fuselage. To facilitate assembly of the complete aircraft and dismantling into main units, junctions are provided in all controls, hydraulic pipes, electrical wiring etc., at the ends of the units into which they are built.

3. The front fuselage comprises a forward radome, a pressurized cabin sealed off from the remainder of the fuselage by a pressure bulkhead placed diagonally across the fuselage, equipment compartments, and the alighting gear nose-wheel unit. A door, which may be jettisoned in an emergency, is provided on the starboard side of the cabin for normal entry and exit. The pilot's canopy and the hatch above the navigator's and air electronics operator's (A.E.O.) seats are both jettisonable, and provide emergency escape exits for the crew members. The pilot's seat is offset, to improve visibility, to port of the centre line of the aircraft, and the navigator's and A.E.O.'s seats are at the rear of the cabin, side by side and backed on to the pressure bulkhead; the seats are mounted on separate support structures raising them above the level of the main cabin floor. A curtain, fitted to the canopy coaming cross tube, when lowered, divides the crew station from the pilot's station; curtains are also fitted to the navigator's window and the hatch windows, and a sun blind is positioned above the pilot's seat.

4. A metal floor, supported by arched diaphragm members, divides the centre fuselage into fuel and electronic equipment pack bays. Three fireproof tanks are carried in the fuel bay; the forward and centre tanks are self-sealing and rigidly supported by internal

bracing structures; the rear tank is a crash-proof collapsible fuel bag. The main plane centre section frame is an integral part of the fuselage and, passing through the fuel bay, forms a bulkhead between the centre and rear tanks. Aft of the rear tank the fuel bay is sealed by a removable bulkhead. The pack bay is of full fuselage width with a bulkhead at each end. The forward bulkhead carries a hydraulic jack which operates the shutters of three air-inlet scoops.

5. The rear fuselage carries the tail unit, which comprises a metal rudder and tail plane and a wood-and-metal fin. The tail plane is fitted with an incidence adjustment unit designed to give positive control at high Mach numbers. The incidence is varied by an electrical actuator which ensures irreversibility of control under any condition of flight and enables quick changes to be made in fore-and-aft trim during take-off, flight, and landing. The elevators are of conventional design and incorporate a spring tab in the port, and a geared, fixed-movement balance tab in the starboard elevator. Forward of the spar the fin is of wooden construction, aft of the spar the rudder shroud is of metal with the aerofoil section maintained by flanged plate ribs. The rudder is all-metal and incorporates a spring tab which, through an electrical actuator, acts also as a trim tab; it is so arranged that full travel is available for either function. The rear fuselage tail fairing incorporates the rear radome.

6. The main planes are all-metal cantilever structures of symmetrical section, with a main spar and a sectional rear wall, carrying the power units mounted mid-wing. The main spar is a single web with machined booms, the web cut away and reinforced by ring plates for the accommodation of the engine jet pipe. Four main and seven shear bolts attach the spar root to the main spar centre section in the fuselage. The rear wall consists of three pressed sections, the inner and centre sections being attached to a forged ring through which the engine jet-pipe passes; at the main-plane root, the inner section is attached by one bolt to a fuselage pick-up point. The outer section has a curved web which forms the forward wall of the pressure-balance box. The inner leading-edge section of the main plane, into which the main undercarriage unit retracts, is divided transversely by a diaphragm which

forms the front wall of the wheel well; extending from the inboard engine-rib to the fuselage, the diaphragm is attached by one bolt to the fuselage. The main plane and fuselage skins intersect smoothly without fillet, the skin at the main-plane root fitting over a joint angle riveted to the fuselage. Each main plane is fitted with air brakes, aileron, and split flaps. Provision is made for fitting jettisonable fuel tanks or jettisonable window-dispensing pods to the wing tips. The leading edge of each outer main plane houses a turbo-alternator which provides a.c. power supplies for the special equipment carried in the pack bay.

7. The flying controls are conventional, rudder pedals operating the rudder, and a horn-type control operating the ailerons and elevators. All control runs consist of push-pull tubes and levers.

8. The fully-retractable tricycle alighting gear is operated hydraulically through electrically-actuated selectors, the main units retracting inwards into the main planes and the nose-wheel unit retracting rearward into the front fuselage. The main unit struts are oleo-pneumatic with single wheels mounted in cantilever and with hydraulic disc-type brakes. The nose-wheel unit is fully castering and self-centring with twin wheels keyed together to eliminate shimmy.

9. The engines are attached to engine ribs just forward of the main spar. Each is slung on four self-aligning attachments, the collar of the rear outboard mounting being allowed to float to take up expansion. All auxiliaries are mounted on gearboxes inboard of the engines. Turbo-starters are fitted, the units being faired into the engine air-intakes. Oil is carried in the engine sumps only and

is cooled by fuel-cooled oil coolers mounted on the engines. Air from the engine compressors final stage drives the appropriate turbo-alternator via a gearbox.

10. Fuel galleries connect each engine with the fuel tanks. Two fuel pumps are submerged in each tank, separate switches operate each pump together with its associated low-pressure cock. Fuel from the wing-tip tanks is transferred to No.3 tank by air pressure ducted from the engine compressor casings. Smith-Waymouth capacitor-type gauge units are fitted in all fuselage fuel tanks and operate the fuel contents gauges on the engine panel in the cockpit. A fuel tank venting system is also installed. Flame detectors and spray pipes are installed in the tank and pack bays in the fuselage and in the engine bays.

11. All d.c. electrical power supplies for electrical, instrument, radio and radar equipment, are supplied by two 6 kilowatt engine-driven d.c. generators, operating in parallel, which also charge the four 12 volt batteries. The a.c. supplies for electrical, instrument, radio, radar, and special electronic equipment, are obtained from the two turbo-alternators; alternative a.c. supplies, for conditions of low engine speed, are provided by two inverters. Two 12 volt batteries, independent of the main system, supply emergency power for the detonator circuits, the turn and slip indicator and emergency lighting, in the event of failure of the main d.c. supply.

12. Radio, radar and special electronic equipment, suitable to the role of the aircraft, is installed; controls and associated equipment are installed in positions convenient to the crew member concerned.

UK RESTRICTED

UK RESTRICTED

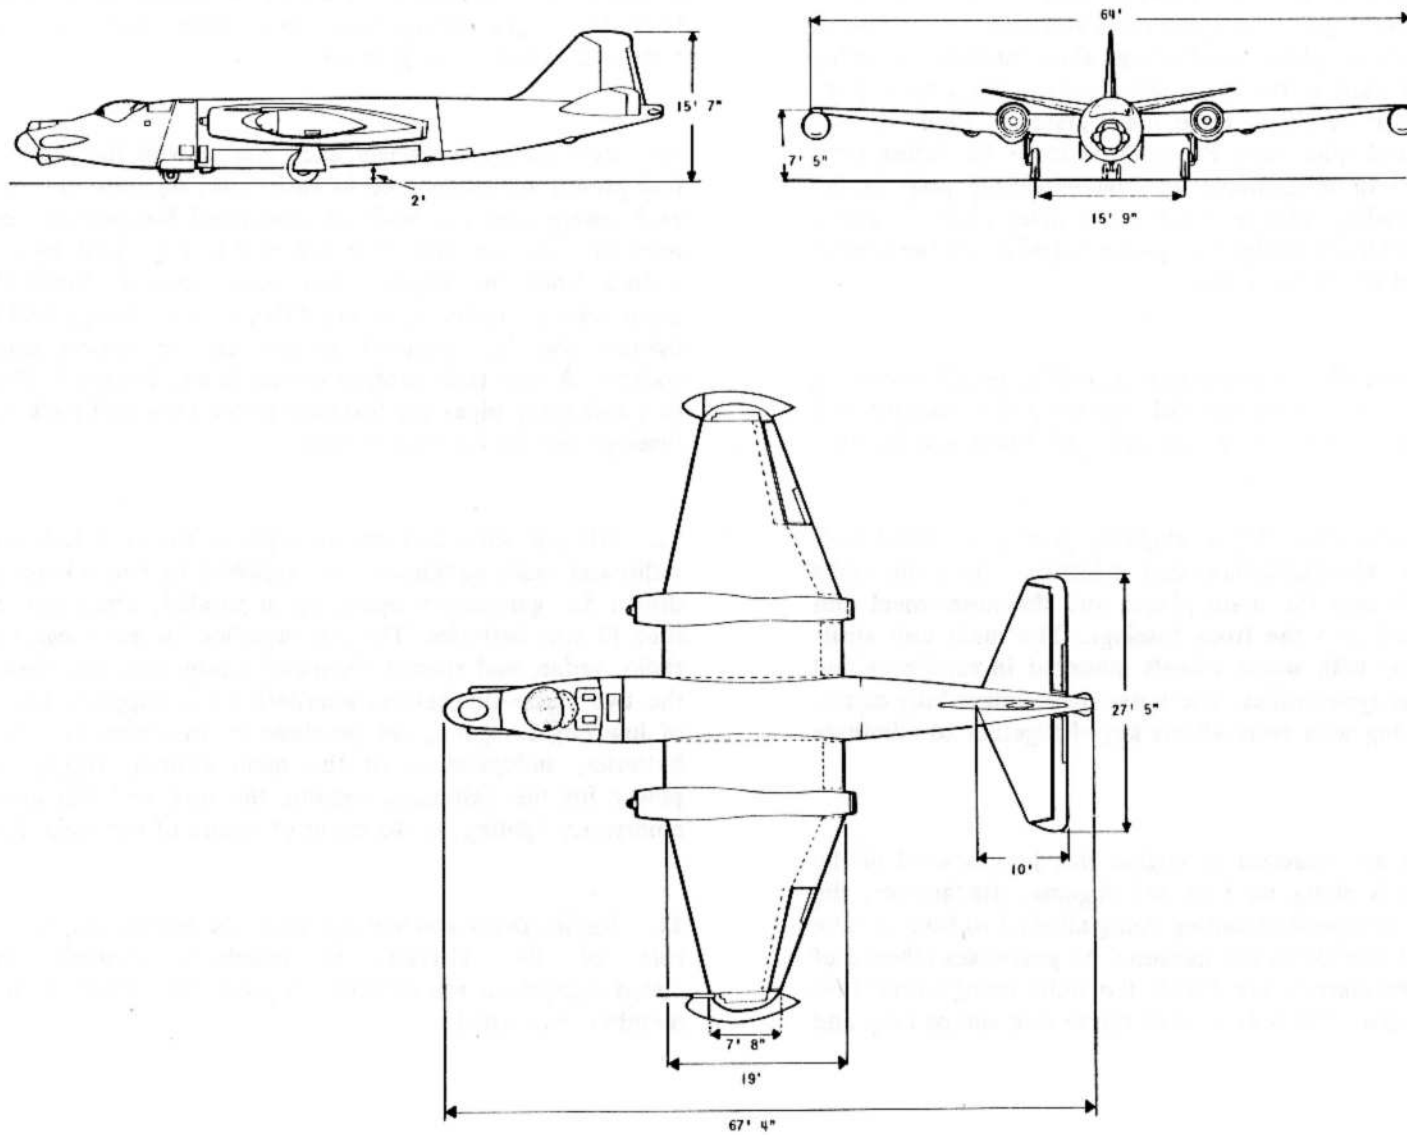


FIG. 2. GENERAL ARRANGEMENT—CANBERRA T. Mk. 17



◀ TITLE AMENDED ▶

UK RESTRICTED

**CANBERRA-T. Mk.17  
ZONES**

◀ *(New Section)* ▶

UK RESTRICTED

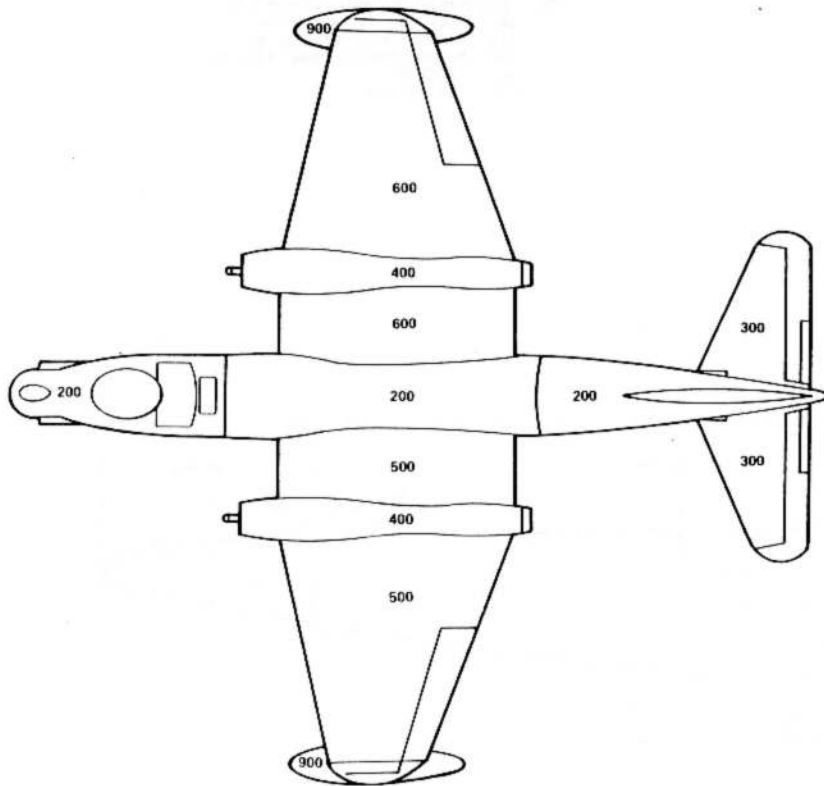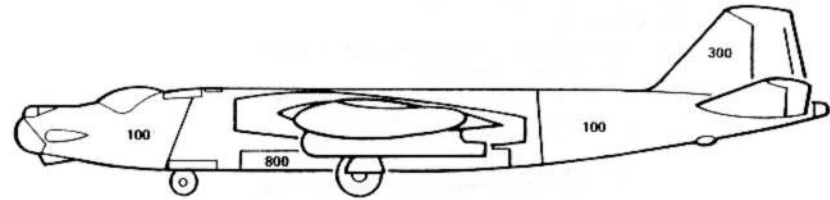

MAJOR ZONES

- 100 - LOWER FUSELAGE
- 200 - UPPER FUSELAGE
- 300 - TAIL UNIT
- 400 - ENGINE AND JET PIPE BAY
- 500 - PORT WING
- 600 - STBD. WING
- 700 - LANDING GEAR AND DOORS
- 800 - DOORS
- 900 - SPECIAL FIT EQUIPMENT

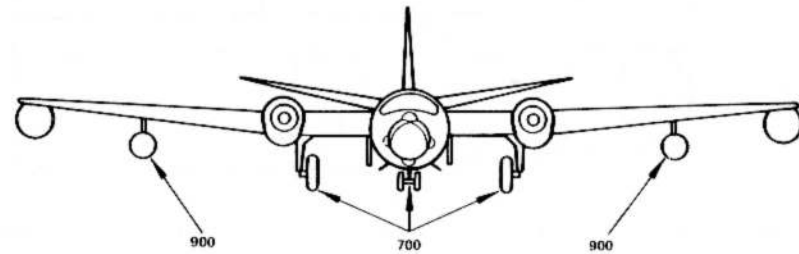


FIG. 3. GENERAL ARRANGEMENT OF MAJOR ZONES

MAJOR ZONES 100 AND 200 - LOWER AND UPPER FUSELAGE

MAJOR ZONE 100 - LOWER FUSELAGE

SUB-MAJOR ZONES

110 - FUSELAGE FORWARD OF THE PRESSURE BULKHEAD

111 BENEATH CABIN FLOOR

120 - FUSELAGE FROM PRESSURE BULKHEAD TO FRAME 21

121 PORT EQUIPMENT COMPARTMENT  
 122 STARBOARD EQUIPMENT COMPARTMENT  
 123 NOSE WHEEL BAY  
 124 BATTERY COMPARTMENT  
 125 FORWARD EQUIPMENT PACK COMPARTMENT

130 - FUSELAGE FROM FRAME 21 TO 31

131 REAR EQUIPMENT PACK COMPARTMENT

MAJOR ZONE 200 - UPPER FUSELAGE

SUB-MAJOR ZONES

210 - FUSELAGE FORWARD OF THE PRESSURE BULKHEAD

211 NOSE SECTION FORWARD OF FRAME 1  
 212 CABIN

220 - FUSELAGE FROM PRESSURE BULKHEAD TO FRAME 21

221 MAIN EQUIPMENT COMPARTMENT  
 222 No.1 FUEL TANK  
 223 No.2 FUEL TANK

230 - FUSELAGE FROM FRAME 21 TO 31

231 No.3 FUEL TANK  
 232 AREA FROM FRAME 27 TO 29  
 233 AREA FROM FRAME 29 TO 31

240 - FUSELAGE FROM FRAME 31 REARWARDS

241 AREA FROM FRAME 31 TO 42  
 242 AREA FROM FRAME 42 TO 46  
 243 REAR FAIRINGS (FRAME 46 TO 42F)  
 244 FIN STUB  
 245 RUDDER STUB

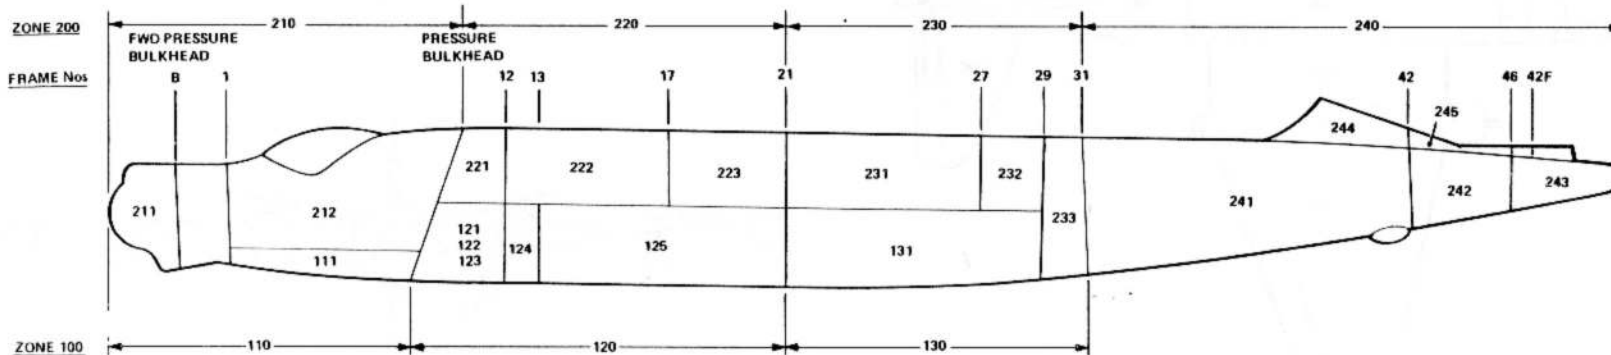


FIG. 4. MAJOR ZONES - LOWER AND UPPER FUSELAGE

UK RESTRICTED

MAJOR ZONE 300 - TAIL UNIT

SUB-MAJOR ZONES

- 310 - PORT TAILPLANE
- 320 - STARBOARD TAILPLANE
- 330 - FIN AND RUDDER

310 - PORT TAILPLANE AND CENTRE SECTION

- 311 TAILPLANE
- 312 ELEVATOR
- 313 TAB
- 314 CENTRE SECTION

320 - STARBOARD TAILPLANE

- 321 TAILPLANE
- 322 ELEVATOR
- 323 TAB

330 - FIN AND RUDDER

- 331 FIN
- 332 RUDDER
- 333 TAB


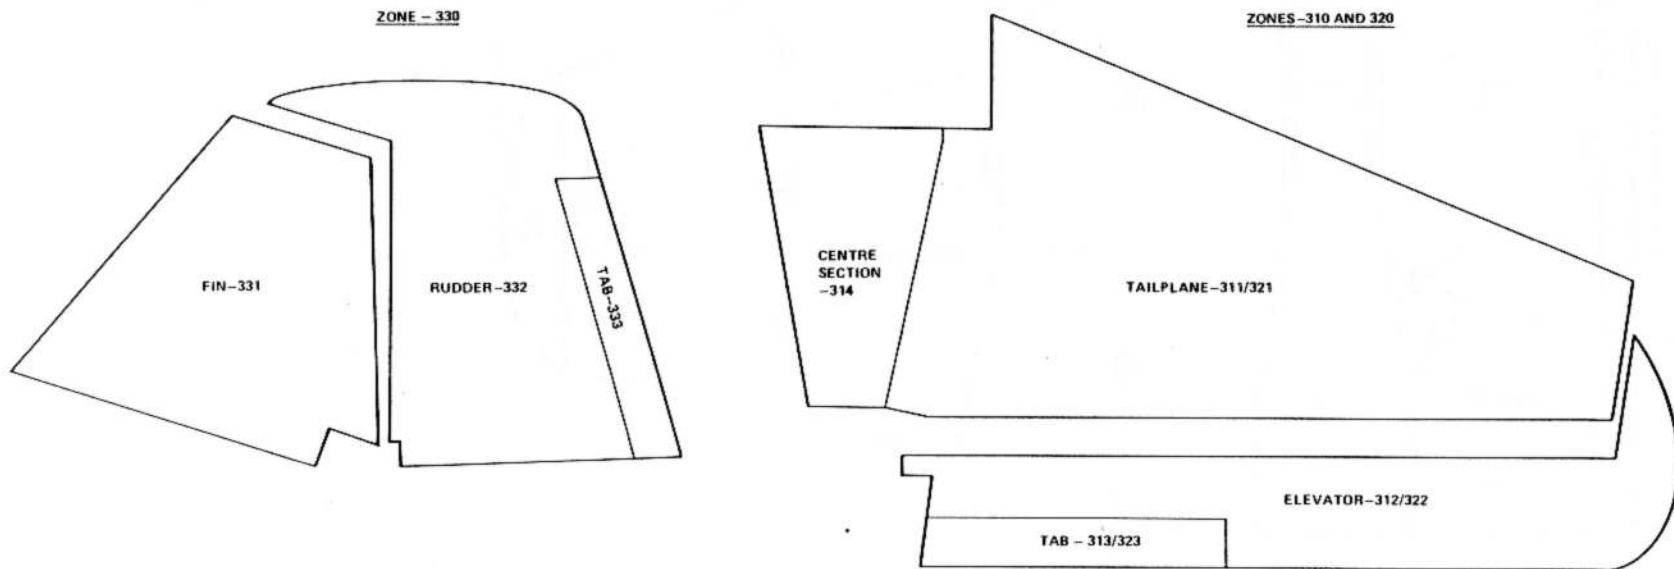


FIG. 5. MAJOR ZONES - TAIL UNIT

MAJOR ZONES - 400,500 AND 600 - PORT AND STARBOARD  
ENGINE/JET PIPE BAYS, PORT AND STARBOARD WINGS

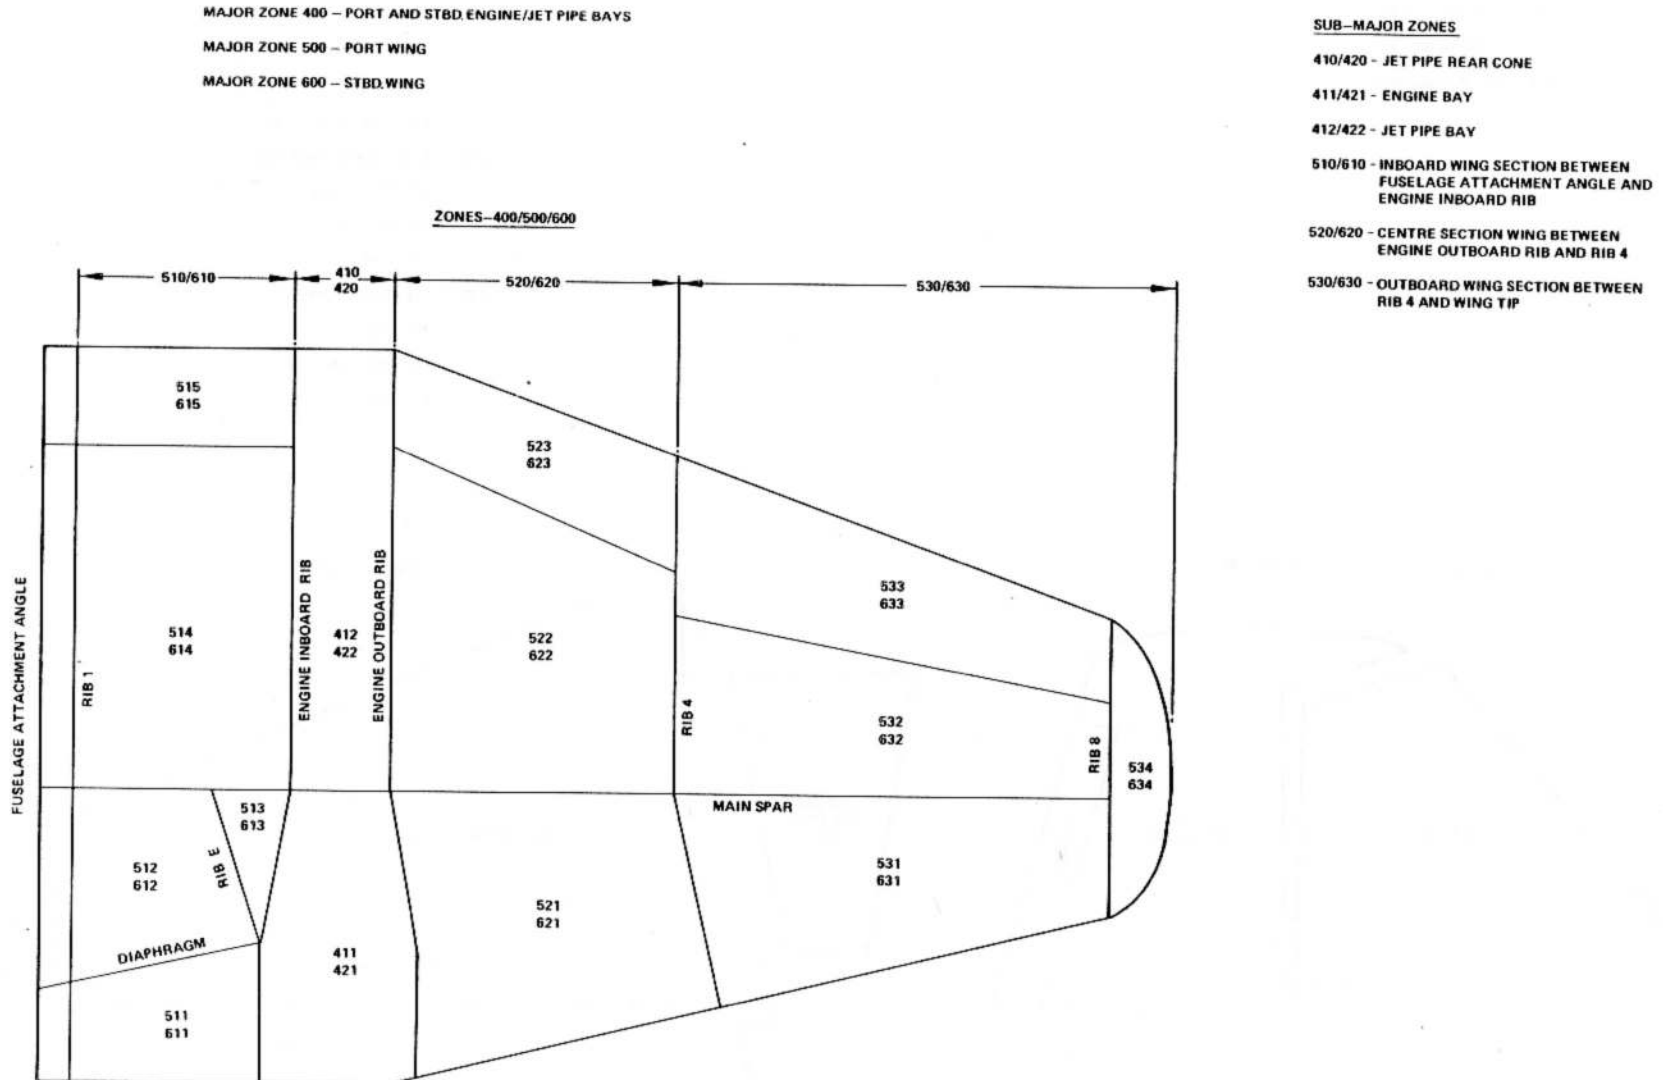


SUB-MAJOR ZONES

- 410/420 - JET PIPE REAR CONE
- 411/421 - ENGINE BAY
- 412/422 - JET PIPE BAY
- 510/610 - INBOARD WING SECTION BETWEEN FUSELAGE ATTACHMENT ANGLE AND ENGINE INBOARD RIB
- 520/620 - CENTRE SECTION WING BETWEEN ENGINE OUTBOARD RIB AND RIB 4
- 530/630 - OUTBOARD WING SECTION BETWEEN RIB 4 AND WING TIP

FIG. 6. MAJOR ZONES - ENGINE AND JET PIPE BAYS AND PORT AND STBD. WINGS

UK RESTRICTED

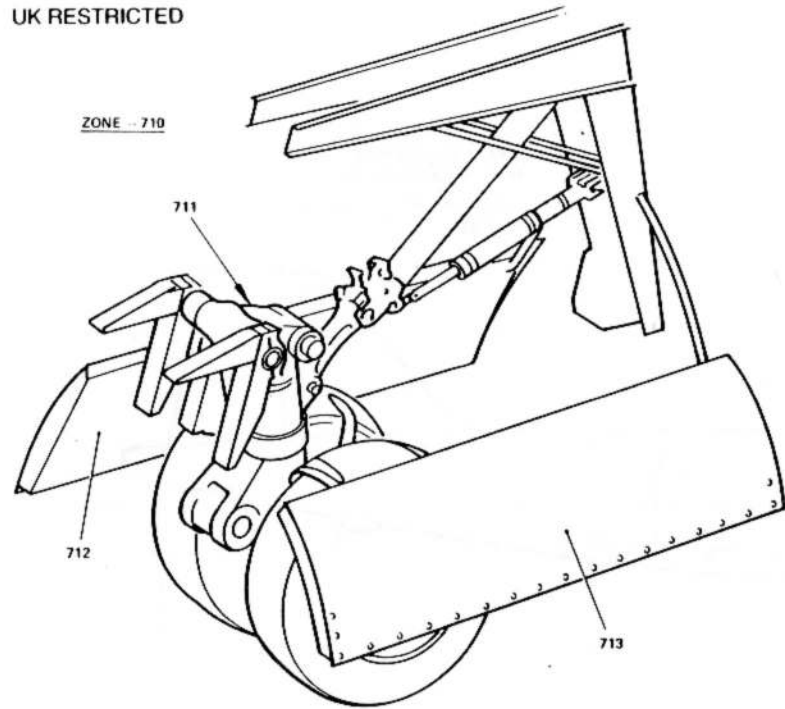

- 710 - NOSE LANDING GEAR AND GEAR DOORS
- 711 NOSE LANDING GEAR
- 712 NOSE LANDING GEAR DOOR RIGHT
- 713 NOSE LANDING GEAR DOOR LEFT
- 720 - STBD, MAIN LANDING GEAR AND GEAR DOORS
- 721 MAIN LANDING GEAR
- 722 MAIN LANDING GEAR SPAT AND FLAP
- 723 MAIN LANDING GEAR DOOR
- 730 - PORT MAIN LANDING GEAR AND GEAR DOORS
- 731 MAIN LANDING GEAR
- 732 MAIN LANDING GEAR SPAT AND FLAP
- 733 MAIN LANDING GEAR DOOR


MAJOR ZONE 700 - LANDING GEAR AND DOORS

SUB-MAJOR ZONES

710 - NOSE LANDING GEAR AND GEAR DOORS

720 - STBD, MAIN LANDING GEAR AND GEAR DOORS

730 - PORT MAIN LANDING GEAR AND GEAR DOORS

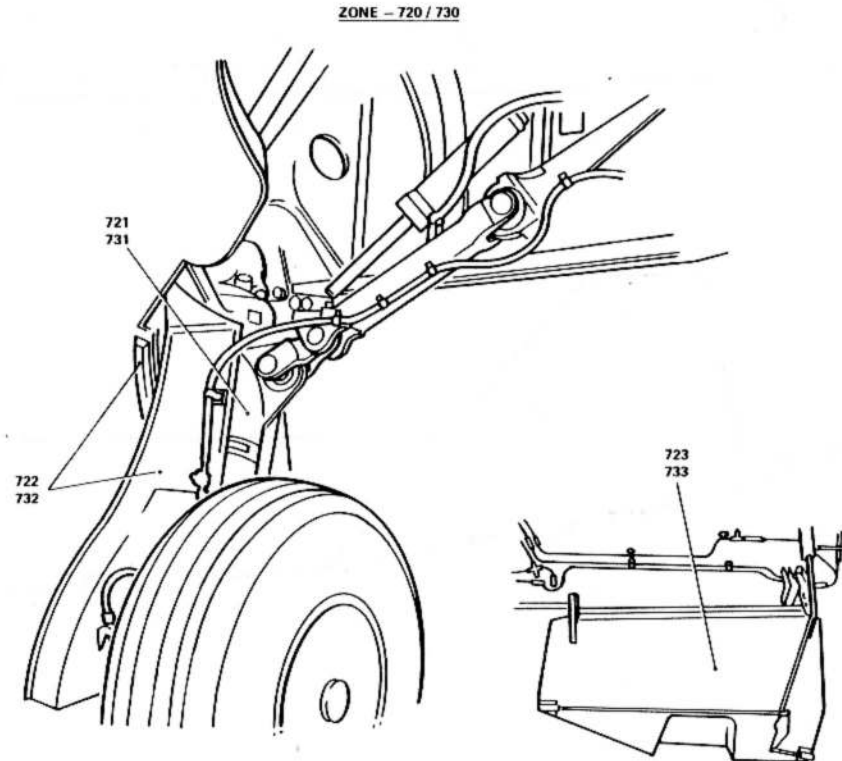

**FIG. 7. MAJOR ZONES - LANDING GEAR AND DOORS**

MAJOR ZONE 800 - DOORS

SUB MAJOR ZONES

810 - LOWER FUSELAGE PORT

- 811 FORWARD EQUIPMENT PACK DOOR
- 812 REAR EQUIPMENT PACK DOOR
- 813 REAR DOOR

820 - LOWER FUSELAGE STARBOARD

- 821 CREW ENTRANCE DOOR
- 822 FORWARD EQUIPMENT PACK DOOR
- 823 REAR EQUIPMENT PACK DOOR

830 - UPPER FUSELAGE PORT

- 831 CREW ESCAPE HATCH

840 - UPPER FUSELAGE STARBOARD

NOT USED

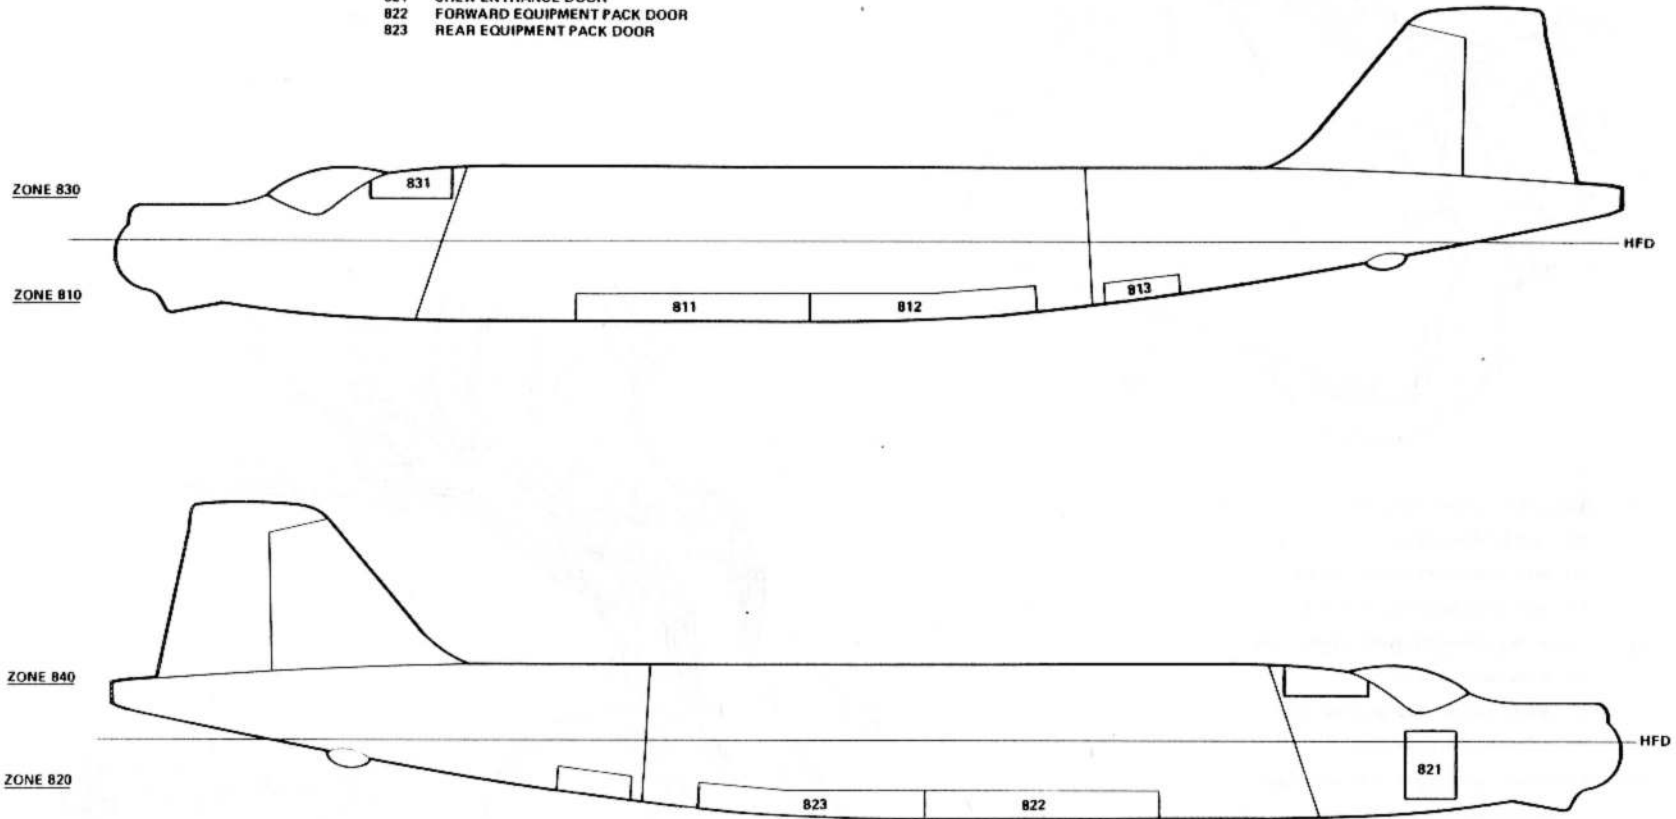


FIG. 8. MAJOR ZONES - DOORS

UK RESTRICTED

MAJOR ZONE 900 - SPECIAL FIT

910 - PORT WING TIP TANK (OR CHAFF DISPENSER)

940 - NOT USED

920 - NOT USED

950 - NOT USED

930 - NOT USED

960 - STARBOARD WING TIP TANK (OR CHAFF DISPENSER)

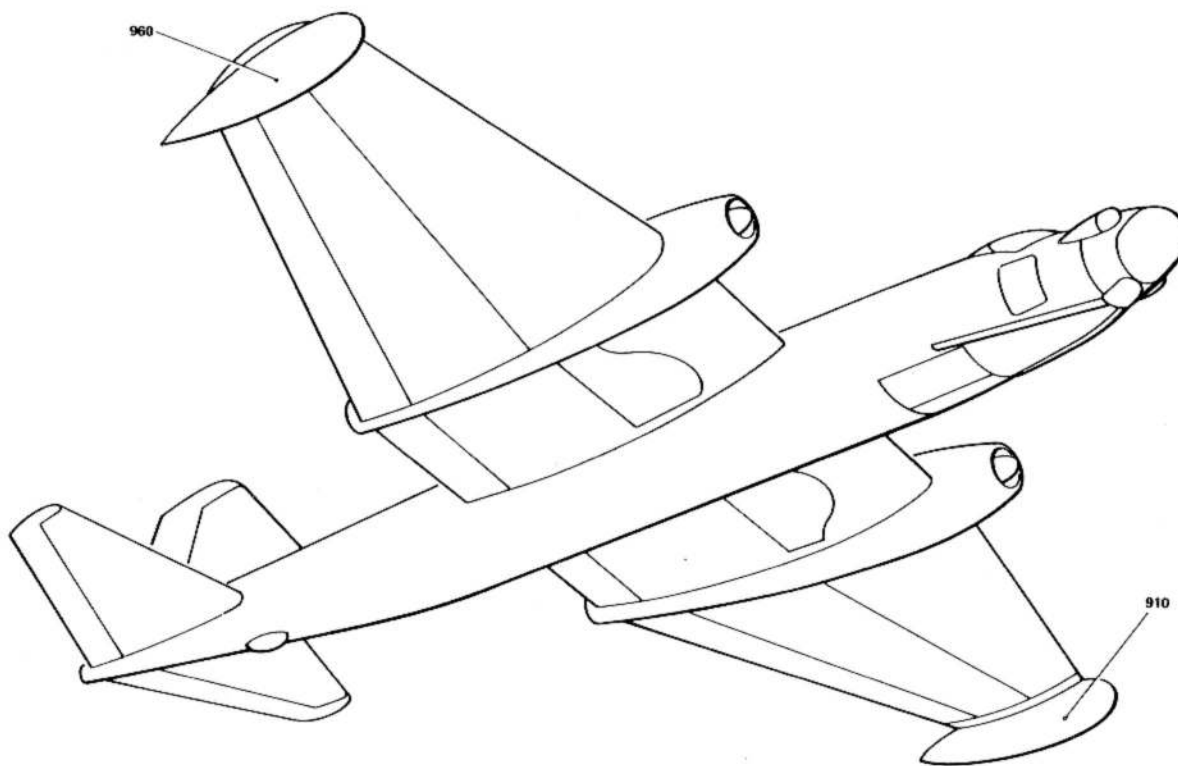


FIG. 9. MAJOR ZONES - SPECIAL FIT



ALIGHTING GEAR

MAIN UNDERCARRIAGE

Type ..... Two single-wheel units, retracting inwards,  
B.A.C., EA3.40.233, 234

Shock absorber  
Type ..... Oleo pneumatic

◀ Nitrogen pressure (with wheels off the ground) ▶  
A.U.W. Up to 33,000 lb. .... 375 lb/in<sup>2</sup>  
Above 33,000 lb. .... 450 lb/in<sup>2</sup>

(For pressures for different all-up weights  
refer to Sect.2, Chap.2)

Fluid ..... OM-15  
Capacity - fluid ..... 12 pints (approx.)

Wheels  
Type ..... Dunlop AH.9485  
Tyres ..... Dunlop KJ-N-16N or DR.4521  
Tubes ..... Dunlop K.J.9  
Tyre pressure ..... Refer to A.P.101B-0400-5A2  
Brakes ..... Dunlop hydraulic

NOSE UNDERCARRIAGE

Type ..... Twin wheel, non-steerable, castering, rearward  
retracting, Dowty, Type 2.0039.6040 (pre Mod.5505)  
or 2.0039.6041 (post Mod.5505)

Shock absorber ..... Levered suspension, liquid spring  
Dowty Type A7307Y

Pressure (with wheels off the ground) ..... 1,500 lb/in<sup>2</sup>

Fluid ..... OM-15  
Capacity - fluid ..... 1½ pints

Wheels  
Type ..... Dunlop AH.9238 or AH.9590  
Tyres ..... Dunlop K.K.E.N.14N or DR.2565  
Tubes ..... K.K.2  
Tyre pressure ..... Refer to A.P.101B-0400-5A2

HYDRAULIC SYSTEM

Pumps ..... Lockheed Mk.9 (Ref.No.37J/266)

Fluid ..... OM-15

Capacity of system ..... 31 pints approx.

Pressure settings  
Cut-out valve ..... Cut-out, 2500  $\pm$   $\frac{0}{100}$  lb/in<sup>2</sup>  
Cut-in, 2000 lb/in<sup>2</sup> (min.)

Thermal relief valves ..... Open 3450  $\pm$  100 lb/in<sup>2</sup>  
Re-seat, 3100 lb/in<sup>2</sup> (min.)

Flaps relief valve ..... Open, 2850  $\pm$  50 lb/in<sup>2</sup>

Accumulator inflation pressure  
(main and wheel brakes)  
At 40 deg F, 1300  $\pm$   $\frac{50}{0}$  lb/in<sup>2</sup>  
At 60 deg F, 1350  $\pm$   $\frac{50}{0}$  lb/in<sup>2</sup>  
At 80 deg F, 1400  $\pm$   $\frac{50}{0}$  lb/in<sup>2</sup>  
when exhausted of hydraulic pressure

Reservoir pressure relief valve ..... Open 12-17 lb/in<sup>2</sup>  
Re-seat 8 lb/in<sup>2</sup>

ELECTRICAL SYSTEM

Wiring ..... Plessey

Voltage ..... 28

Generators ..... Two 30V, 6kW, Type P3  
(Ref. No.5UA/4751)

Batteries ..... Four 12V, 40 Ah, Type C, connected  
in series parallel

Voltage regulators ..... Two Type 23 and one Type 32

Emergency batteries ..... Two 12V, 40 Ah

Turbo - alternators (two)  
Type ..... T.G.A.30 Mk.6  
Output ..... 30kVA, 200/115 volt  
Frequency ..... 400 Hz



This file was downloaded  
from the RTFM Library.

Link: [www.scottbouch.com/rtfm](http://www.scottbouch.com/rtfm)

Please see site for usage terms,  
and more aircraft documents.

