

Chapter 3**ADAPTER, 0.60 in. $\times$ 19 T.P.I. (803087) Ref. No. 6C/2581****LIST OF CONTENTS**

	<i>Para.</i>
<i>General</i>	1

LIST OF ILLUSTRATIONS


	<i>Fig.</i>
<i>Adapter, 0.60 in. $\times$ 19 T.P.I. (803087), Ref. No. 6C/2581</i>	1

General

1. This is a simple aluminium-alloy adapter which is used in conjunction with liquid oxygen package units in Transport type aircraft. Two atmospheric vent connections are provided with these liquid oxygen package units. One connection is located in the package unit base plate, the other is incorporated in the fill and vent valve assembly. This adapter is used for connecting a Flexmet hose to the vent connection in the package unit base plate.

WARNING . . .

The presence of oil or grease in contact with oxygen at high pressure is dangerous since it introduces a grave risk of explosion.

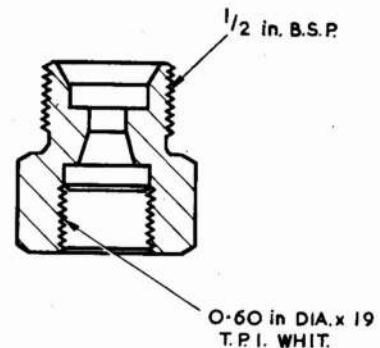

**Fig. 1. Adapter, 0.60 in. $\times$ 19 T.P.I., (803087)
Ref. No.6C/2581**

RESTRICTED

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

