

Cancelled obsolete

Chapter 8

BATTERY, TYPE B, 2-VOLT, 11 AMP. HR.

LIST OF CONTENTS

	<i>Para.</i>
<i>Introduction</i>	1
Description	2
Servicing	3

LIST OF ILLUSTRATIONS

	<i>Fig.</i>
<i>Battery, Type B, 2V, 11 amp. hr.</i>	1

LEADING PARTICULARS

Battery, Type B, 2V, 11 amp. hr.	Ref. No. 5J/1387
<i>Capacity—</i>	
<i>At 10-hour rate</i>	20 amp. hr.
<i>At 1-hour rate</i>	11 amp. hr.
<i>Overall dimensions—</i>	
<i>Length</i>	2.75 in.
<i>Width</i>	3.5 in.
<i>Height</i>	7.1 in.
<i>Weight (filled)</i>	4 lb. 8 oz.

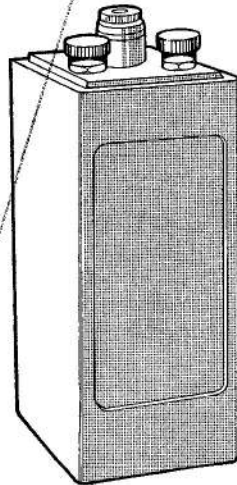


Fig. 1. Battery, Type B, 11 amp. hr.

Introduction

1. The battery, Type B, 2-volt, 11 amp. hr., is a lead-acid battery of conventional construction, as described in A.P.4343, Vol. 1, Sect. 3, Chap. 2.

DESCRIPTION

2. This battery (fig. 1) is a single cell housed in a moulded container. It is fitted with an unspillable vent (Ref. No. 5J/1664), and has insulated terminals.

SERVICING

3. General information on the servicing of this type of battery is given in A.P.4343, Vol. 1, Sect. 3, Chap. 2. Batteries are normally received in a dry-charged condition, and in all instances the manufacturer's instructions for initial filling and charging, as supplied with the battery, should be carefully followed.

RESTRICTED



This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

