


ELECTRICAL SERVICING TROLLEY, Mk. 3

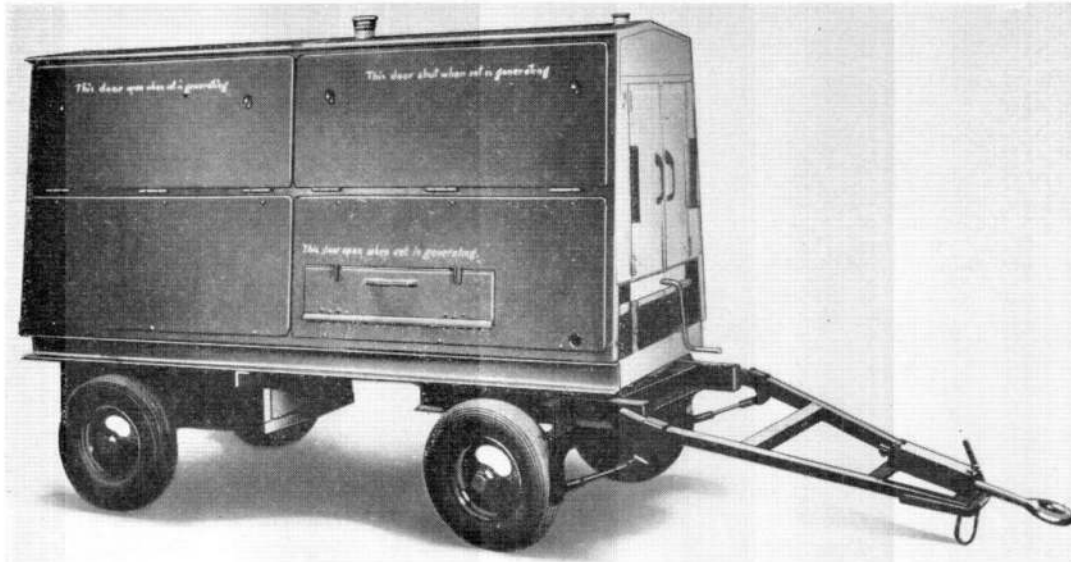

<i>Air Ministry Ref. No.</i>	4F/1799
<i>Associated publications</i>	A.P.4343S,	Vol. 1,	Sect. 23,	Chap. 7
	A.P.2306M,	Vol. 1 & 6		
<i>Output</i>	6 kW. (28 volts, 214 amperes)
<i>Dimensions</i>	Length 10 ft., Width 2 ft. 11 in. Height 4 ft. 7 in.
<i>Weight</i>	11 cwt.

BRIEF DESCRIPTION

The Mk. 3 trolley is used for general electrical servicing where a 28 volt supply is required but is not suitable for starting aero-engines. It is also used for the servicing of radio equipment and for the boost charging of batteries.

The trolley consists of a Ford 10 H.P. water-cooled engine driving a 6 kW. generator mounted together with its associated control equipment on a four-wheeled chassis which is completely cowled to protect the equipment from inclement weather. The engine can be started by hand or electrically.

RESTRICTED

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

