

SERVICES—PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Store	Plate No.
		<b>PILOT'S ANTI "G" INSTALLATION ASSEMBLY</b>	-	-		
861	D.190124	<b>Angle</b> , mounting, anti "G" valve ... ..	1	DTD.610	C.	NK.1
862	F.188884	<b>Angle</b> , mounting, anti "G" valve ... ..	1	DTD.610	C.	NK.1
863	F.190229	<b>Bolt</b> , special, connecting air bottle straps ... ..	2	S.95.B	C.	NK.1
447	F.186436	<b>Bolt</b> , special, strap clamping ... ..	2	S.95.B	C.	NK.1
27VA/3988	Dunlop	<b>Bottle</b> , air, spherical ... ..	2	-	A.	
	ACM.16782 or ACM.16780					
864	F.190220	<b>Clip</b> , mounting, reducing valve ... ..	1	S.3	C.	NK.1
865	Std.1178/3	<b>Clip</b> , mounting, reducing valve ... ..	1	S.3 & T.26	C.	4
3951	Std.840/26	<b>Clip</b> , securing pipes, $\frac{5}{16}$ " wide $\times$ 22 S.W.G. $\times$ 2-6" long (Make from 30B/1433)	2	DTD.610	MR/C	4
3746	Std.841/26	<b>Clip</b> , securing pipes ... ..	1	DTD.610	C.	4
3751	Std.842/12	<b>Clip</b> , securing pipes, $\frac{5}{16}$ " wide $\times$ 22 S.W.G. $\times$ 1-2" long (Make from 30A/1284)	1	S.3	MR/C	4
4667	Std.850/28	<b>Clip</b> , securing pipes, $\frac{5}{16}$ " wide $\times$ 22 S.W.G. $\times$ 2-8" long (Make from 30B/1433)	2	DTD.610	MR/C	4
3774	Std.1306/N/20	<b>Coupling</b> , flexible, $\frac{5}{8}$ " i/d $\times$ 2-0" long... ..	4	DTD.625A	MR/C	4
4276	Std.1306/N/38	<b>Coupling</b> , flexible, $\frac{5}{8}$ " i/d $\times$ 3-8" long... ..	2	DTD.625A	MR/C	4
1707	A.193653	<b>Elbow</b> , at cockpit shelf side wall ... ..	1	L.54 or T.9	C.	---
27VA/3443	Dunlop	<b>Filter</b> ... ..	1	-	A.	
	ACO.7273					
6A/2691	-	<b>Gauge</b> , pressure, Mk. 14.KK ... ..	1	-	A.	
2851	D.190124/1	<b>Hose</b> , kink proof, $\frac{3}{8}$ " i/d $\times$ 12 $\frac{1}{2}$ " long (Dunlop) ... ..	1	-	MR/C	
6A/2771	-	<b>Label</b> , air ... ..	1	-	C.	
3584†	A.190201/1	<b>Pipe</b> , 4-way pipe to non-return valve ... ..	1	DTD.323	MR/C	
3585†	A.190201/2	<b>Pipe</b> , non-return valve to air bottle ... ..	1	DTD.323	MR/C	-
3586†	A.190201/3	<b>Pipe</b> , air bottle to air bottle ... ..	1	DTD.323	MR/C	
3587†	A.190201/4	<b>Pipe</b> , air bottle to filter ... ..	1	DTD.323	MR/C	
1948	A.190201/5	<b>Pipe</b> , filter to tee-piece ... ..	1	DTD.323	C.	
3588†	A.190201/6	<b>Pipe</b> , tee-piece to selector valve ... ..	1	DTD.323	MR/C	
3589†	A.190201/7	<b>Pipe</b> , selector to selector valve ... ..	1	DTD.323	MR/C	-
3590†	A.190201/8	<b>Pipe</b> , tee-piece to gauge ... ..	1	DTD.323	MR/C	
3591†	A.193654/1	<b>Pipe</b> , anti "G" valve to connection ... ..	1	L.54 or T.9	MR/C	
3592†	A.193654/2	<b>Pipe</b> , connection ... ..	1	L.54 or T.9	MR/C	
3593†	A.193654/3	<b>Pipe</b> , connection to elbow ... ..	1	L.54 or T.9	MR/C	
1538	Std.1285/3/BB	<b>Connector</b> , earthing ... ..	2	-	C.	4
4134	Std.1285/4/BB	<b>Connector</b> , earthing ... ..	1	-	C.	4
3839	Std.1606/44/B16	<b>Screw</b> , securing elbow, 4 B.A. $\times$ $\frac{1}{2}$ " long ... ..	3	Brass	MR/C	5
1720	Std.1606/44/B24	<b>Screw</b> , securing pressure gauge ... ..	4	-	C.	5
866	F.189989	<b>Shackle</b> ... ..	2	DTD.166	C.	NK.1
27VA/3445	Dunlop	<b>Socket</b> , quick release ... ..	1	-	A.	
	ACO.6580					
867	F.189991	<b>Strap</b> , air bottle ... ..	4	DTD.166	C.	NK.1
868	F.190003	<b>Strap</b> , air bottle ... ..	2	DTD.166	C.	NK.1
3787	Std.1507/23/035	<b>Tube</b> , distance, $\frac{5}{16}$ " o/d $\times$ 17 S.W.G. $\times$ .35" long (Make from 30A/966)	2	T.26	MR/C	4
3808	Std.1509/23/040	<b>Tube</b> , distance, $\frac{3}{8}$ " o/d $\times$ 17 S.W.G. $\times$ .4" long (Make from 30B/557)	1	T.4	MR/C	4
3802	Std.1509/23/085	<b>Tube</b> , distance, for clip securing pipe, $\frac{3}{8}$ " o/d $\times$ 17 S.W.G. $\times$ .85" long (Make from 30B/557)	1	T.4	MR/C	4


† For details see Piping Chart

SERVICES—PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
869	F.140778	Union, reducing	...	...	...	...	1	L.1	C.	
27VB/3254	Hymatic AC.2	Valve, anti "G"	...	...	...	...	1	—	A.	
27Q/1539	Dowty D.5213Y	Valve, non-return (Mod. 447)	...	...	...	...	1	—	A.	
27VC/27	Palmer C.58	Valve, reducing	...	...	...	...	1	—	A.	
27VB/3441	Hymatic SV.9	Valve, selector	...	...	...	...	1	—	A.	
870	Std.915/B/18	Washer	...	...	...	...	3	DTD.610	C.	4

SERVICES—PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
<b>SUMMARY OF STOCK ITEMS</b>										
28D/12624	A25.7B	<b>Bolt, 4 B.A.</b>	...	...	...	...	...	—	—	—
28D/12534	A25.9C	<b>Bolt, 2 B.A.</b>	...	...	...	...	...	—	—	—
28F/9501	AGS.1142/B	<b>Nipple</b>	...	...	...	...	...	—	—	—
28M/5316	A27.CP	<b>Nut, 2 B.A.</b>	...	...	...	...	...	—	—	—
28M/10215	AGS.2008/B1	<b>Nut, 4 B.A.</b>	...	...	...	...	...	—	—	—
28M/802	AGS.113/C	<b>Nut, wing</b>	...	...	...	...	...	—	—	—
28F/10020	AGS.1120/1	<b>Piece, tee</b>	...	...	...	...	...	—	—	—
28P/825	SP.4.Y.A15	<b>Pin</b>	...	...	...	...	...	—	—	—
28P/12587	SP.9.C4	<b>Pin, split</b>	...	...	...	...	...	—	—	—
28S/14005	A32.B14	<b>Screw</b>	...	...	...	...	...	—	—	—
28S/13742	A32.C14	<b>Screw</b>	...	...	...	...	...	—	—	—
28W/12355	SP.16.C	<b>Washer, 2 B.A.</b>	...	...	...	...	...	—	—	—

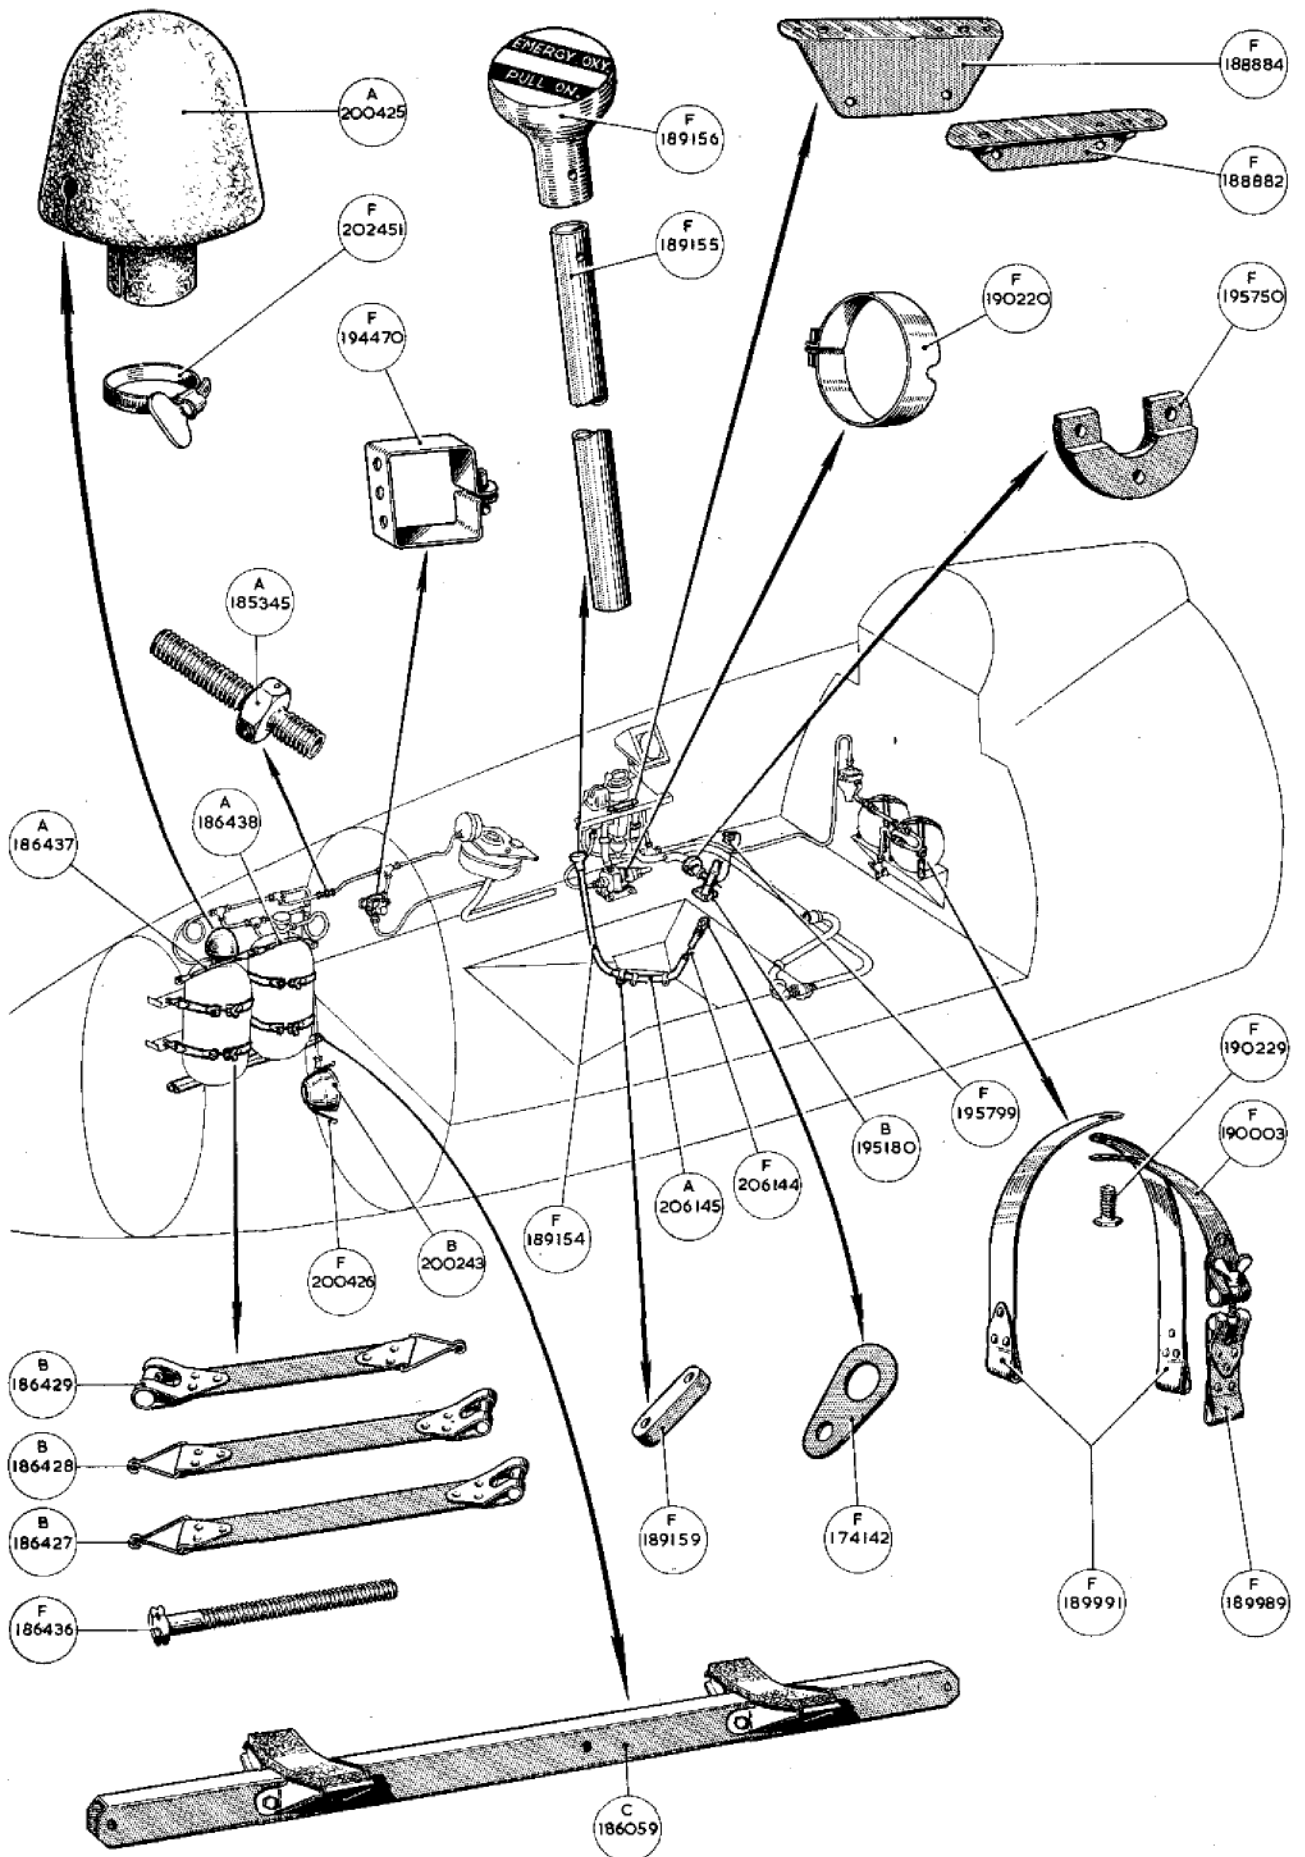

This file was downloaded  
from the RTFM Library.

Link: [www.scottbouch.com/rtfm](http://www.scottbouch.com/rtfm)

Please see site for usage terms,  
and more aircraft documents.

