

CHAPTER 10

OXYGEN SYSTEM

LIST OF CONTENTS

	<u>Para.</u>		<u>Para.</u>
Introduction	1	Emergency supply	9
DESCRIPTION		SERVICING	
General	2	General	10
Oxygen cylinders	3		
Pressure reducing valve	4	REMOVAL AND ASSEMBLY	
Demand regulator	5		
Charging valve	6	General	11
Pressure gauge	7	Oxygen cylinders	12
Operation	8		

ILLUSTRATION

	<u>Fig.</u>
Oxygen installation and diagram	1

Introduction

1. This chapter contains a brief description of the oxygen system installed in this aircraft, together with the necessary servicing information for its maintenance. An illustration of the system is also

included. For a detailed description of the components used, reference should be made to A.P.1275A, Vol.1.

DESCRIPTION

General

2. The oxygen system of this aircraft consists of a pressure demand type installation and an emergency supply. The demand supply is obtained from two high-pressure cylinders and is fed to the pilot's oxygen mask via a pressure reducing valve and a demand regulator. The cylinders are provided with an in-situ charging valve, and a pressure gauge is fitted to indicate the contents of the cylinders. The emergency supply is obtained from a Mk.4A emergency oxygen set carried in the pilot's dinghy pack.

Oxygen cylinders

3. The two 750 litre Mk.5D oxygen cylinders are clamped by wing nut tensioned straps to supports in the front fuselage structure between frames 4 and 6 on the starboard side. They are mounted vertically with their valves uppermost and rest on a support tube at the bottom. A retaining cable, which is tensioned by a turnbuckle, is passed over the top of the cylinders to prevent them moving from the support tube. The valve at the top of each cylinder is fitted with a protective cover to ensure that it is kept free from oil and grease.

Pressure reducing valve

4. The Mk.1 pressure reducing valve, which lowers the oxygen pressure to the required value is mounted in a clip bolted to the aft face of frame 7 on the starboard side.

Demand regulator

5. The Mk.17B or 17 demand regulator is located at the forward end of the cabin starboard shelf and is

used to control the installation. The controls consist of an ON/OFF valve, an air cut-off lever and an emergency toggle switch, together with a combined flow and blinker indicator. The operation of the regulator is fully automatic and once turned on, supplies oxygen in accordance with the pilot's demand in direct relationship to his breathing rate and strength at all times from sea level to 50,000 ft.

Charging valve

6. The Mk.8*^{or MK10.} charging valve, which is fitted with a protective cover to ensure that it is kept free from oil and grease, is mounted on the forward face of frame 6 just below the oxygen cylinders. Access to the valve may be gained via the nose wheel aperture and the method of use is described in A.P.1275A, Vol.1, Section 8, Chapter 3.

Pressure gauge

7. The Mk.3 oxygen pressure gauge is located at the bottom of the starboard side instrument panel just above the regulator. It is provided to indicate the contents of the oxygen cylinders.

Operation

8. Oxygen leaves the cylinders at high pressure and passes through non-return valves and a filter in the pipe-lines to the pressure gauge and pressure reducing valve. Leaving the reducing valve at the required pressure, the oxygen flows to the demand regulator where the correct amount of air, depending on the aircraft's height, is added and this air/oxygen mixture is fed through a pipe which terminates in a quick-release connection attached to the cabin floor at the starboard side of the seat. From this connection a flexible pipe, clipped to the side of the seat and the pilot's safety harness, is plugged into the pilot's mask assembly via a further quick-release

RESTRICTED

connection. The lower of the quick-release connections is automatically disconnected when the seat is ejected and the upper one, when the pilot leaves the seat after ejection.

Emergency supply

9. The emergency oxygen equipment for use in the event of failure of the main supply or during ejection is installed in the pilot's dinghy pack. It consists of a Mk.4A installation using a small 55 litre cylinder, which is automatically brought into use by a static-line when pilot ejection action is taken, or by pulling a knob on the side of the starboard shelf, when the main oxygen supply fails during flight.

SERVICING

General

10. The servicing necessary to maintain the system in an efficient condition, consists of keeping the installation free from oil and grease, checking that the cylinders are fully charged and that their valves are in the fully open position. The method of charging the cylinders is given in A.P.1275A, Vol.1, Section 8, Chapter 3. Access to valves can only be obtained after removal of the protective covers. An examination of the system should also be made for signs of damage and to ensure that the components are securely mounted. The quick-release connections and the emergency oxygen cylinder static-line should be checked to ensure that they are correctly assembled. When the ejection seat is removed or when the pilot's demand tube is disconnected from the aircraft's quick-release connection, a plug, fastened by balloon cord, must be inserted into this connection to prevent the entry of foreign matter.

The only other servicing necessary is the standard serviceability and operational tests of the components, which will be found in A.P.1275A, Vol.1.

WARNING

No oil or grease must come into contact with the oxygen cylinders or any part of the system and it is therefore important to ensure that the protective covers provided for the cylinder valves and charging valve are replaced after servicing.

REMOVAL AND ASSEMBLY

General

11. The procedure for removing the reducing valve, regulator, pressure gauge and charging valve is obvious, but care must be taken to ensure that the valves on the oxygen cylinders are turned to the fully off position before any pipes are disconnected. The method of changing the oxygen cylinders is given in the following paragraph.

Oxygen cylinders

12. Access to the oxygen cylinders is obtained from within the nose wheel bay. The procedure for changing the cylinders is as follows:-

- (1) Remove the protective cover from each cylinder valve.
- (2) Turn the valve on each cylinder to the fully OFF position.
- (3) Unscrew the pipe coupling at the neck of each cylinder and gently ease the pipes away until they are clear of the cylinders.

(4) Slacken off the wing nuts on the straps around each cylinder and disengage the straps. Slacken off the retainer cable at the top of the cylinders sufficiently to free the cylinders.

(5) Remove the cylinders.

(6) Place two fully charged cylinders in position and reverse operations for removal. After re-fitting the pipe couplings, turn the valves on the cylinders to the fully open position and replace the protective covers.

NOTE: PROTECTIVE COVERS, OVER VALVES A, B & C ARE OMITTED FOR CLARITY

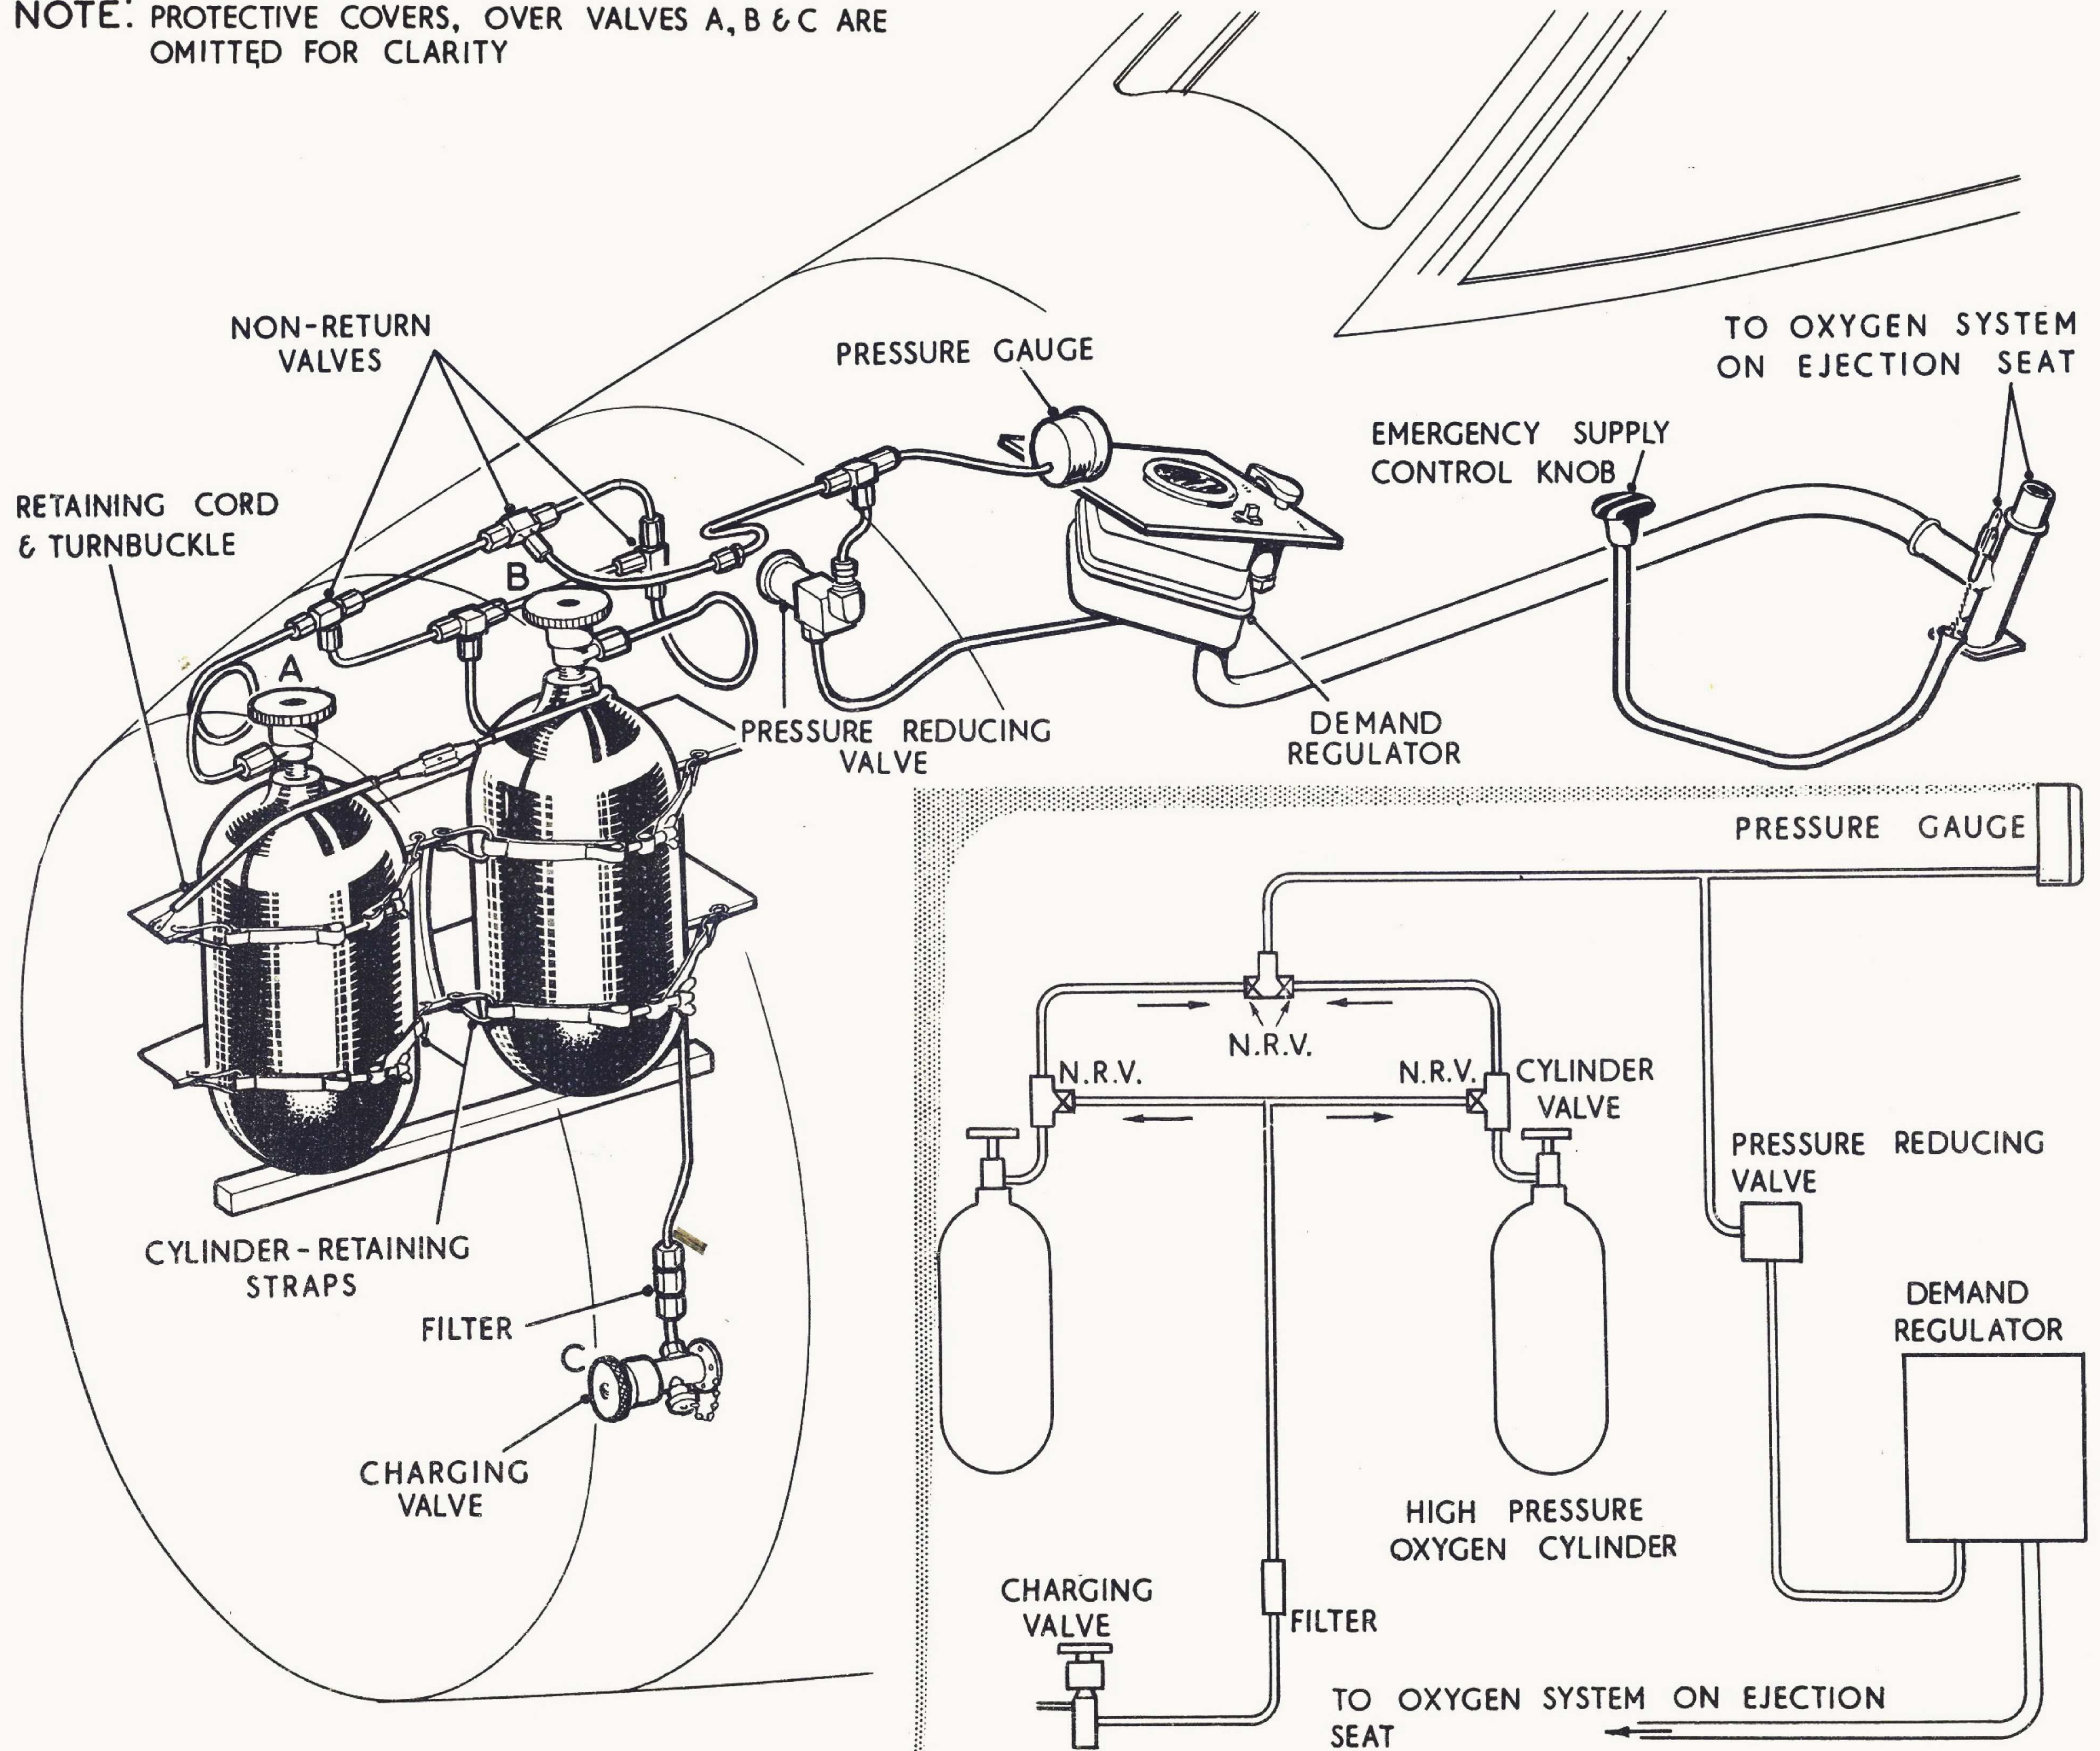


FIG. 1 OXYGEN INSTALLATION AND DIAGRAM

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

