


POWER INSTALLATION
FAIRING, REAR CONE, DETACHABLE

Ref. No.	Part No.	Description	No. off	Material Specification	Class of Store or L.M	Plate No.
59	S10-20 EC 22	FAIRING REAR CONE, DETACHABLE (Special spares assembly) (Mod. 295)	1	—	P	MG1
	10-20 EC 14027A	FAIRING , rear cone, detachable, assembly (Mod. 1163)	1	—	—	MG1
26DL/3381	10 WC 2527	Spares for :— BOLT , 'U'	8	—	C	MG1
28M/12928	A27/EP	Attachments for 10 WC 2527, Bolt :—				
28W/9418920	SP.10/E	Nut, 1" BSF	2	—	C	
		Washer	2	—	C	
17222	10-20 EC 14025A	CONE , tail, assembly (Mod. 1163)	1	—	P	MG1
	10-20 EC 9157	DIAPHRAGM , at station 429"	1	L.72	—	MG1
	10-20 EC 10037A	DIAPHRAGM , front, assembly (Mod. 830)	1	—	—	MG1
		Spares for :—				
	10-20 EC 9200ND	ANGLE , attachment, L.H. (For spares use 10-20 EC 9776ND)	1	—	—	MG1
14319	10-20 EC 9776ND	ANGLE , attachment, L.H. (Spares condition)	1	—	C	
	10-20 EC 9199ND	ANGLE , attachment, R.H. (For spares use 10-20 EC 9775ND)	1	—	—	MG1
14318	10-20 EC 9775ND	ANGLE , attachment, R.H. (Spares condition)	1	—	C	
28M/11957	AGS.2007/C/1	NUT , anchor, 2 BA	2	—	C	
28M/12421	AGS.2018/C/1	NUT , anchor, 2 BA	4	—	C	
	10-20 EC 8279ND	TAPE , bedding, ".05 x 1/8" tFick (Make from standard section J29/69, supplied by Bells Asbestos & Eng. Co.)	1	—	LM	MG1
	10-20 EC 9165A	DIAPHRAGM , intermediate rear, at station 418", assembly	1	—	—	MG1
		Spares for :—				
	10-20 EC 9203ND	ANGLE , attachment, L.H. (For spares use 10-20 EC 9773ND)	1	—	—	MG1
14316	10-20 EC 9773ND	ANGLE , attachment, L.H. (Spares condition)	1	—	C	
	10-20 EC 9204ND	ANGLE , attachment, R.H. (For spares use 10-20 EC 9774ND)	1	—	—	MG1
14317	10-20 EC 9774ND	ANGLE , attachment, R.H. (Spares condition)	1	—	C	
28M/11957	AGS.2007/C/1	NUT , anchor, 2 BA	10	—	C	
28M/12421	AGS.2018/C/1	NUT , anchor, 2 BA	2	—	C	
	10-20 EC 9183A/1	DIAPHRAGM , intermediate, front, at station 407"-65, assembly	1	—	—	MG1
		Spares for :—				
	10-20 EC 9519ND	ANGLE , attachment, L.H., 20 SWG	1	L.72	LM	MG1
	10-20 EC 9520ND	ANGLE , attachment, R.H., 20 SWG	1	L.72	LM	MG1
	10-20 EC 9227ND	ANGLE , attachment, L.H. (For spares use 10-20 EC 9777ND)	1	—	—	MG1
14320	10-20 EC 9777ND	ANGLE , attachment, L.H. (Spares condition...)	1	—	C	
	10-20 EC 9228ND	ANGLE , attachment, R.H. (For spares use 10-20 EC 9778ND)	1	—	—	MG1
14321	10-20 EC 9778ND	ANGLE , attachment, R.H. (Spares condition...)	1	—	C	
28M/11957	AGS.2007/C/1	NUT , anchor, 2 BA	2	—	C	
28M/12421	AGS.2018/C/1	NUT , anchor, 2 BA	4	—	C	
15056	10-20 EC 9861	EYE-BOLT , st station 429", for hold-back strop (Mod. 746)	1	—	C	MG1

**POWER INSTALLATION
FAIRING, REAR CONE, DETACHABLE**

Ref. No.	Part No.	Description						No. off	Material Specification	Class of Score or L.M.	Plate No.
		1	2	3	4	5	6				
	10-20 EC 8195							1	—	—	MG1
	10-20 EC 8196							1	—	—	MG1
	10-20 EC 9161							1	L.72	—	MG1
14493	10-20 EC 9787ND							1	—	C	
	10-20 EC 9162							1	L.72	—	MG1
14494	10-20 EC 9788ND							1	—	C	
	10-20 EC 8187							16	L.72	LM	MG1
	10-20 EC 8209ND							2	L.72	LM	MG1
	10-20 EC 9187							1	L.72	—	MG1
14322	10-20 EC 9779ND							1	—	C	
	10-20 EC 9189A							1	—	—	MG1
14491	10-20 EC 9785ND							1	—	C	
	10-20 EC 9190A							1	—	—	MG1
14492	10-20 EC 9786ND							1	—	C	
	10-20 EC 8181ND							1	L.72	—	MG1
12427	10-20 EC 9481ND							1	—	C	
	10-20 EC 8182ND							1	L.72	—	MG1
12428	10-20 EC 9482ND							1	—	C	
	10-20 EC 9185							1	L.72	—	MG1
14324	10-20 EC 9783ND							1	—	C	
	10-20 EC 8179ND							1	L.72	—	MG1
12429	10-20 EC 9479ND							1	—	C	
	10-20 EC 8180ND							1	L.72	—	MG1
12430	10-20 EC 9480ND							1	—	C	
	10-20 EC 9163A							1	—	—	MG1
14323	10-20 EC 9781A/ND							1	—	P	
28D/1007982	AS.1248/1C							54	—	C	
26DL/4216	DHS.69/C							1	—	C	MG1

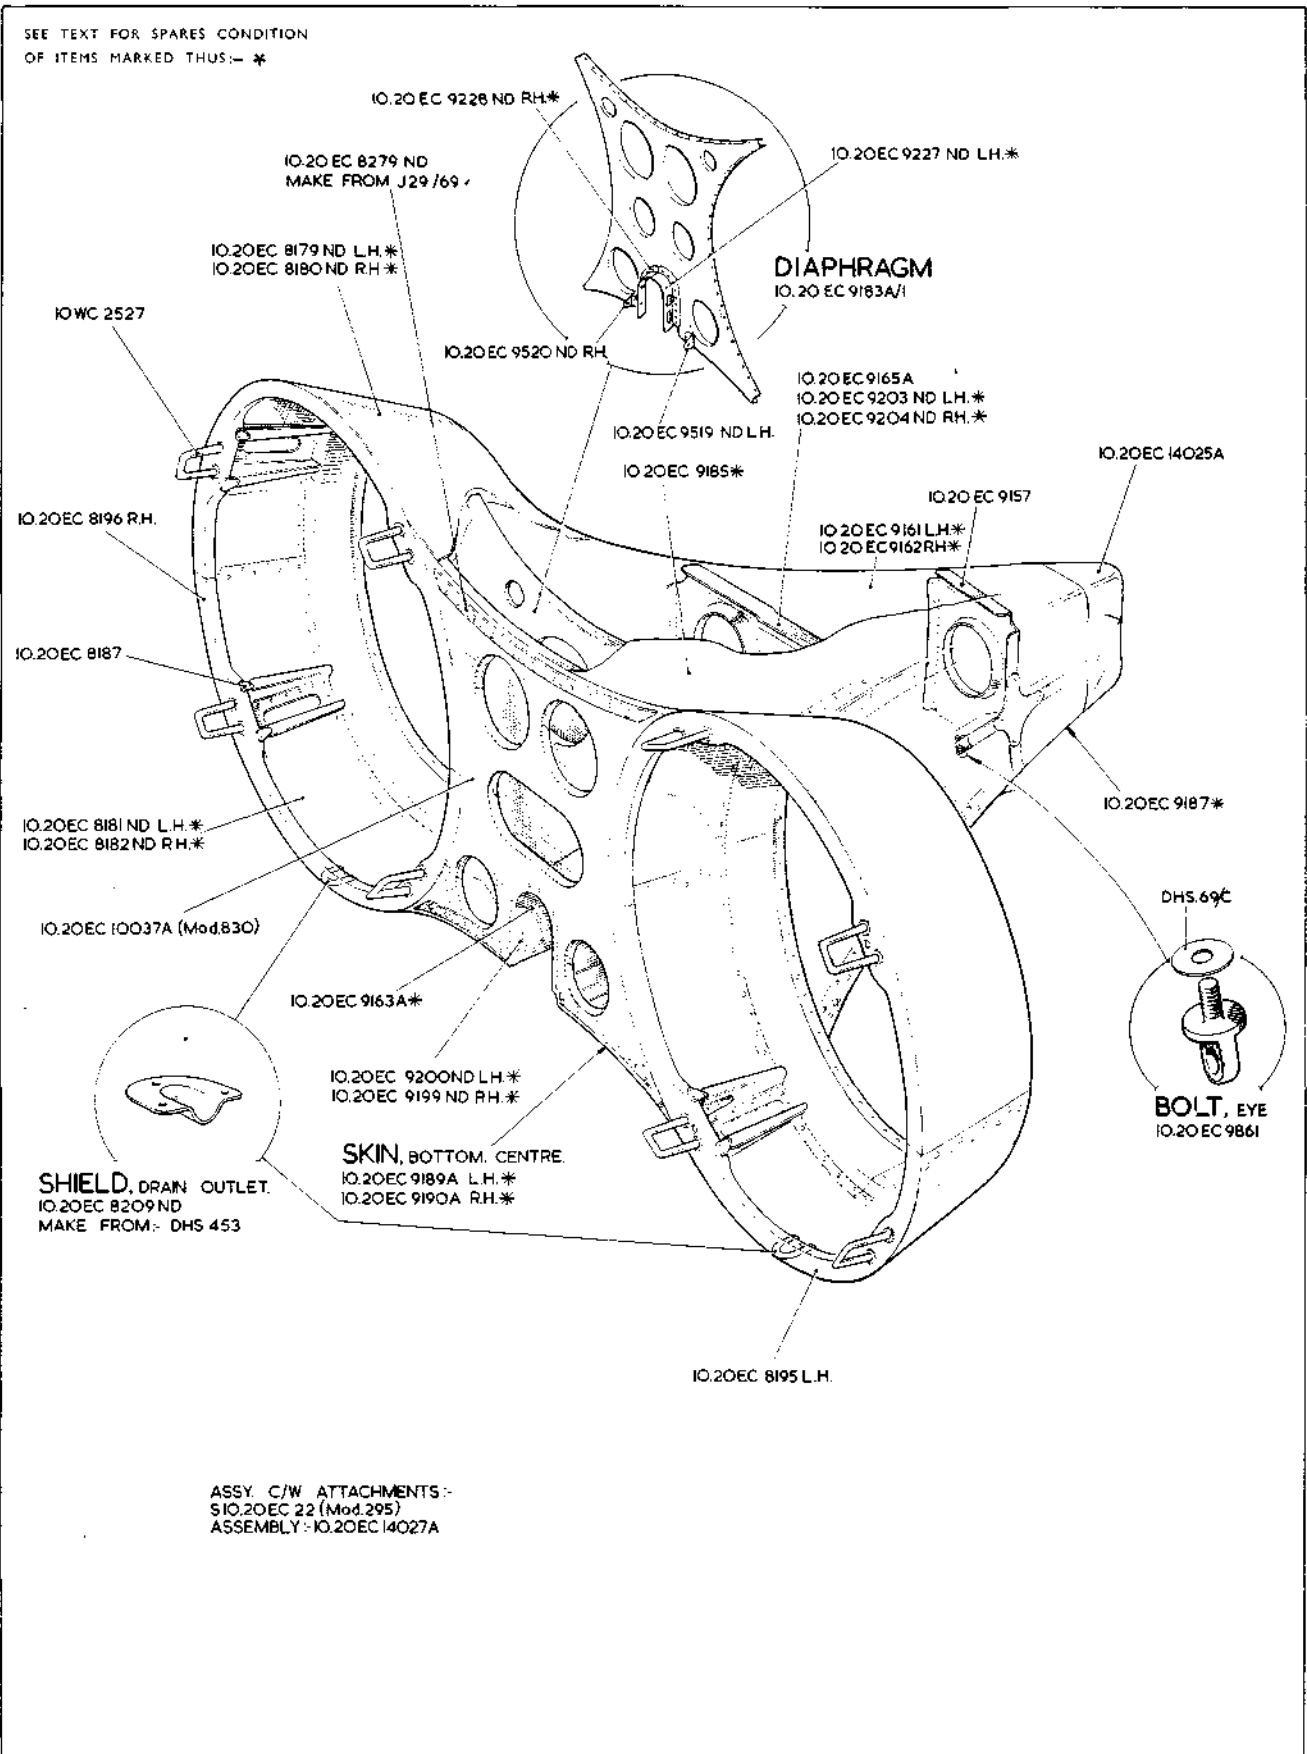

MG.1

POWER INSTALLATION

MG.1

FAIRING, REAR CONE, DETACHABLE

[AL.63]