


AIR BLOWER, PORTABLE, TYPE D

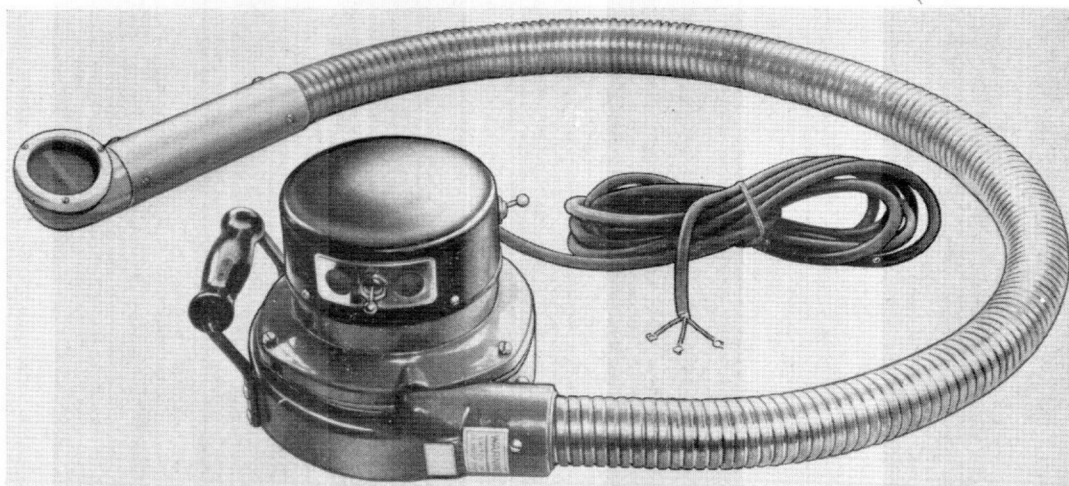

Air Ministry Ref. No. ... 5A/4124

Admiralty Pattern No.

Associated publication A.P.4343S, Vol. 1, Sect. 23, Chap. 13

BRIEF DESCRIPTION

The portable air blower is operated from 240–250 a.c. or d.c. supplies and produces a flow of hot or cold air for cooling purposes or for drying out damp components. Its weight is 14 lb. The blower consists of a motor of approximately $\frac{1}{2}$ horse-power driving a centrifugal fan within a light alloy casing. Air from the fan is delivered through a 4 ft. $\times$ 1 $\frac{1}{2}$ in. length of flexible copper tubing terminating in a heater unit and a nozzle outler. The heater unit consumes 1 kW. and is controlled by a toggle switch, marked HOT/COLD on the motor cover. The blower is provided with a length of cable and a 3-pole, 5A. plug for connection to the socket outlet of a mains supply.

RESTRICTED

