

FUSELAGE—HOOD WINDING GEAR

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Store	Plate No.
		1 2 3 4 5				
	D.187117	HOOD WINDING GEAR, ASSEMBLY	—	—		
	D.186215	ACTUATOR AND CROSS SHAFT, ASSEMBLY	—	—		
5W/309	B.186227	Actuator, group	1	—	A.	
560	Rotax C.5209/1	Actuator, rotary	1	—	B.	JF.1
2A/	B.186228	Housing, group	1	—	B.	
561	Torrington B.1012	Bearing, needle roller	1	—	C.	JF.1
	F.186230	Bush	2	BSS.369		
562	A.186231	Sprocket	1	S.95.B	C.	JF.1
563	F.186232	Washer, sprocket retaining	1	S.3	C.	JF.1
5256	F.202895	Bolt, for cross shaft pinion housing	4	S.95.B	C.	JF.1
27KB/161	AS.924/48P	Chain	1	—	C.	
567	F.169576	Eye-end, tension rod	2	S.1	C.	JF.1
568	F.186217	Eye-end, tension rod	2	S.1	C.	JF.1
569	A.186224	Housing, cross shaft pinion, group	2	—	C.	JF.1
570	F.186225	Bearing	1	BSS.369	C.	JF.1
571	F.186226	Bearing	1	BSS.369	C.	JF.1
573	F.186219	Pinion, cross shaft	2	S.95.B	C.	JF.1
1503	F.189478	Rod, tension, for actuator	2	S.95.B	C.	JF.1
575	F.186218	Shim, cross shaft housing	QR	L.2	C.	JF.1
5252	B.202856	Shaft, cross, group	1	—	B.	JF.1
564	F.188564	Block, bearing	1	Stamping	C.	JF.1
4001	Std.1292/9C	Bolt, attaching plug end	2	S.2	MR/C	4
565	Std.1292/8C	Bolt, attaching plug end	2	S.2	C.	4
1564	Std.1292/10C	Bolt, attaching sprocket	2	S.2	C.	4
5254	Dowty	Seal, "O"	2	—	C.	JF.1
	GD.1309/6					
5255	Dowty	Seal, "O"	2	—	C.	JF.1
	GD.1309/9					
577	F.186865	Sprocket	1	S.95.B	C.	JF.1
3808	Std.1509/23/040	Tube, distance, $\frac{1}{8}$ " o/d x 17 S.W.G. x 0.40" long	1	T.4	MR/C	4
2192	Std.915/C/14	Washer, 2 B.A.	2	DTD.610	C.	4
4117	Std.1283/G	Washer, shim	3	Laminum	C.	4
578	Std.1547/50/12	Washer, profile	2	DTD.610	C.	4
6203	A.211787	Box, control, group (Mod. 376)	1	—	B.	JF.1
6204	A.211786	Box, actuator control, group (Mod. 376)	1	—	B.	JF.1
	A.211785	Gate, group (Mod. 376)	1	—		
6206	F.211257	Piece, distance	2	L.65.C	C.	JF.1
6205	F.211244	Spring, leaf	1	DTD.166	C.	JF.1
555	F.188527	Knob, lever	1	BSS.771	C.	JF.1
554	A.188524	Lever	1	S.3	C.	JF.1
559	A.188987	Cable, control box to bell crank lever, group	1	—	B.	JF.1
		Consisting of:—				
	Std.1920	Adjuster, complete with sleeve and nut	1	—		5
28X/5870	—	Cable, 5 cwt.	QR	W.11	C.	
29H/	Bowden T.3	Conduit	QR	—	C.	
28U/16264	SP.37.A	Eye-end	1	—	C.	
28U/15288	SP.38.A	Fork-end	1	—	C.	

RESTRICTED

Page JF.2

Hunter F. Mk. 4
Issued with Amendment List No. 18


FUSELAGE—HOOD WINDING GEAR

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
5K/2911	SP.40.B.14					Grommet	2	—	C.	
	F.178859					Plug	1	DTD.364		
29H/1902	Bowden PN.999					Stop	1	—	C.	
585	A.188529					Switch, hood actuator, group	1	—	A.	JF.1
2374	B.191749					Cable, F.40, group (See Cable Chart)	1	—	MR/B	JF.1
586	F.188532					Lever	1	S.80	C.	JF.1
587	F.188531					Lever	1	S.80	C.	JF.1
588	F.188533					Link	1	S.3	C.	JF.1
589	Mills					Pin, grooved, GP.5, $\frac{1}{16}$ " dia. x $\frac{3}{8}$ " long	2	M.S.	C.	JF.1
5F/	Hellerman					Sleeve, P.V.C., -6" long	1	1738	C.	
	P.9 Grey							Type B		
590	F.188534					Spring	1	Spt. St.	C.	JF.1
5CW/5828	—					Switch	1	—	B.	
5CW/4331	—					Transfer, "Open"	1	—	C.	
5CW/4332	—					Transfer, "Shut"	1	—	C.	
	Std.1509/12/052					Tube, distance, $\frac{1}{4}$ " o/d x 20 S.W.G. x .52" long (Make from 30B/554)	4	T.4		
556	A.188986					Cable, bell crank lever to actuator, group	1	—	B.	JF.1
						Consisting of:—				
	Std.1920					Adjuster, complete with sleeve and nut	2	—		5
28X/5870	—					Cable, 5 cwt.	QR	W.11	C.	
29H/	Bowden T.3					Conduit	QR	—	C.	
28N/9943	SP.38.A					Fork-end	1	—	C.	
557	F.171912					Nipple	1	BSS.250	C.	
28L/12931	A27.ET					Nut, $\frac{1}{4}$ " B.S.F.	1	—	C.	
	F.172899					Pin, taper	1	M.S.		
	F.189131					Plate, stop	1	DTD.610		
1563	F.191834					Spring	1	Sp. St.	C.	JF.1
	F.190950					Stop	1	DTD.364		
	F.214243					Cover, pulley at frame 14	1	—		
	F.214244					Cover, pulley at frame 14	1	—		
579	F.188317					Lever, front limit switch	1	S.80	C.	JF.1
580	F.188316					Plunger, front limit switch	1	S.1	C.	JF.1
6207	F.210854					Plunger, rear limit switch, group (Mod.377)	1	—	C.	JF.1
	F.187272					Plunger	1	S.80.B		JF.1
	F.187273					Spring	1	Sp. St.		JF.1
582	F.182857					Ring, "D", cable locking at actuator	1	Spt. St.	C.	JF.1
583	F.188318					Screw, front limit switch	1	S.95.B	C.	JF.1
584	F.188319					Spring, torsion, front limit switch	1	Spt. St.	C.	JF.1
3784	Std.1507/4/036					Tube, distance, $\frac{3}{8}$ " o/d x 22 S.W.G. x .36" long (Make from 30A/974)	1	T.25	MR/C	4

RESTRICTED

FUSELAGE—HOOD WINDING GEAR

Ref. No.	Part No.	Description										No. Off	Material Specification	M.R. Class of Score	Plate No.
		1	2	3	4	5									
		SUMMARY OF STOCK ITEMS													
28D/12528	A25.1B	Bolt, 4	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28D/11540	AS.1246/2B	Bolt, 4	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28D/12948	AS.1246/3B	Bolt, 4	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28D/12137	AS.1246/4B	Bolt, 4	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28D/8311	AS.1242/7C	Bolt, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28D/12531	A25.3C	Bolt, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28D/12533	A25.5C	Bolt, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28D/12566	A25.6C	Bolt, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28D/12514	A25.7C	Bolt, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28D/8300	AS.1242.1B	Bolt, 4	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28D/8509	AS.1242/13C	Bolt, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28D/12520	A25.4E	Bolt, 1/4"	B.S.F.	...	...	...	...	...	...	...	...	—	—	—	
28D/12633	A25.7E	Bolt, 1/4"	B.S.F.	...	...	...	...	...	...	...	...	—	—	—	
28N/13091	AGS.2031/6	Circlip	...	...	...	...	...	...	...	...	...	—	—	—	
28M/13288	A27.AP	Nut, 6	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28M/12929	A27.CP	Nut, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28L/13124	A27.CT	Nut, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28L/12931	A17.ET	Nut, 1/4"	B.S.F.	...	...	...	...	...	...	...	...	—	—	—	
28L/13454	A27.ETL	Nut, 1/4"	B.S.F.	...	...	...	...	...	...	...	...	—	—	—	
28M/13935	A58.ES	Nut, 1/4"	B.S.F.	...	...	...	...	...	...	...	...	—	—	—	
28M/10287	AGS.2001/B1	Nut, 4	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28M/10288	AGS.2001/C1	Nut, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28M/10327	AGS.2002.B1	Nut, 4	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28M/10290	AGS.2001/E1	Nut, 1/4"	B.S.F.	...	...	...	...	...	...	...	...	—	—	—	
28M/10330	AGS.2002/E1	Nut, 1/4"	B.S.F.	...	...	...	...	...	...	...	...	—	—	—	
28P/12587	SP9.C4	Pin, split	...	...	...	...	...	...	...	...	...	—	—	—	
28P/12431	SP9.C6	Pin, split	...	...	...	...	...	...	...	...	...	—	—	—	
28P/812	SP4.Y.A2	Pin	...	...	...	...	...	...	...	...	...	—	—	—	
28R/13502	AS.111	Pulley	...	...	...	...	...	...	...	...	...	—	—	—	
28S/2828	A33.A24	Screw, 6	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28S/2761	A31.B.12	Screw, 4	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28S/1857	A32.B.12	Screw, 4	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28W/9419401	SP.10B	Washer, 4	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28W/9419454	SP.10.C	Washer, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28W/9419474	SP.15.B	Washer, 4	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28W/9419475	SP.15.C	Washer, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28W/9419405	SP.15.E	Washer, 1/4"	dia.	...	...	...	...	...	...	...	...	—	—	—	
28W/9419476	SP.15.G	Washer, 1/8"	dia.	...	...	...	...	...	...	...	...	—	—	—	
28W/9419404	SP.16.C	Washer, 2	B.A.	...	...	...	...	...	...	...	...	—	—	—	
28W/9419487	SP.16E	Washer, 1/4"	dia.	...	...	...	...	...	...	...	...	—	—	—	

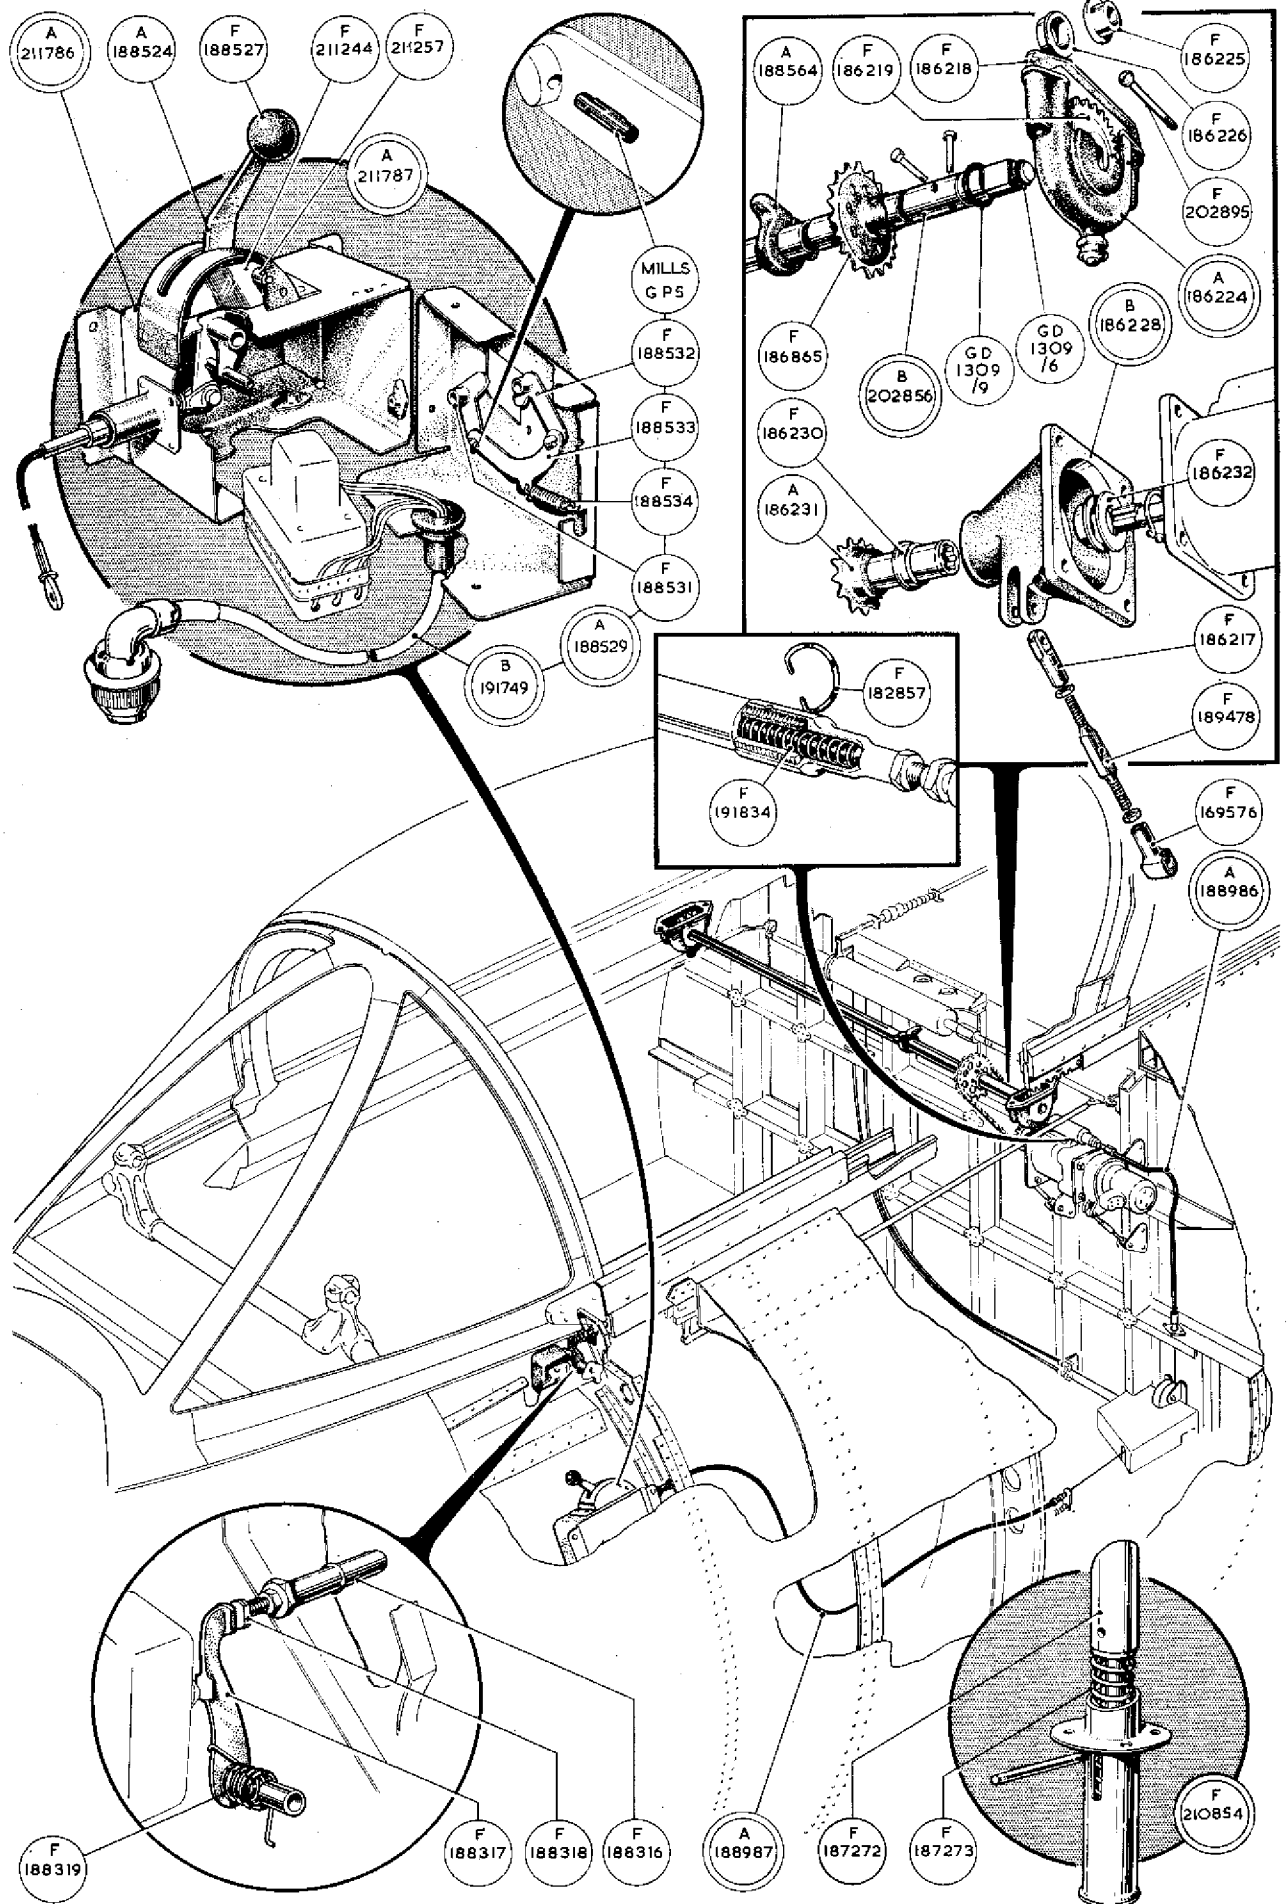

This file was downloaded
from the RTFM Library.
Link: www.scottbouch.com/rtfm
Please see site for usage terms,
and more aircraft documents.

