

SERVICES—PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description	No. Off	Material Specification	M.R. Class of Store	Plate No.
		1 2 3 4 5				
	D.190124	PILOT'S ANTI "G" INSTALLATION ASSEMBLY	—	—		
861	F.188884	Angle, mounting, anti "G" valve	1	DTD.610	C.	NK.1
862	F.188882	Angle, mounting, anti "G" valve	1	DTD.610	C.	NK.1
863	F.190229	Bolt, special, connecting air bottle straps	2	S.95.B	C.	NK.1
447	F.186436	Bolt, special, strap clamping	2	S.95.B	C.	NK.1
27VA/3988	Dunlop	Bottle, air, spherical	2	—	A.	
	ACM.16782 or ACM.16780					
864	F.190220	Clip, mounting, reducing valve	1	S.3	C.	NK.1
865	Std.1178/3	Clip, mounting, reducing valve	1	S.3 & T.26	C.	4
3951	Std.840/26	Clip, securing pipes, $\frac{7}{16}$ " wide $\times$ 22 S.W.G. $\times$ 2-6" long (Make from 30B/1433)	2	DTD.610	MR/C	4
3746	Std.841/26	Clip, securing pipes	1	DTD.610	C.	4
3751	Std.842/12	Clip, securing pipes, $\frac{7}{16}$ " wide $\times$ 22 S.W.G. $\times$ 1-2" long (Make from 30A/1284)	1	S.3	MR/C	4
4667	Std.850/28	Clip, securing pipes, $\frac{7}{16}$ " wide $\times$ 22 S.W.G. $\times$ 2-8" long (Make from 30B/1433)	2	DTD.610	MR/C	4
3774	Std.1306/N/20	Coupling, flexible, $\frac{5}{8}$ " i/d $\times$ 2-0" long... ..	4	DTD.625A	MR/C	4
4276	Std.1306/N/38	Coupling, flexible, $\frac{5}{8}$ " i/d $\times$ 3-8" long... ..	2	DTD.625A	MR/C	4
1707	A.193653	Elbow, at cockpit shelf side wall	1	L.54 or T.9	C.	—
27VA/3443	Dunlop	Filter	1	—	A.	
	ACO.7273					
6A/2691	—	Gauge, pressure, Mk. 14.KK	1	—	A.	
2851	D.190124/1	Hose, kink proof, $\frac{3}{8}$ " i/d $\times$ 12 $\frac{1}{2}$ " long (Dunlop)	1	—	MR/C	
6A/2771	—	Label, air	1	—	C.	
3584†	A.190201/1	Pipe, 4-way piece to non-return valve	1	DTD.323	MR/C	
3585†	A.190201/2	Pipe, non-return valve to air bottle	1	DTD.323	MR/C	—
3586†	A.190201/3	Pipe, air bottle to air bottle	1	DTD.323	MR/C	
3587†	A.190201/4	Pipe, air bottle to filter	1	DTD.323	MR/C	
1948	A.190201/5	Pipe, filter to tee-piece	1	DTD.323	C.	
3588†	A.190201/6	Pipe, tee-piece to selector valve	1	DTD.323	MR/C	
3589†	A.190201/7	Pipe, selector to reducing valve	1	DTD.323	MR/C	—
3590†	A.190201/8	Pipe, tee-piece to gauge	1	DTD.323	MR/C	
3591†	A.193654/1	Pipe, anti "G" valve to connection	1	L.54 or T.9	MR/C	
3592†	A.193654/2	Pipe, connection	1	L.54 or T.9	MR/C	
3593†	A.193654/3	Pipe, connection to elbow	1	L.54 or T.9	MR/C	
1538	Std.1285/3/BB	Connector, earthing	2	—	C.	4
4134	Std.1285/4/BB	Connector, earthing	1	—	C.	4
3839	Std.1606/44/B16	Screw, securing elbow, 4 B.A. $\times$ $\frac{1}{2}$ " long	3	Brass	MR/C	5
1720	Std.1606/44/B24	Screw, securing pressure gauge	4	—	C.	5
866	F.189989	Shackle	2	DTD.166	C.	NK.1
27VA/3445	Dunlop	Socket, quick release	1	—	A.	
	ACO.6580					
867	F.189991	Strap, air bottle	4	DTD.166	C.	NK.1
868	F.190003	Strap, air bottle	2	DTD.166	C.	NK.1
3787	Std.1507/23/035	Tube, distance, $\frac{5}{16}$ " o/d $\times$ 17 S.W.G. $\times$.35" long (Make from 30A/966)	2	T.26	MR/C	4
3808	Std.1509/23/040	Tube, distance, $\frac{3}{8}$ " o/d $\times$ 17 S.W.G. $\times$.4" long (Make from 30B/557)	1	T.4	MR/C	4
3802	Std.1509/23/085	Tube, distance, for clip securing pipe, $\frac{3}{8}$ " o/d $\times$ 17 S.W.G. $\times$.85" long (Make from 30B/557)	1	T.4	MR/C	4

† For details see Piping Chart

RESTRICTED

Hunter Mks. 4, 5, 6, 50, 51, 52
Issued with A.L.9


SERVICES—PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description					No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5				
869	F.140778	Union, reducing	...	...	...	...	1	L.1	C.	
27VB/3254	Hymatic AC.2	Valve, anti "G"	...	...	...	...	1	—	A.	
27Q/1539	Dowty D.5213Y	Valve, non-return (Mod. 447)	...	...	...	...	1	—	A.	
27VC/27	Palmer C.58	Valve, reducing	...	...	...	...	1	—	A.	
27VB/3441	Hymatic SV.9	Valve, selector	...	...	...	...	1	—	A.	
870	Std.915/B/18	Washer	...	...	...	...	3	DTD.610	C.	4

RESTRICTED

SERVICES—PILOT'S ANTI "G" INSTALLATION

Ref. No.	Part No.	Description								No. Off	Material Specification	M.R. Class of Store	Plate No.
		1	2	3	4	5							
		SUMMARY OF STOCK ITEMS											
28D/12624	A25.7B	Bolt, 4 B.A.	...	...	...	...	...	...	...	...	—	—	—
28D/12534	A25.9C	Bolt, 2 B.A.	...	...	...	...	...	...	...	...	—	—	—
28F/9501	AGS.1142/B	Nipple	...	...	...	...	...	...	...	...	—	—	—
28M/5316	A27.CP	Nut, 2 B.A.	...	...	...	...	...	...	...	...	—	—	—
28M/10215	AGS.2008/B1	Nut, 4 B.A.	...	...	...	...	...	...	...	...	—	—	—
28M/802	AGS.113/C	Nut, wing	...	...	...	...	...	...	...	...	—	—	—
28F/10020	AGS.1120/1	Piece, tee	...	...	...	...	...	...	...	...	—	—	—
28P/825	SP.4.Y.A15	Pin	...	...	...	...	...	...	...	...	—	—	—
28P/12587	SP.9.C4	Pin, split	...	...	...	...	...	...	...	...	—	—	—
28S/14005	A32.B14	Screw	...	...	...	...	...	...	...	...	—	—	—
28S/13742	A32.C14	Screw	...	...	...	...	...	...	...	...	—	—	—
28W/12355	SP.16.C	Washer, 2 B.A.	...	...	...	...	...	...	...	...	—	—	—

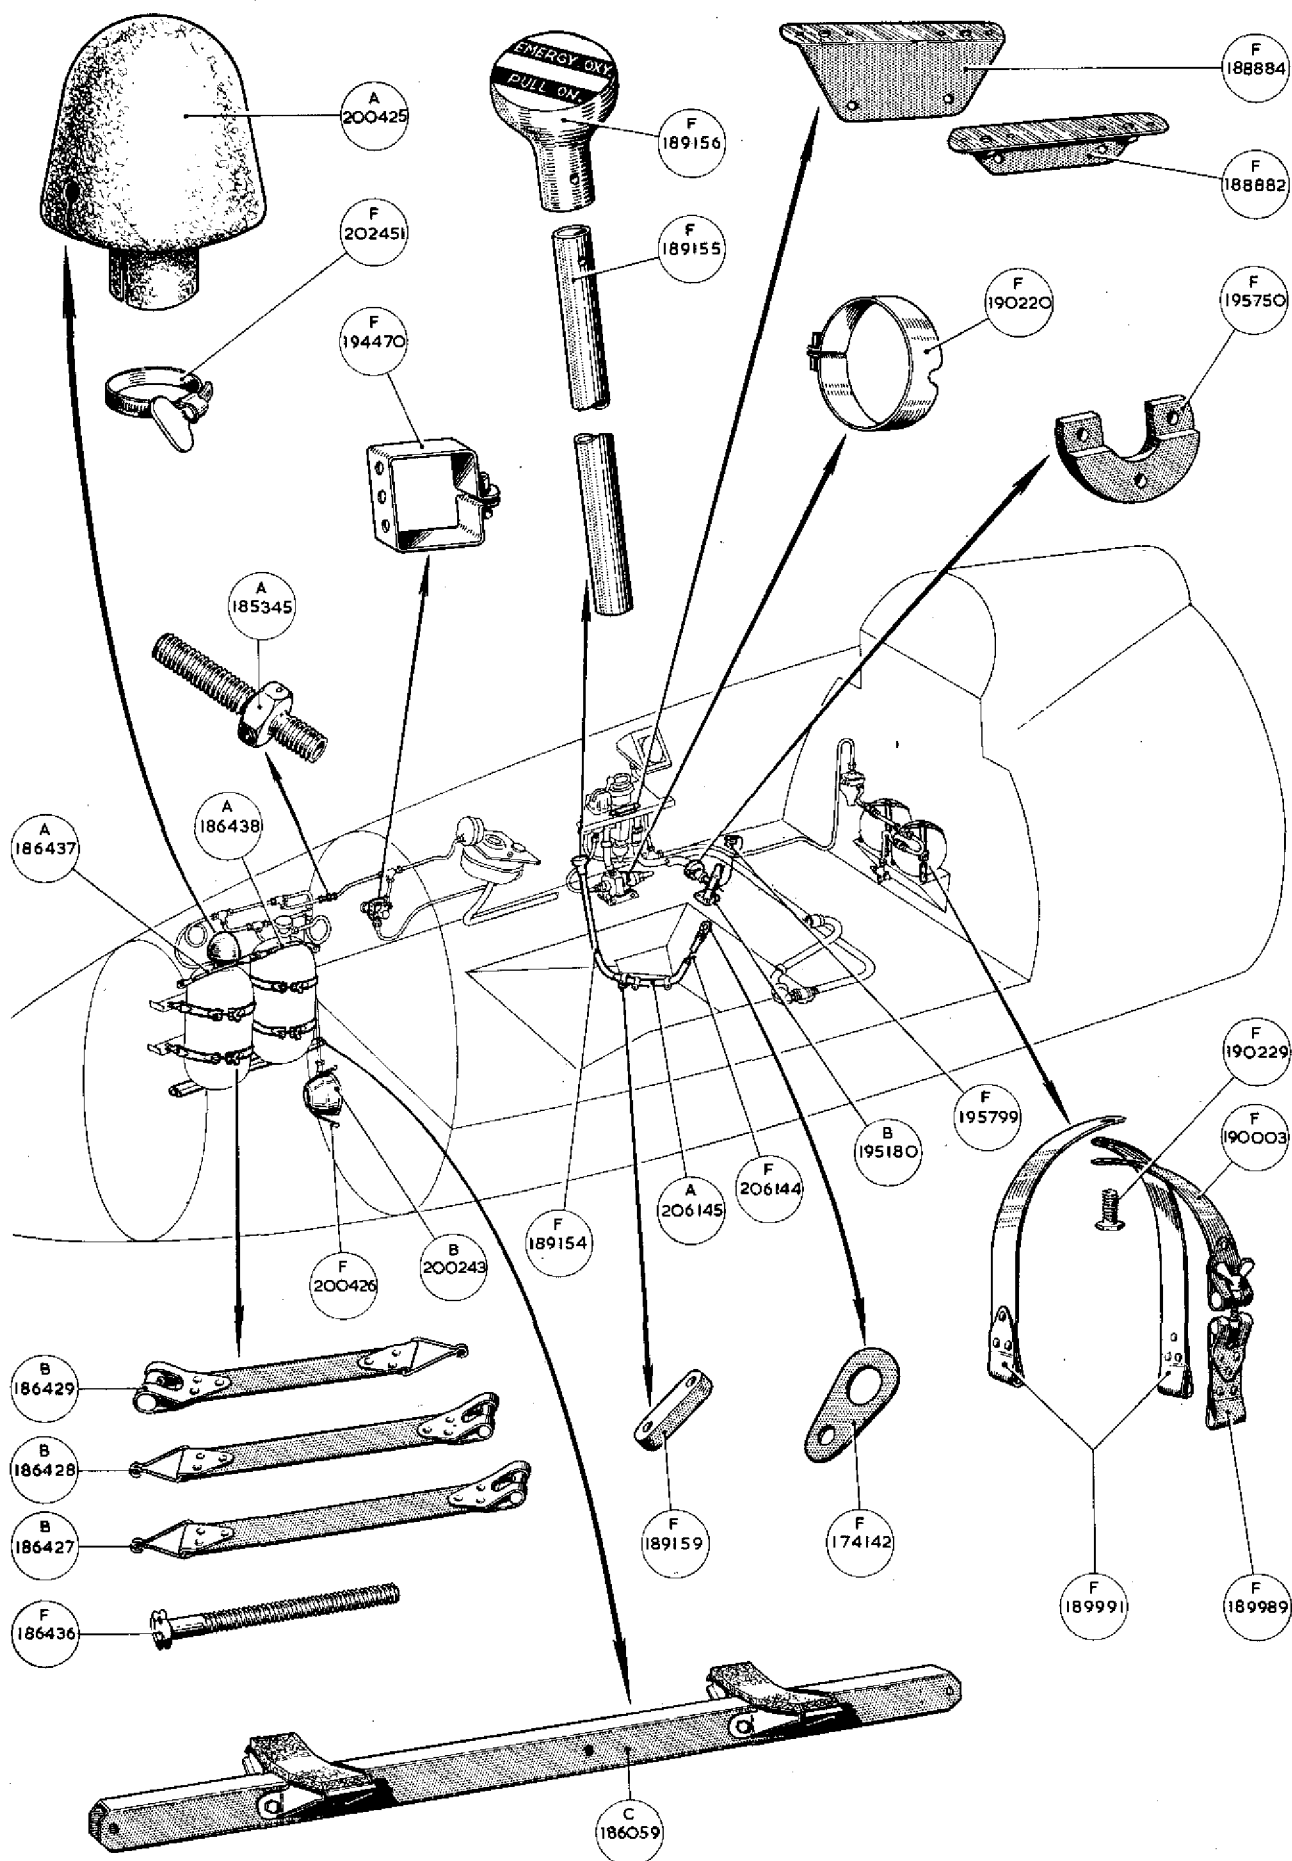

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

