

GROUP C.3

TANK PUMPS AND PRESSURE REFUELING (CODE BP AND PR)

LIST OF CONTENTS

DESCRIPTION	Para.	Para.	
Equipment employed	1	Tank pump test	12
REMOVAL AND ASSEMBLY			
Tank pumps	2	General	13
Operation	3	LIST OF ILLUSTRATIONS	
Pressure refuelling	7	Tank pumps	1
Operation	8	Pressure refuelling	2
SERVICING			
General	11	Fig.	
Equipment employed			
1. The major components employed in the tank pumps and pressure refuelling circuits are given below, together with the appropriate Air Publications to		which reference should be made for a detailed description and the necessary servicing required to maintain the equipment in an efficient condition:-	
<p>Tank pumps</p> <p>Pumps, Type 2009 Mk.2</p> <p>Pressure switches, Speed Development Co. Ltd, T.P.5250</p> <p>Control switches, Rotax, Type D.5404</p> <p>Warning lamps, Rotax H.2805 or Smiths 43CFP/24</p> <p>Relays, Type 9B, No.2</p> <p>Circuit breakers, Type A.4</p> <p>Test switch, Rotax, Type D.5503</p>			
<p>Pressure refuelling</p> <p>Solenoid valves, Mk.17</p> <p>Indicator, Flight Refuelling, Type 4506080</p> <p>Fluid level switches</p> <p>Flight Refuelling, Type D.3504147 or Hawker Pt. No. D.215808 (Front tanks)</p> <p>Smiths, Type 1696FG (Rear tanks)</p> <p>Flight Refuelling, Mk.4, series 2 (Wing tanks)</p> <p>Time switch, Venner, Type PTA/HA</p>			
<p>A.P.4343D, Vol.1, Sect. 7, Chap. -.</p> <p>A.P.1275A, Vol.1, Sect.11, Chap. -.</p> <p>A.P.4343C, Vol.1, Sect.1, Chap. -.</p> <p>A.P.4343E, Vol.1, Sect.18, Chap. -.</p> <p>A.P.4343C, Vol.1, Sect. - Chap. -.</p> <p>A.P.4343B, Vol.1, Sect.10, Chap. 6.</p> <p>A.P.4343C, Vol.1, Sect. 1, Chap. -.</p>			
<p>A.P. - Vol.1, Sect. -, Chap. -.</p> <p>A.P.4343E, Vol.1, Sect.18, Chap. -.</p>			
<p>A.P. - Vol.1, Sect. -, Chap. -.</p> <p>A.P.1275A, Vol.1, Sect.11, Chap.17.</p> <p>A.P.1275A, Vol.1, Sect.11, Chap. -.</p> <p>A.P.4343C, Vol.1, Sect.3, Chap. -.</p>			

DESCRIPTION

Tank pumps

2. The electrically-driven two-speed booster pumps, incorporated one in each front fuel tank, are supplied with current via the engine master switch (Group C.1 of this chapter). The pumps are controlled by independent on/off switches marked PORT and STBD., which are located on the forward end of the cabin starboard shelf and each pump is protected by a 25 amp. circuit breaker situated at the rear end of this shelf. The pumps normally operate continuously at low speed throughout flight, but either is capable, if run at high speed, of supplying the maximum fuel demand from the engine. The high or low speed operation is controlled by a pair of relays, situated on the supply panel, which are energized by pressure switches tapped into the pump outlet pipes and mounted on the port side of the Keel member adjacent to the pumps. The relays on the supply panel also control the operation of a pair of warning lamps, which indicate pump failure and are located one adjacent to each pump control switch on the starboard shelf. Provision is made for testing each pump, in turn, by means of a two-position test switch, marked TANK PUMPS TEST, and mounted, together with an ammeter test socket, on the rear end of the cabin starboard shelf.

Operation

3. With the engine master switch made and both pump control switches in the ON position, current will flow from the main positive supply line to both tank pumps. With the pumps operating, the contacts of the pressure switches in their outlet pipes, will close, due to the fuel pressure, and energize relays H.1 and G.1. These relays, in turn, will break the supply to the pump failure warning lamps and short circuit the resistors in the field windings of each pump. The pumps will thus operate in low speed and supply fuel to the engine driven pump, via the flow proportioner. The flow proportioner is operated by the fuel flow and ensures that equal amounts of fuel are supplied by

both pumps. As the front tanks are emptied, fuel in the remaining tanks is transferred to the front tanks under air pressure. Thus, both sides of the fuel system should empty simultaneously.

4. Should either pump be overloaded, due, for example, to a fuel surge, the appropriate circuit breaker will operate and isolate the pump from the circuit. When this occurs, the pressure switch in the outlet pipe of the affected pump will open circuit, due to the loss of output from the pump, and de-energize its relay. With the relay de-energized, the supply to the warning lamp will be made and the lamp will illuminate to indicate pump failure. At the same time, the other set of contacts in the relay will open circuit the short across the resistor in the field windings of the operative pump, which will then operate at high speed, due to the resistor now being in circuit with its field windings, to supply the necessary fuel to the engine. Under these conditions, the circuit breaker of the overloaded pump must be re-set. If the fault was temporary, the pump will recommence running in the normal manner and the other pump will revert to low speed operation when the pressure switch closes its contacts and energizes the relay.

5. If the circuit breaker refuses to hold on, this indicates that the fault is of a permanent nature and, if sufficient fuel is not available in the serviceable side of the system to complete the flight, engine speed must be reduced and the sound pump switched OFF by means of its control switch. Under this condition, the fuel will be supplied to the engine equally from both sides of the system under gravity and transfer air pressure. The sound pump should, however, be switched on again for landing.

6. The two-position test switch and ammeter socket, used to test the tank pumps for correct functioning, as described in para.12 of this group, are coupled to the engine starter circuit breaker (Group C.1 of this chapter) and obtain their positive supply from this source. The test switch on the starboard shelf,


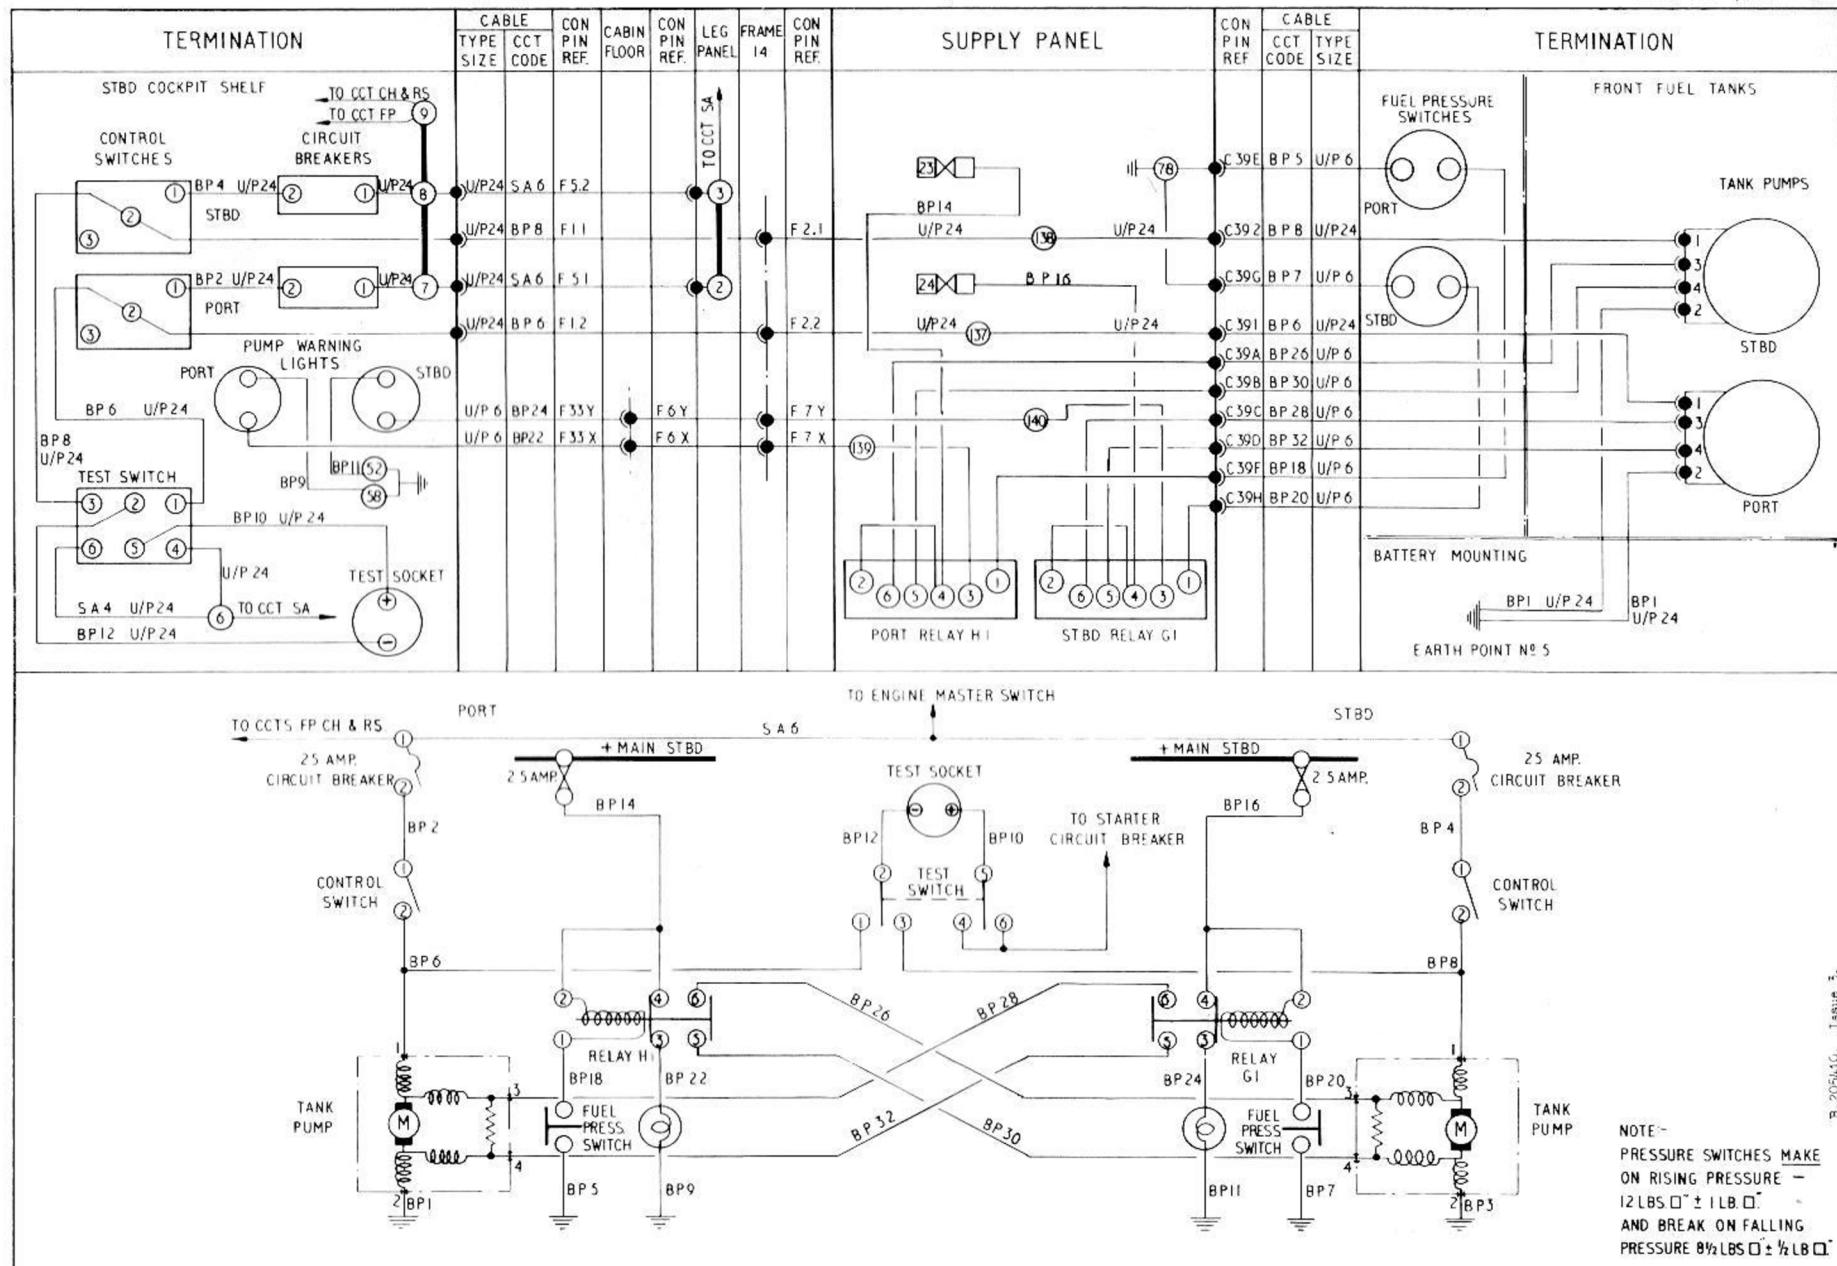


FIG. I. TANK PUMPS

RESTRICTED

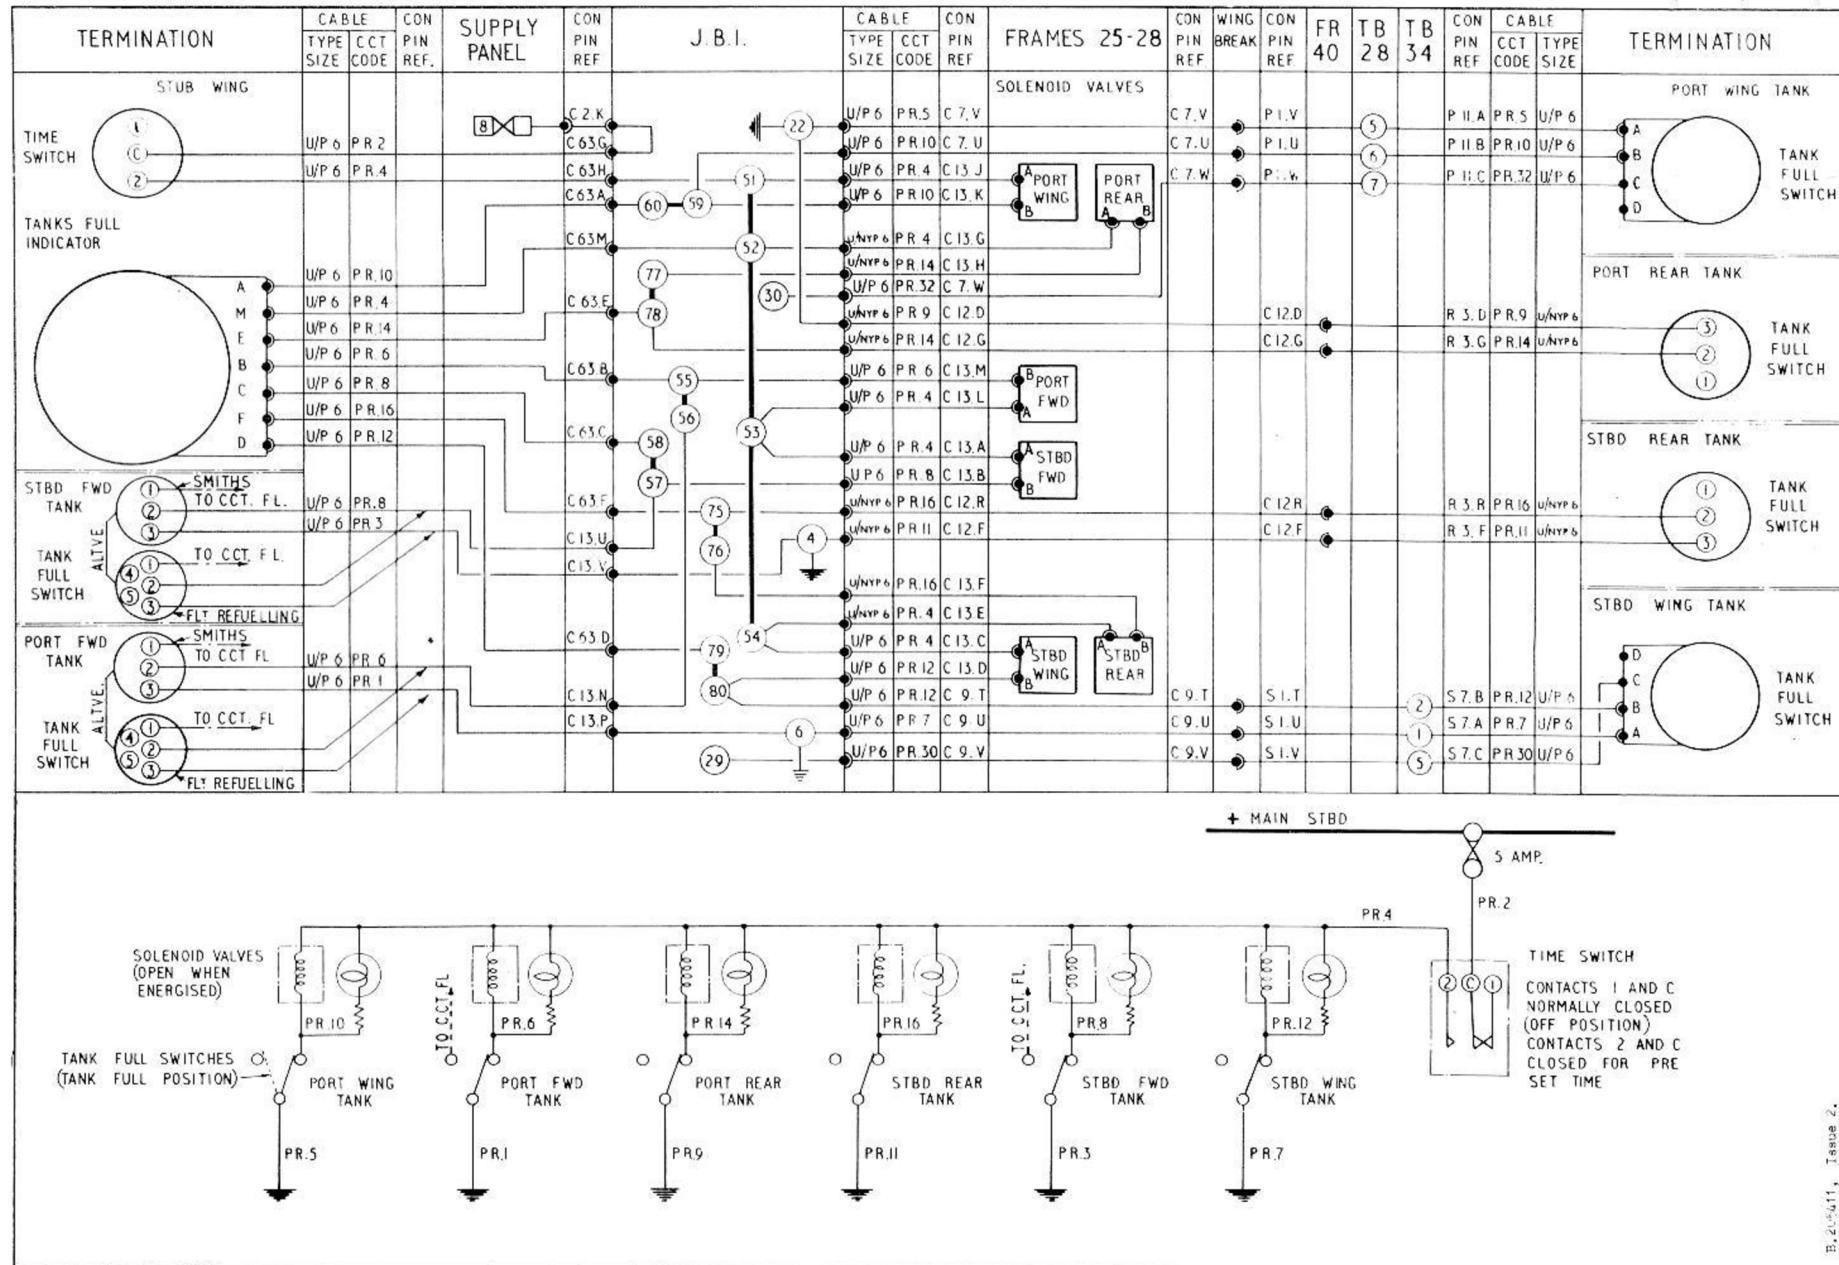

feeds each pump, in turn, irrespective of the position of the control switches provided that the engine master switch is OFF. For a full description of the fuel system as a whole, reference should be made to Section 4, Chapter 2 of this volume.

Pressure refuelling

7. The aircraft is refuelled under pressure through a standard $1\frac{1}{2}$ in. coupling situated in the port wheel bay, the operation being controlled by a pre-set time switch mounted in the port stub wing adjacent to the refuelling coupling. The time switch energizes six solenoid operated refuelling valves, located in the fuel pipe lines to the port and starboard front, rear and wing fuel tanks. These valves are controlled by fluid level switches located one in each front, rear and outboard wing tank. Filament lamps, carried in an indicator located in the stub wing adjacent to the time switch, are wired in parallel with each refuelling valve solenoid to indicate when the valves are open during refuelling.

Operation

8. To fully understand the function of the pressure refuelling circuit it is necessary to trace the sequence of operations which take place whenever the aircraft is refuelled. It should be noted that the battery master switch must be set to the ON position or an external supply connected, before refuelling can commence, as an electrical supply is required to energize the refuelling valves.

9. At the commencement of the refuelling operation, the bowser hose is connected to the refuelling coupling and the pump started with its controls set to REFUEL. The time switch is then set and makes contacts C and 2, thus completing the circuit to all six refuelling valve solenoids and the indicator lamps. The refuelling valves open when the

solenoids are energized to allow fuel from the bowser to pass into all tanks and the indicator lamps light to show that the valves are open. As each tank becomes full, its fluid level switch opens and de-energizes the solenoid of the refuelling valve, which closes to cut off the fuel supply to that tank. The indicator lamp will also be extinguished to show that the valve has closed.

10. Refuelling is complete when all the refuelling valves have closed and all indicator lamps are extinguished. The time switch is then switched off, if it has not already completed its full travel, but is not switched off, after refuelling, it will automatically switch itself off after approximately 8 minutes. The time switch ensures that the refuelling circuit is disconnected from the positive supply at all times, apart from actual refuelling operations. This ensures that the refuelling valve solenoids do not become energized again, when the fluid level switches close as the fuel is consumed, as this would cause cross-transfer between the tanks, via the refuelling pipe lines. For a full description of the fuel and refuelling system, reference should be made to Section 4, Chapter 2 of this volume.

SERVICING

General

11. For general servicing of the electrical system as a whole, reference should be made to Group A of this chapter. The contacts of the pressure refuelling time switch should be kept clean and inspected for signs of pitting, which if found must be removed in the approved manner. These operations should only be carried out by competent personnel, as the switch contains a delicate clockwork mechanism. Apart from checking the filament lamps in the refuelling indicator for serviceability, keeping all the components clean and carrying out

the normal routine tests of security and serviceability, as described in the appropriate Air Publications, listed in para.1, the only other servicing required is the tank pump test, described in the following paragraph.

Tank pump testing

12. To test the pumps for correct functioning, connect an ammeter to the test socket located on the cabin starboard shelf. Ensure that the battery master switch is in the ON position, or that an external supply is connected and check that the engine starter circuit breaker is CLOSED. Trip each pump circuit breaker or ensure that the engine master switch is OFF and select each pump in turn by operating the test switch located adjacent to the ammeter test socket. With the pump under test operating at high speed, i.e. the other pump indicator showing "OFF", the ammeter should show a reading of less than 25 amp., but if the other pump indicator is showing "ON" the pump under test will be operating at low speed and a reading of less than 18 amp. should be indicated on the ammeter. If the readings are above these values, the cause must be investigated and rectified before the next flight. After test, re-set the circuit breakers, if tripped during test.

NOTE...

The reason for quoting the low speed test current is due to the fact that immediately after refuelling the fuel pressure switches in the pump outlet pipes may be closed by the refuelling pressure and the pumps will therefore operate at low speed as described in para.3.

REMOVAL AND ASSEMBLY

General

13. The removal of the tank pumps, refuelling valves and fluid level switches is fully described and illustrated in Section 4, Chapter 2 of this volume. Once access has been obtained, the removal of the remaining components forming the tank pumps and pressure refuelling circuits, should present no unusual difficulties. The removal of the cabin starboard shelf, which carries the control switches and circuit breakers of the tank pumps circuit is fully described in Group A.2 of this chapter, while the location and access to all components is indicated in Group A.3 also of this chapter.

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

