

Chapter 3

SWITCH, MAGNETIC, TYPE 2A, No. 2 (ROTAX F3109)

LIST OF CONTENTS

	Para.
Introduction... ..	1
Description	2

LIST OF ILLUSTRATIONS

	Fig.
Type 2A, No. 2 magnetic switch	1
Diagram of connections	2

LEADING PARTICULARS

Switch, magnetic, Type 2A, No. 2	Stores Ref. 5CW/4377
Voltage	112V, d.c.
Minimum pull-in voltage (20 deg. C)	16V, d.c.
Drop-out voltage	5 to 2V, d.c.
Operating coil resistance	179 ohm
Current rating	5 amp.
Overall dimensions of base	3.128 by 3.0 in.
Height (approx.)	3.5 in.
Weight	15.75 oz.

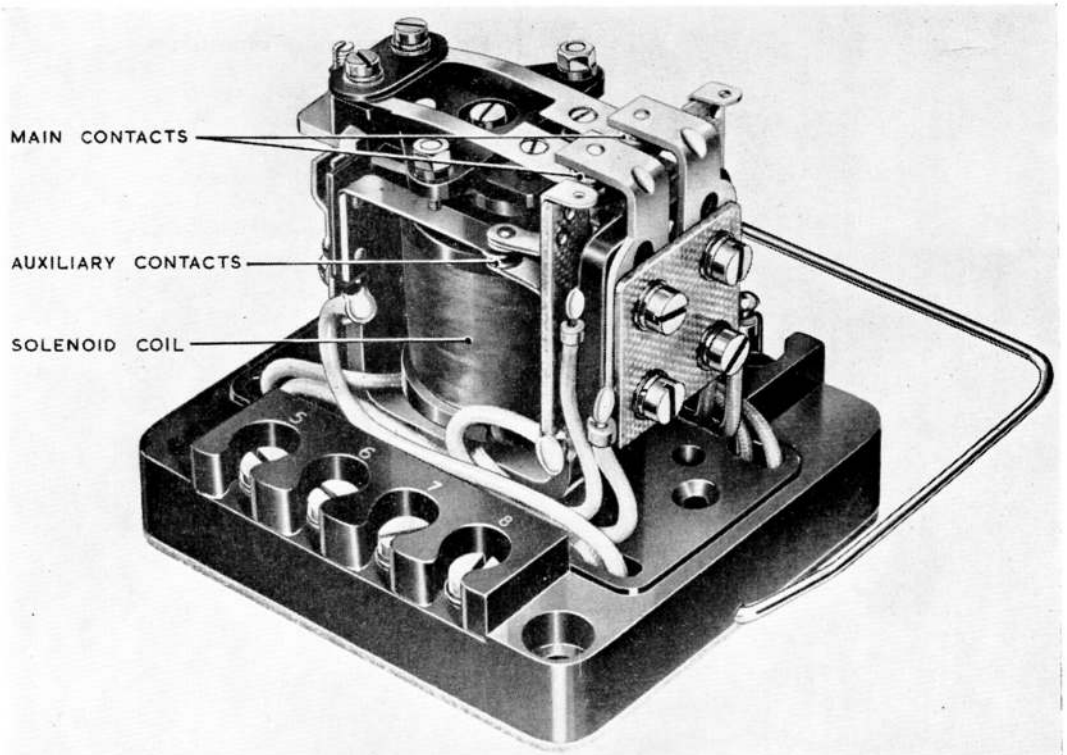


Fig. 1. Type 2A, No. 2 magnetic switch

(A.L.24, June, 55)

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

