

Chapter 41

SWITCH, MAGNETIC, TYPE 3B, No. 2 (ROTAX F3112)

LIST OF CONTENTS

	Para.
Introduction... ..	1
Description	2

LIST OF ILLUSTRATIONS

	Fig.
Type 3B, No. 2 magnetic switch	1
Diagram of connections	2

LEADING PARTICULARS

Switch, magnetic, Type 3B, No. 2	Stores Ref. 5CW/4380
Voltage	28V, d.c.
Minimum pull-in voltage (20 deg. C.)	14.5V, d.c.
Drop-out voltage... ..	5 to 2V, d.c.
Current rating	5 amp.
Operating coil resistance	179 ohm
Pilot coil resistance	50.5 ohm
Delay	55 to 75 milliseconds
Overall dimension of base	3.128 by 3.0 in.
Height (approx.)	3.5 in.
Weight	16 oz.

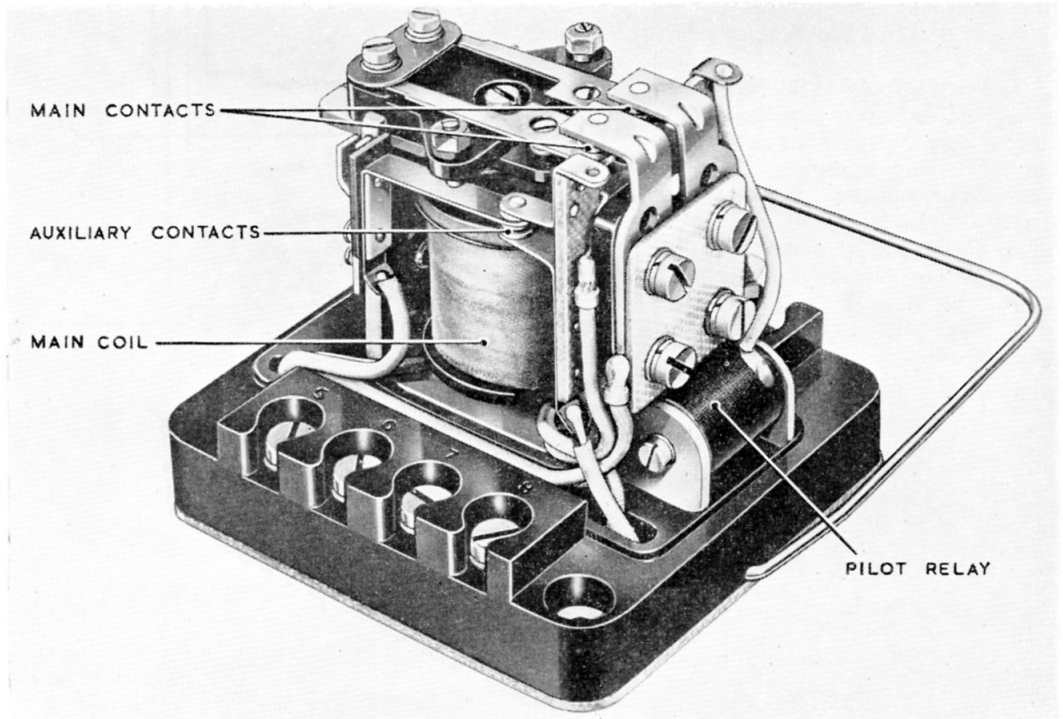


Fig. 1. Type 3B, No. 2 magnetic switch

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.

