

CHAP	2	SP 108	SERVICING PROCEDURES				AP 101B-1000-5A3F (Section 2 (1st Edition))	
TRADE	AIR COMMS		LIGHTNING					
SHEET	1	OF	1	SHEET/S	3	5	6	AL 23

TIME	ACT
EST	

TITLE	ARI 23329/1, Sonar Locator Beacon - Self Test.
-------	--

RAF Form 2988B
(Revised Jan 78)

SERVICING RECORD

Aircraft/Equipment
Ser No:
Date:

Safety and Servicing Notes are to be complied with throughout the work detailed on this Card.

Special Tools and Equipment

Stop Watch, 6B 9101001.

- AIR COMMS
1. Examination
 - 1.1 Sonar locator beacon.
 - (i) Examine.
 - (ii) Ensure secure.
 2. Sonar Locator Beacon - Testing
 - 2.1 Pressure diaphragm switch.
 - (i) Using finger pressure only, operate.
 - (ii) Ensure regular acoustic pulsing is heard.
 - (iii) Ensure the rate of pulse is 5 pulses in 7 to 10 seconds.
 - (iv) Release switch.
 - (v) Ensure pulsing stops.


Tradesman Man Hrs	Tradesman Initials	Brief Details of Suspected Defect and MOD F720 ORN/SNOW When Applicable	Supervisor Man Hrs	Supervisor Initials
1	2	3	4	5

ASSOCIATED PROCEDURE CARDS

ASSOCIATED TRADES	
SP NO	108

SMS/3 STC



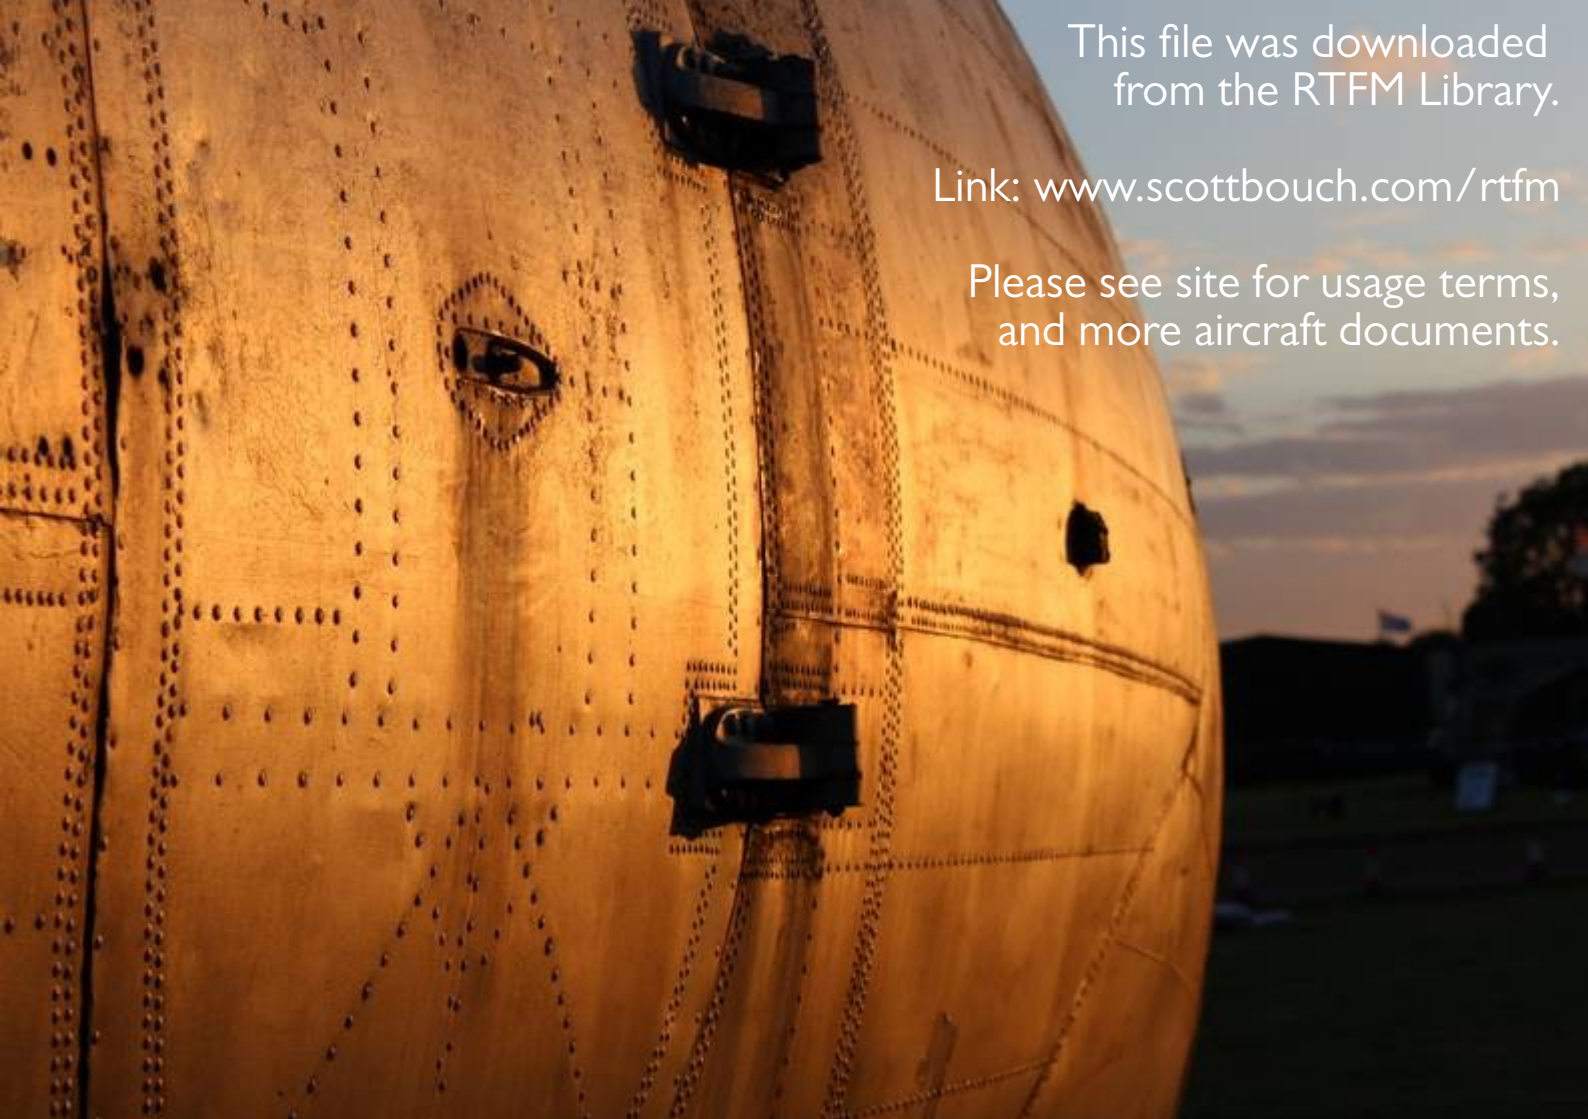

This file was downloaded
from the RTFM Library.

Link: www.scottbouch.com/rtfm

Please see site for usage terms,
and more aircraft documents.